

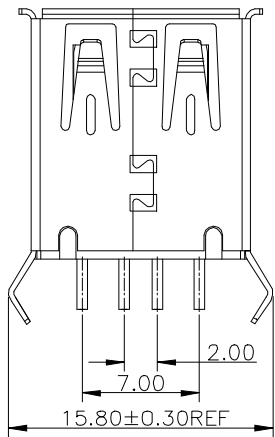

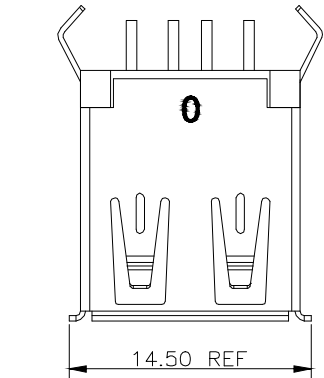


② **USB2.0 COMPLIANT**

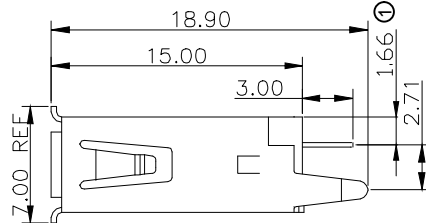

RoHS compliant

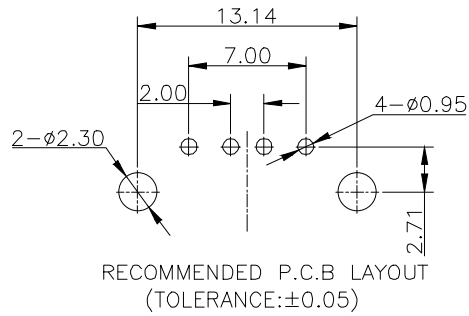

NOTES:

1.Material:

- 1.1 Housing: **PBT+30%GF UL94V-0, Color White**
- 1.2 Shell: **SPCC**
- 1.3 Contact :**Phosphor Bronze**

2. FINISH:

- 2.1 Contact Area: **Selective 30u"Au**
- Solder Area: Tin Plated**
- Under: Ni Plated**

3.MECHANICAL:


- 3.1 Mating Force:**3.57kgf Max.**
- 3.2 Unmating Force:**1.02kgf Min**
- 3.3 Durability:**1500 cycles Min**

4.ELECTRICAL:

- 4.1 Current Rating:**1.5A**
- 4.2 Dielectric Strength:**500V AC FOR 1 MINUTE**
- 4.3 Contact Resistance:**30mΩ Max**
- 4.4 Insulation Resistance:**1000 MΩ Min**

5.Operating temperature: -55°C TO +85°C

6.PACKIING: Tray

| | | | | | | | | |
|-----------|-------|-----|-------------------|------------|--------|---|------------|----------------------|
| Scale | Free | | | | | Date | Name | Customer-No. |
| TOLERANCE | | | | | | Drawn | 22.04.2014 | Winnie |
| .X | ±0.30 | | | | | Approved | 30.12.2016 | Winnie |
| .XX | ±0.20 | | | | | | | ASSMANN WSW-No. |
| .XXX | ±0.10 | ② | Update | 12.08.2019 | Winnie | | | A-USB/2-A-TOP |
| DIM | TOL | ① | Add the dimension | 30.12.2016 | Winnie |  | | Drawing-No. |
| X.° | ±5° | | | | | | | ASS 6346 CO |
| Angle | TOL | ③ | Drawn | 22.04.2014 | Winnie | Replace | | SHEET |
| UNIT | mm | Id. | Modification | Date | Name | | | |