


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-1P	NEMA 1-15P, polarized	1	black overmold
2	30-00242	2C, 18 AWG, UL SPT-1, 300V, 105C, 5.55 mm, VW-1, PVC	1	

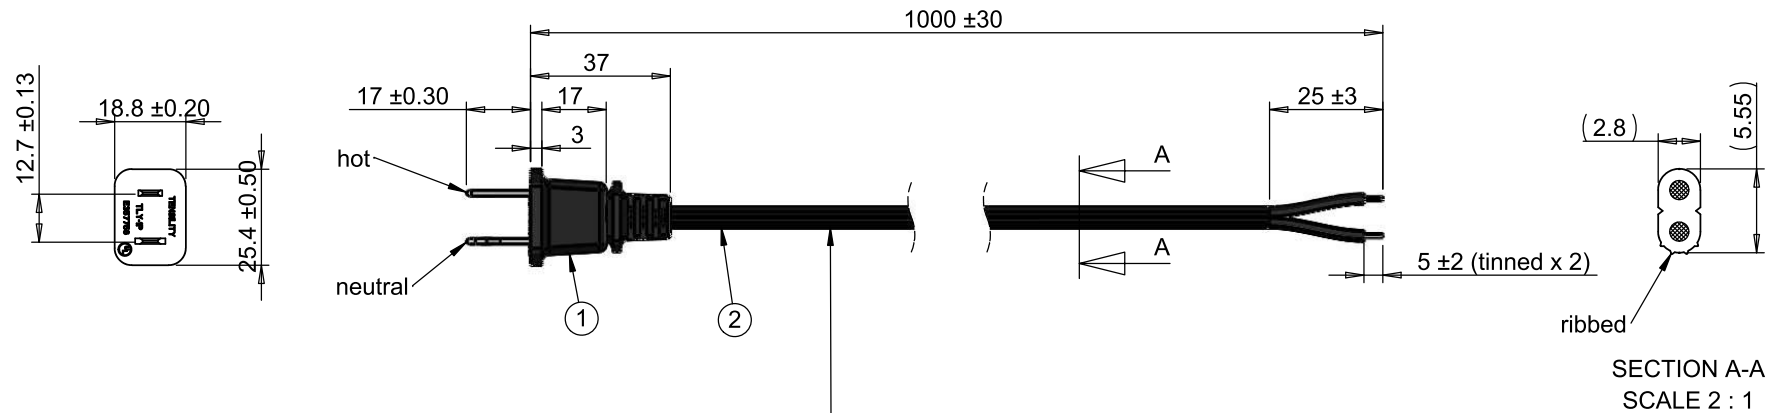

Wire marking: (UL) E339575 SPT-1 2x0.824 mm2 (18AWG) 105C 300V VW-1 C(UL) SPT-1 2x0.824 mm2 (18AWG) 105C 300 V VW-1 Tensility HLE

Wiring Diagram	
1-15P	wire
hot	smooth
neutral	ribbed

Notes:
Electrical requirements: 10 A at 125 Vac

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/17/2012	Intial release	DN <small>Digitally signed by DN Date: 2017.01.26 10:42:41 -08'00'</small>	RoHS compliant	
			Verified: PS <small>Digitally signed by PS Date: 2017.01.26 14:37:18 -08'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Ac cord, 1000 mm, U.S, NEMA 1-15P plug, TLY-1P to tinned, 18 AWG, SPT-1 wire, 30-00242	Size: A
					Part number: 11-00018
					Scale: 1:1
					Sheet 1 of 1