


"▽" CRITICAL DIMENSIONAL.

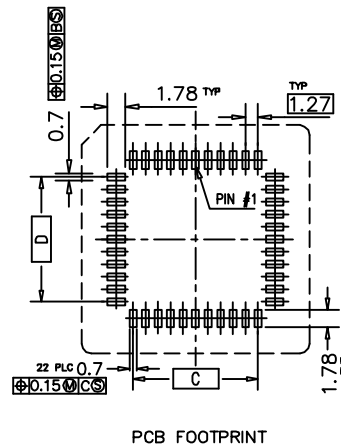

MATERIAL:  
 HOUSING: PPS+30% GF UL94 V-0, BROWN.  
 CONTACT: PHOSPHOR BRONZE.  
 FINISH:  
 CONTACT: 100 μ" MIN SN ONLY PLATED ON SOLDERING  
 END OVER 50 μ" MIN. NICKEL UNDER-PLATING.

SPECIFICATION:  
 CURRENT RATING: 1 A.  
 VOLTAGE RATING: 250 V.  
 DIELECTRIC STRENGTH: 600V FOR 1 MINUTE.  
 CONTACT RESISTANCE: 20 mΩ MAX.  
 INSULATOR RESISTANCE: 1000MΩ MIN. AT 500V DC.  
 SOLDERING TEMPERATURE: 260°C  
 TEMPERATURE: -55°C ~ +105°C  
 DURABILITY: 25 CYCLES.

NO. OF POSITIONS	A	B	C	D	E	F	G	H	I	J
84	35.90	35.90	25.40	25.40	45.20	26.80	26.80	2.90	29.69	29.69
68	30.82	30.82	20.32	20.32	37.98	21.72	21.72	2.90	24.61	24.61
52	25.74	25.74	15.24	15.24	30.78	16.64	16.64	2.75	19.53	19.53
44	23.20	23.20	12.70	12.70	27.20	14.3	14.3	2.90	16.99	16.99
32	18.12	20.66	7.62	10.16	21.89	9.16	11.60	2.6	11.90	14.45
28	18.12	18.12	7.62	7.62	20.00	6.70	6.70	2.75	11.90	11.90
20	15.58	15.58	5.08	5.08	16.38	4.16	4.16	2.75	9.36	9.36

-TOLERANCES-  
UNLESS OTHERWISE SPECIFIED

CnC Tech, LLC

TITLE: PLCC-SMT SOCKET

.X ±0.25	X' ± 2"	APPD:	PRODUCT NO: 232-XX-TR
.XX ±0.15	X'X' ± 1"	CHECK:	DATE   SCALE   UNIT   TYPE   PAGE
.XXX ±0.10		DRAW:	2012/04/06   1:1   mm   Z   1 / 1