



Heavy Duty Security Proximity Sensor
Part Number: PRA-SP-050K N/O Contacts & Supervisory Loop
Product Data Sheet (Suggested Magnet PRM-SP-020 or PRM-SP-021)

PICTURE	DIMENSIONS
---------	------------

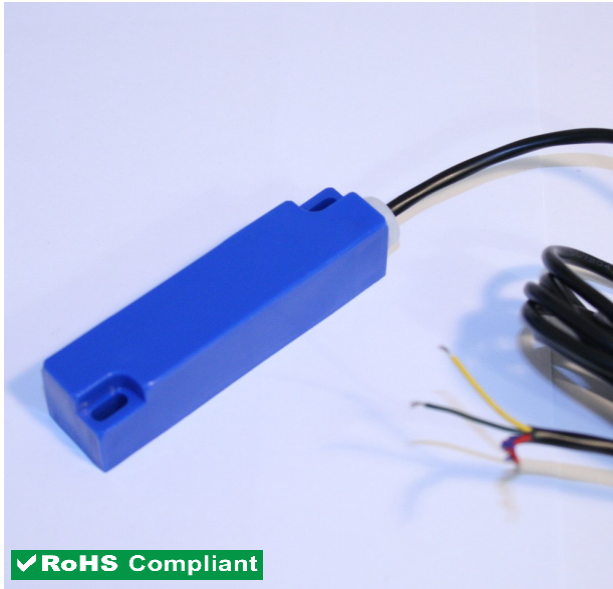

✓ RoHS Compliant

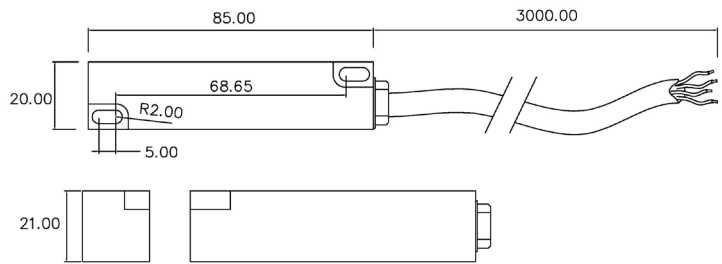

Drawings not to scale
 All dimensions in mm nominal

SPECIFICATION		
---------------	--	--

Contact Form / Style	Normally Open	
Supervisory Security loop	Yes	
Switching Voltage	Max Volts DC/AC	400
Switching Capacity	Max W/VA	60
Switching Current	Max Amps	1.0
Carry Current	Max Amps	2.0
Insulation Resistance	Max MOhms	100
Contact Resistance	Max mOhms	100
Operating Temperature	Celsius	- 40° to 85°
Case Material	Nylon 66	- 40° to 85°
Cable	4 Core 0.5mm PVC insulated Blue, Red, Yellow, Green	

Applications Include	Options
----------------------	---------

- Security Doors .
- Automatic Gates
- Barriers.
- Alarm Systems.

- Normally closed & change over versions available.
- Armour cable option.

Did you know we also sell?



- Custom cable types, cable lengths, connectors or crimp terminals available.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

Rev. No.	Revision Note	Date	Signature
1	Datasheet	10-10-19	BR



ISO 9001:2008
 Certificate No. FM21080

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236 www.comus-intl.com Fax: +44 (0)1255 862014

©2016 Copyright Comus Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.
 USA: Comus International:+1 973 777 6900, Belgium: Comus Belgium BVBA: +32 (0)12 390400