THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS in [mm]				
		A ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,51]	M ± .03 [0,8]	H ± .01 [0,3]
PV22-2R	#2	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.10 [2,54]
PV22-4R	#4	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.12 [3,05]
PV22-6R	#6	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.15 [3,81]
PV22-8R	#8	.78 [19,81]	.26 [6,60]	.26 [6,60]	.65 [16,51]	.17 [4,32]
PV22-10R	#10	.78 [19,81]	.32 [8,13]	.24 [6,10]	.62 [15,75]	.20 [5,08]

INSTALLATION TOOLS
CT-520
CT-1525 (A POCKET)
CT-2500 (CT-2525CH: A PKT)

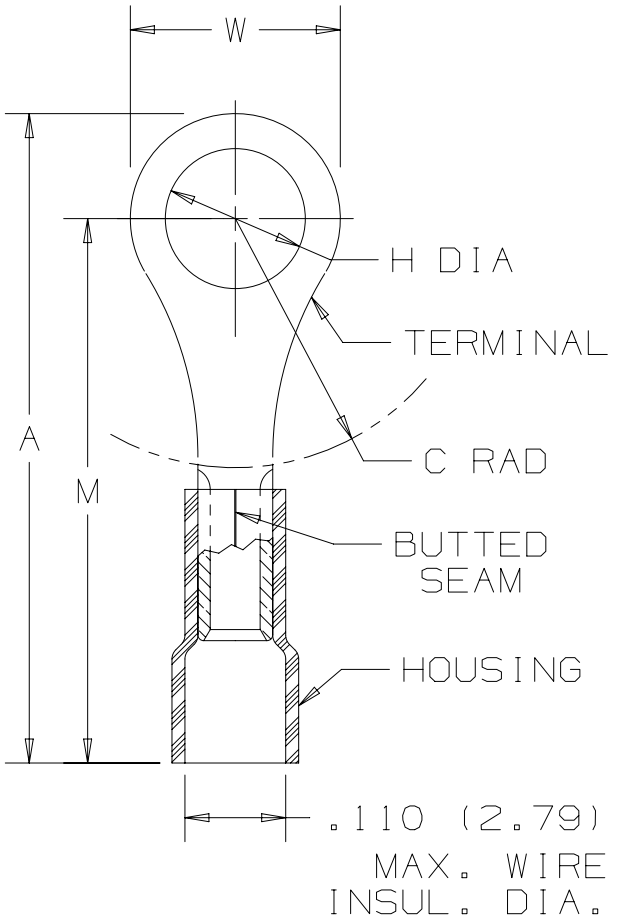

NOTES:

1. RECOMMENDED FOR:
   A. #26-22 AWG SOLID OR STRANDED COPPER WIRE
   B. 221°F [105°C] MAX TEMP. RATING
   C. 600V MAX VOLTAGE RATING

2. MATERIAL:
   A. STAMPING - .02" [0,5] THK COPPER, TIN PLATED
   B. HOUSING - VINYL, YELLOW

3. SEE www.panduit.com FOR PACKAGE QUANTITIES

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

5. WIRE STRIP LENGTH: 3/16" $^{+1/32}_{-0}$ [4,8mm $^{+0,8}_{-0}$]

Panduit part numbers shown ion this drawing meet the material requirements of RoHS (European Directive 2002/95/EC on the Restriction of Hazarduos Substances) as proposed by the Technical Adaption Committee.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10	4/15	TMR	JHNU	RGB	ADDED A POCKET WITH CT-1525, CT-2500 TOOLS	N41230BA-A41230
09	1/14	JHNU	JHNU	RGB	ADDED WIRE TO MAX. INSUL. DIA.	N41230BA-A41230
08	11/13	JHNU	JHNU	RGB	BUTTED SEAM WAS BRAZED SEAM	N41230BA-A41230

TITLE

RING TERMINAL, VINYL INSULATED #26-22 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: N41230BA/10

DATASET FILE NAME: N41230BA/10

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ±

.XX ± ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41230

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
DAW		CJH	NONE		A

D10100DA/16