



Flange	Polyamide PA66 GF25 V-0
Elastomeric plate:	EPDM according to automotive standards; VW 2.8.1 G50, DBL 5556.10; DBL 5556.20; DBL 5556.21; ozone resistant according to DIN 53509, Level 0 (best level)
Sealing	TPE TPV

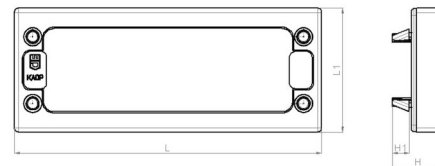

### Properties

	<ul style="list-style-type: none"> <li>Technology: tool-free connecting technology for cabling of machines and equipment</li> <li>Application: for introduction of cables, tubes, pneumatic and hydraulic pipes</li> </ul>
Temperature range	-30 °C +100 °C
Protection grade	IP66
Test standard	UL 514B
UL / CSA-File	E140310
Overall dimension	L = 147,5 mm, L1 = 59,5 mm H = 25,0 mm, H1 = 8,2 mm

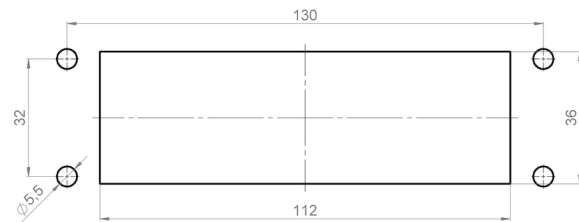



F305-924x-xx

### Features

● schwarz

Number of openings of the cable entry plate for cable diameter:

Descr iption	3,0- 5,5	3,0- 6,5	4,1- 8,1	5,0- 9,2	8,0- 12,0	8,0- 12,5	9,0- 14,0	9,6- 15,9	14,0- 20,0	 VPE	Part No.
KADP 24/11	-	4	-	4	-	-	-	-	3	1	F305-9240-00
KADP 24/12	0	0	0	0	12	0	0	0	0	1	F305-9240-01

Descr iption	3,0- 5,5	3,0- 6,5	4,1- 8,1	5,0- 9,2	8,0- 12,0	8,0- 12,5	9,0- 14,0	9,6- 15,9	14,0- 20,0	 VPE	Part No.
KADP 24/13	2	-	6	-	-	-	4	-	1	1	F305-9240-02
KADP 24/14	-	6	-	4	-	-	-	4	-	1	F305-9240-03
KADP 24/17	-	-	-	17	-	-	-	-	-	1	F305-9240-04
KADP 24/17- 1	-	11	1	-	-	5	-	-	-	1	F305-9240-05
KADP 24/22	-	16	-	4	-	2	-	-	-	1	F305-9240-06
KADP 24/23	-	-	23	-	-	-	-	-	-	1	F305-9240-07
KADP 24/29	-	29	-	-	-	-	-	-	-	1	F305-9240-08
KADP 24/BLI	-	-	-	-	-	-	-	-	-	1	F305-9240-99