


P1: M-003

P2: M-028A

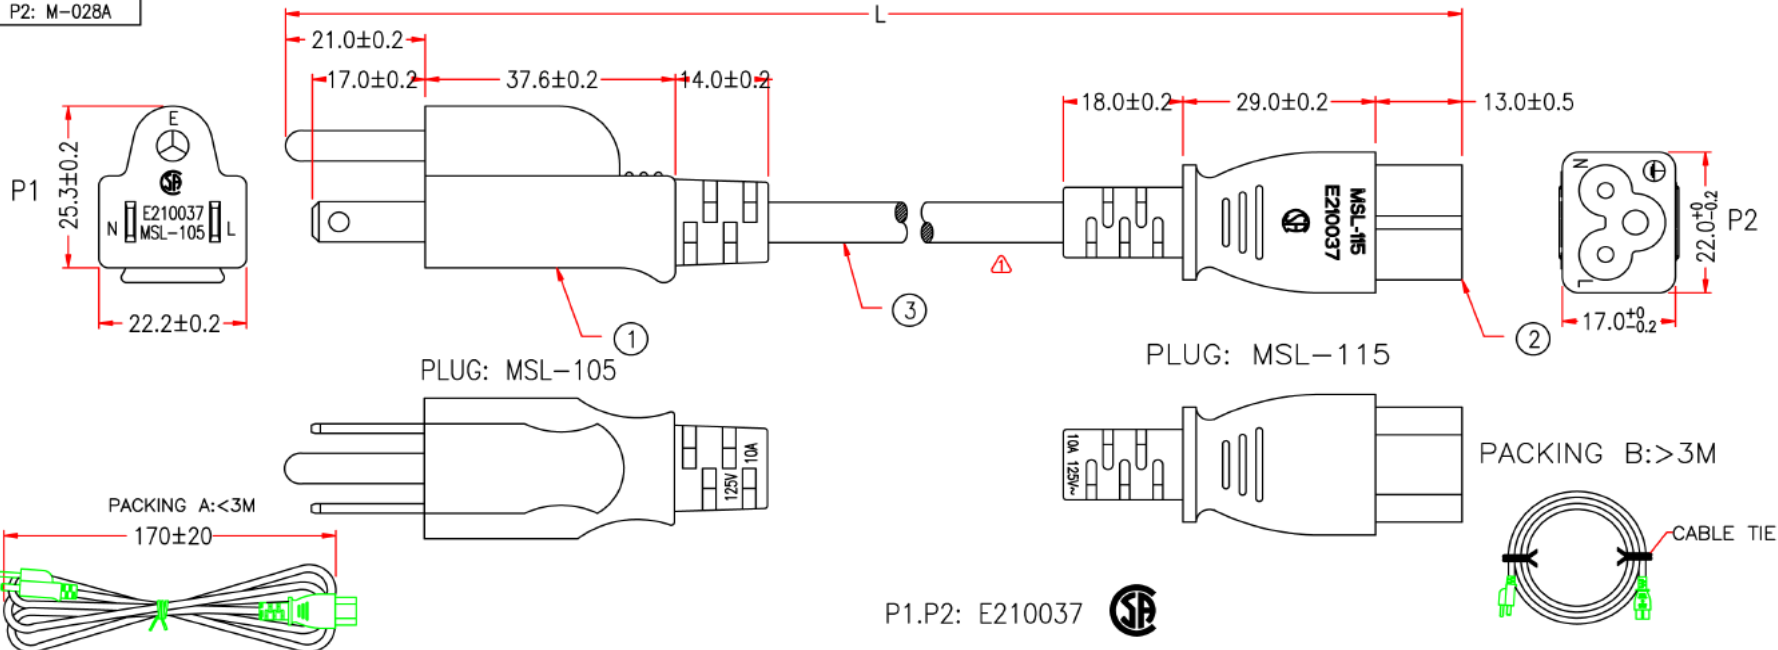

P1.P2: E210037

NOTE: All relevant materials are complied with RoHS directive .

MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978
 CSA SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

No.	DESCRIPTION	Q'TY	Supplier
3	UL SVT 18AWG x 3C, OD 6.3mm, JACKET BLACK, DRAWING No.EPSVT011803C-008	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-008	1	M767
	TERMINAL: 98732PS-0	1	M257
	TERMINAL: 98714PS-0	2	M257
1	MOLDED PVC BLACK, 35P		M304
	BRACKET: YS-002	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: Ø4.75mm 321203	1	M769
APPROVED			Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	29/OCT/09	
DRAWING	LI	29/OCT/09	



RE.1 2009.10.29 TAKE OFF LABEL

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm