


MATERIAL

Phenolic based (PF) Duroplast, black colour, glossy finish.

STANDARD EXECUTIONS

- **VC.192-A:** black-oxide steel boss, threaded or plain blind hole.
- **VC.192-B:** brass boss, plain or threaded blind hole.
- **VC.192-SST:** AISI 303 stainless steel boss, threaded blind hole.
- **VC.192-SST-p:** AISI 303 stainless steel threaded stud, chamfered flat end according to ISO 4753 (see Technical data on page A-10).

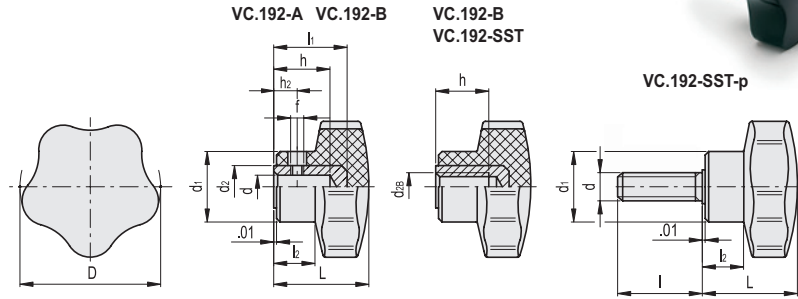

ELESA Original design

VC.192-A

Code	Description	D	d	d2B	L	d1	d2	l1	l2	h	h2	f	⚖
967122	VC.192/60 A-3/8-16	2.36	-	3/8-16	1.46	1.06	-	-	0.67	0.67	-	-	0.18
967124	VC.192/60 A-1/2-13	2.36	-	1/2-13	1.46	1.06	-	-	0.67	0.79	-	-	0.19
967132	VC.192/60 A-3/8	2.36	0.375	-	1.46	1.06	0.67	1.02	1.06	0.79	0.35	1/4-20	0.24
967134	VC.192/60 A-1/2	2.36	0.500	-	1.46	1.06	0.79	1.18	0.67	0.98	0.35	1/4-20	0.2
967152	VC.192/70 A-1/2-13	2.76	-	1/2-13	1.73	1.18	-	-	0.79	0.79	-	-	0.29
967154	VC.192/70 A-1/2	2.76	0.500	-	1.73	1.18	0.79	1.18	0.79	0.98	0.43	1/4-20	0.3
967182	VC.192/85 A-5/8-11	3.35	-	5/8-11	2.17	1.38	-	-	1.18	0.87	-	-	0.42

VC.192-B


Code	Description	D	d	d2B	L	d1	d2	l1	l2	h	h2	f	⚖
967032	VC.192/30 B-1/4-20	1.26	-	1/4-20	0.91	0.75	-	-	0.39	0.39	-	-	0.04
967062	VC.192/40 B-1/4-20	1.57	-	1/4-20	1.06	0.83	-	-	0.47	0.47	-	-	0.08
967064	VC.192/40 B-5/16-18	1.57	-	5/16-18	1.06	0.83	-	-	0.47	0.51	-	-	0.07
967072	VC.192/40 B-1/4	1.57	0.250	-	1.06	0.83	0.47	0.67	0.47	0.55	0.28	10-32	0.08
967074	VC.192/40 B-5/16	1.57	0.312	-	1.06	0.83	0.63	0.79	0.47	0.63	0.28	10-32	0.07
967092	VC.192/50 B-5/16-18	1.97	-	5/16-18	1.3	0.98	-	-	0.55	0.71	-	-	0.12
967094	VC.192/50 B-3/8-16	1.97	-	3/8-16	1.3	0.98	-	-	0.55	0.67	-	-	0.11
967102	VC.192/50 B-5/16	1.97	0.312	-	1.3	0.98	0.59	0.98	0.55	0.79	0.31	10-32	0.16
967104	VC.192/50 B-3/8	1.97	0.375	-	1.3	0.98	0.59	0.98	0.55	0.79	0.31	10-32	0.14

VC.192-SST

Code	Description	D	d2B	L	d1	l2	h	⚖
966226	VC.192/30 S-1/4-20-INOX	1.26	1/4-20	0.91	0.75	0.43	0.39	0.04
966346	VC.192/40 S-5/16-18-INOX	1.57	5/16-18	1.06	0.83	0.47	0.51	0.07
966476	VC.192/50 S-3/8-16-INOX	1.97	3/8-16	1.3	0.98	0.55	0.67	0.12

VC.192-SST-p

Code	Description	D	d2A	L	d1	l	l2	⚖
966262	VC.192/30 S-p-1/4-20x1/2-INOX	1.26	1/4-20	0.91	0.75	0.500	0.43	0.04
966263	VC.192/30 S-p-1/4-20x3/4-INOX	1.26	1/4-20	0.91	0.75	0.750	0.43	0.05
966264	VC.192/30 S-p-1/4-20x1-INOX	1.26	1/4-20	0.91	0.75	1.000	0.43	0.05
966383	VC.192/40 S-p-5/16-18x3/4-INOX	1.57	5/16-18	1.06	0.83	0.750	0.47	0.09
966384	VC.192/40 S-p-5/16-18x1-INOX	1.57	5/16-18	1.06	0.83	1.000	0.47	0.09
966385	VC.192/40 S-p-5/16-18x1¼-INOX	1.57	5/16-18	1.06	0.83	1.250	0.47	0.09
966496	VC.192/50 S-p-3/8-16x1-INOX	1.97	3/8-16	1.3	0.98	1.000	0.55	0.16
966497	VC.192/50 S-p-3/8-16x1¼-INOX	1.97	3/8-16	1.3	0.98	1.250	0.55	0.16
966498	VC.192/50 S-p-3/8-16x1½-INOX	1.97	3/8-16	1.3	0.98	1.500	0.55	0.17
966499	VC.192/50 S-p-3/8-16x2-INOX	1.97	3/8-16	1.3	0.98	2.000	0.55	0.18



Clamping knobs