



# Power Schottky Rectifier with common cathode

$I_{FAV} = 2 \times 15 \text{ A}$   
 $V_{RRM} = 60 \text{ V}$   
 $V_F = 0.52 \text{ V}$

$V_{RSM}$	$V_{RRM}$	Type
V	V	
60	60	DSSK 28-006B



TO-220 AB  
(B-Type)



A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings		Features
$I_{FRMS}$		35	A	<ul style="list-style-type: none"> <li>• International standard package</li> <li>• Very low <math>V_F</math></li> <li>• Extremely low switching losses</li> <li>• Low <math>I_{RM}</math>-values</li> <li>• Epoxy meets UL 94V-0</li> </ul>
$I_{FAV}$	$T_C = 135^\circ\text{C}$ ; rectangular, $d = 0.5$	15	A	
$I_{FAV}$	$T_C = 135^\circ\text{C}$ ; rectangular, $d = 0.5$ ; per device	30	A	
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}$ ; $t_p = 10 \text{ ms}$ (50 Hz), sine	300	A	
$E_{AS}$	$I_{AS} = 10 \text{ A}$ ; $L = 100 \mu\text{H}$ ; $T_{VJ} = 25^\circ\text{C}$ ; non repetitive	5	mJ	
$I_{AR}$	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$ ; repetitive	1	A	
$(dv/dt)_{cr}$		1000	V/ $\mu\text{s}$	
$T_{VJ}$		-55...+150	$^\circ\text{C}$	
$T_{VJM}$		150	$^\circ\text{C}$	
$T_{stg}$		-55...+150	$^\circ\text{C}$	
$P_{tot}$	$T_C = 25^\circ\text{C}$	90	W	
$M_d$	mounting torque (Version B only)	0.4...0.6	Nm	
Weight	typical	2	g	

### Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

### Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Symbol	Conditions	Characteristic Values	
		typ.	max.
$I_R$ ①	$V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ\text{C}$	10	mA
	$V_R = V_{RRM}$ ; $T_{VJ} = 100^\circ\text{C}$	50	mA
$V_F$	$I_F = 15 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$	0.52	V
	$I_F = 15 \text{ A}$ ; $T_{VJ} = 25^\circ\text{C}$	0.56	V
	$I_F = 30 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$	0.69	V
$R_{thJC}$		1.4	K/W
$R_{thCH}$	0.5		K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0%  
Data according to IEC 60747 and per diode unless otherwise specified.

Dimensions see Outlines.pdf

**Recommended replacement:  
DSB30C60PB/DSB60C60PB**

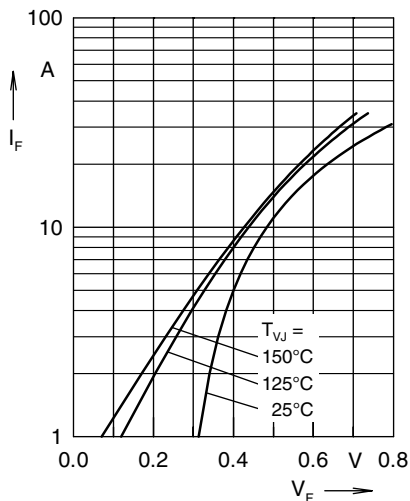


Fig. 1 Maximum forward voltage drop characteristics

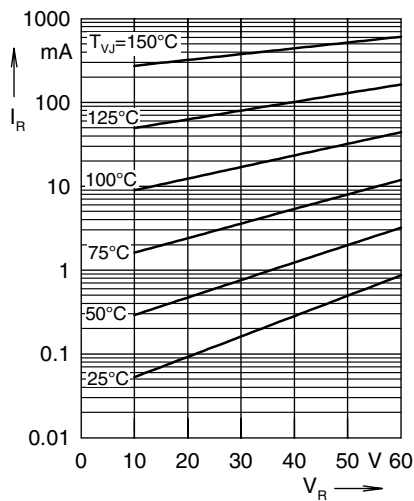


Fig. 2 Typ. value of reverse current  $I_R$  versus reverse voltage  $V_R$

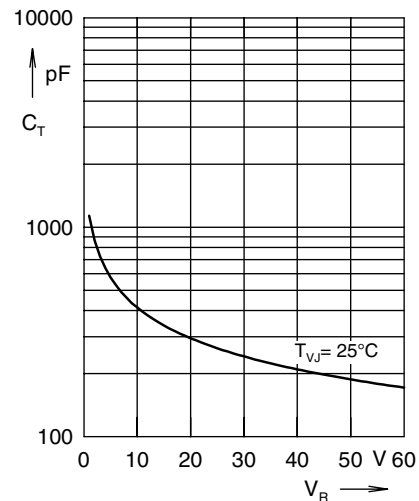


Fig. 3 Typ. junction capacitance  $C_T$  versus reverse voltage  $V_R$

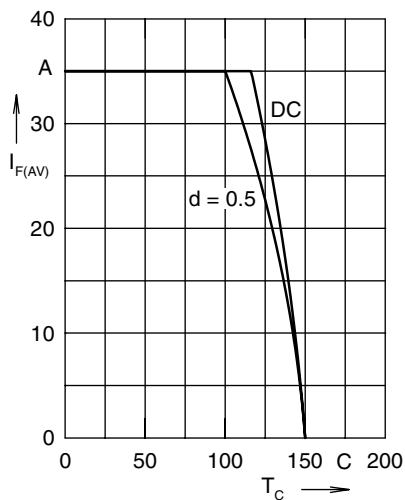


Fig. 4 Average forward current  $I_{F(AV)}$  versus case temperature  $T_C$

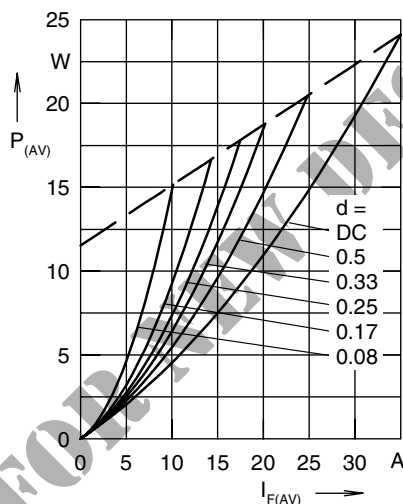


Fig. 5 Forward power loss characteristics

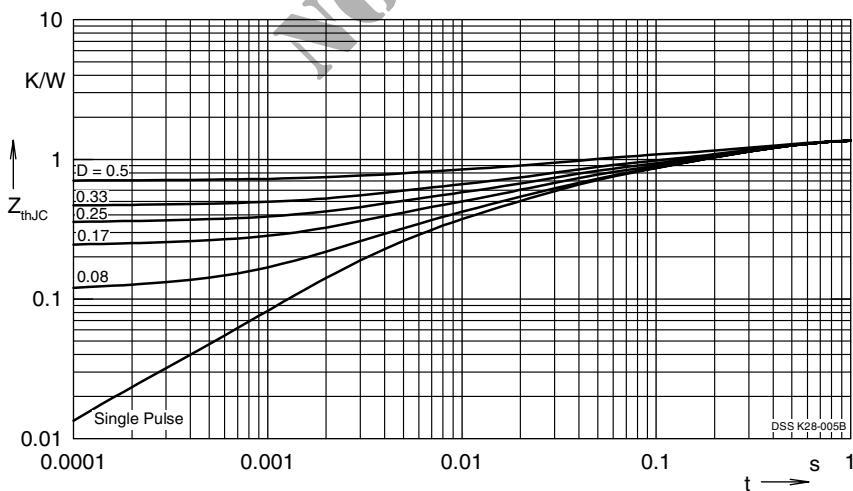


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode