

---

## Features:

- **Wideband:** 50 to 4000 MHz
- **Medium Output Power:** 20 dBm P1dB up to 2200 MHz
- **Excellent Linearity:** 40 dBm OIP3
- **Gain:** 18 dB up to 2700 MHz
- **Excellent Gain Flatness:** +/- 0.2 up to 3500 MHz
- **Single +5V Supply With On-Chip Active-Bias For Ease Of Operation**
- **Lead Free RoHS Compliant Surface-Mount SOT-89 Package**



## Applications:

- WiMax
- Wireless IPTV
- Cellular/PCS/3G Base Stations
- Microwave Radios
- CATV/Cable Modem
- Instrumentations
- Homeland Security
- General Purpose Gain Block

## Description:

The MHA-054020-89 is a broadband cascadable MMIC amplifier utilizing high-reliability InGaP/GaAs HBT technology. Packaged in low cost SOT-89 lead-free Green Package, the MMIC is ideally suited for driver amplifier or gain block in wireless applications such as Cellular, PCS, GSM and UMTS base stations as well as CATV, wireless IPTV, microwave radio, instrumentation, homeland security systems etc. It has excellent linearity and gain flatness over a broad frequency range. The third order intercept point performance is excellent, typically 19 dB above P-1dB below 500 MHz and 18 dB above P-1dB @ 900 MHz. It has on-chip bias circuit to provide bias stability and ease of use.



# MHA-054020-89

50 - 4000 MHz Cascadable InGaP HBT MMIC Amplifier  
 Preliminary Data Sheet  
 June 2008

## Electrical Specifications: @ $V_{cc}=+5.0V$ , $I_{cc}=100mA$ , $T_a=25\text{ }^\circ C$ $Z_0=50\text{ ohm}$ <sup>(1)</sup>

Parameter	Units	Typical
Frequency Range	MHz	50-4000
Gain	dB	18
		17
Gain Flatness	+/-dB	0.75
Input Return Loss	dB	18
		13
		12
Output Return Loss	dB	15
Output P-1dB	dBm	20
		18.5
		16.5
		15.0
Output IP3 @ 5 dBm/tone, 1 MHz separation < 2 GHz @ 0 dBm/tone, 1 MHz separation > 2 GHz	dBm	40
		38
		32
		29
		26
		26
Noise Figure	dB	4.5
Operating Bias Conditions: $V_{cc}$	V	+ 5
	$I_{cc}$	mA







(1) All Data is measured on Evaluation PCB optimized for wideband (50-4000 MHz) performance referenced to RF connectors

## Absolute Maximum Ratings:

SYMBOL	PARAMETERS	UNITS	ABSOLUTE MAXIMUM
$V_{cc}$	Collector Voltage	V	6
$I_{cc}$	Collector Current	mA	125
$P_{diss}$	DC Power Dissipation	W	TBD
$P_{in\ max}$	RF Input Power	dBm	TBD
$T_{oper}$	Operating Case/Lead Temperature Range	$^\circ C$	- 40 to + 85
$T_{ch}$	Channel Temperature	$^\circ C$	150
$T_{stg}$	Storage Temperature	$^\circ C$	-60 to +150

\*Operation of this device above any one of these parameters may cause permanent damage.

**Typical RF Performance:**  $V_{cc}=5V$ ,  $I_{cc}=100mA$ ,  $T_a=25\text{ }^\circ C$   $Z_0 = 50\text{ Ohm}$  system on Evaluation PCB

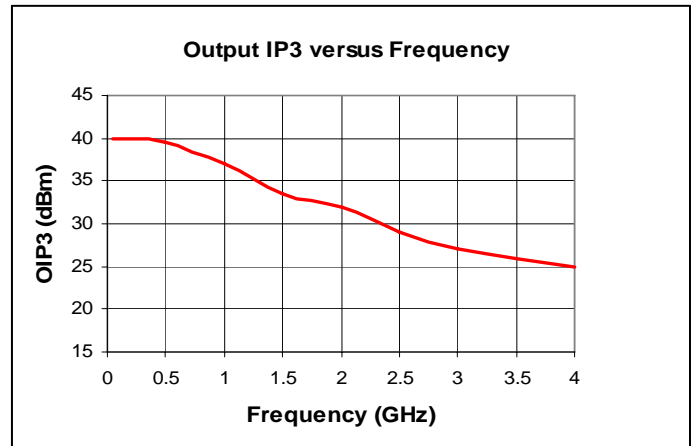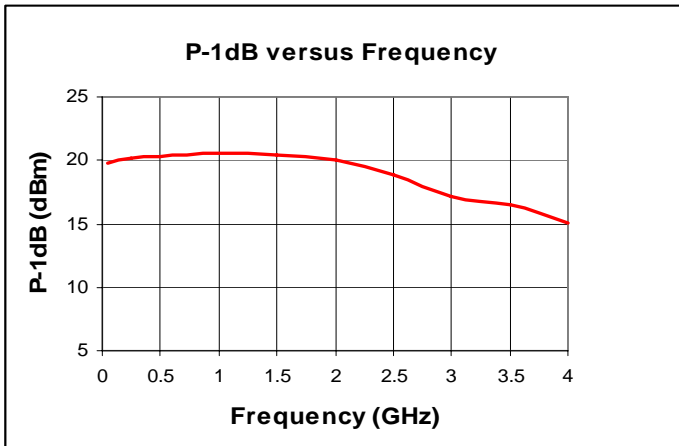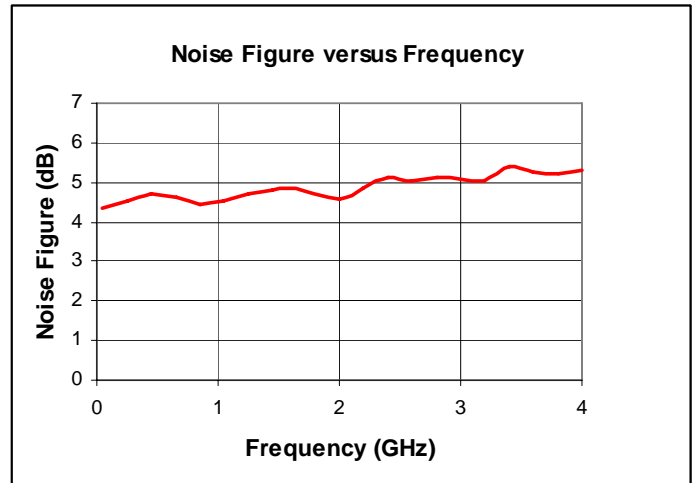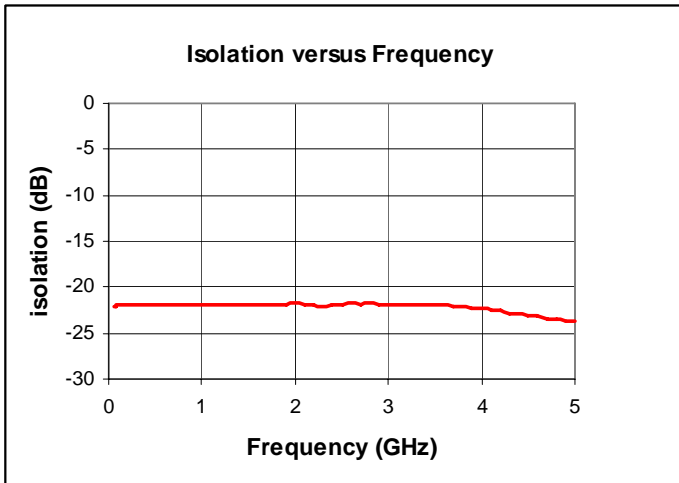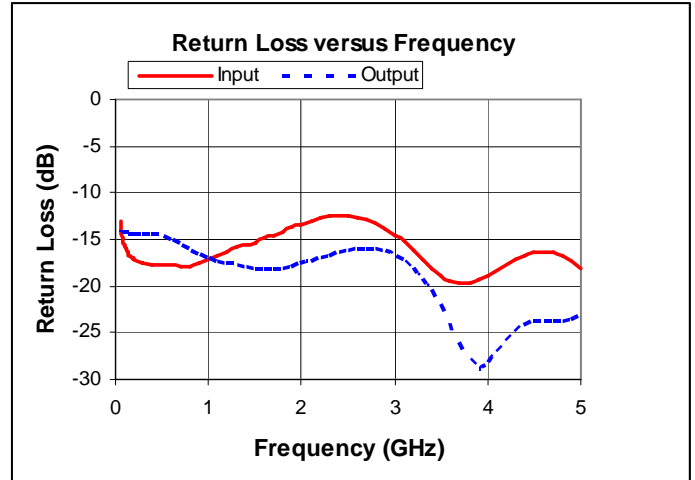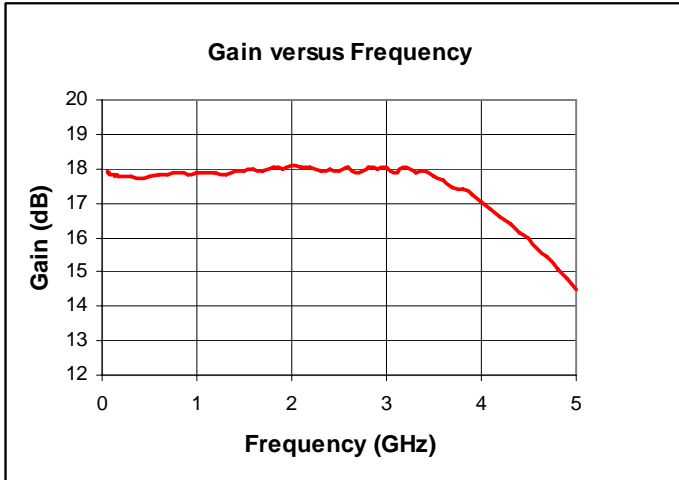

## Mechanical Information:

This Package is RoHS-compliant lead free Green Package: SOT-89

Pin1: RF input, Needs DC blocking capacitor

Pin2/Pin4: RF/DC Ground, Must be Grounded Properly for Best Performance

Pin3: RF Output/ DC Bias Input, External DC blocking Capacitor required

