


XSAV12373EX

Inductive proximity sensors XS ATEX D,
rotation monitoring hazard area, M30,
Sn10mm, 120...3000c/mn, NC, cable 2 m

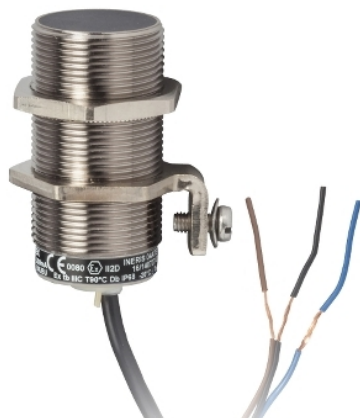

Main

| | |
|------------------------------------|---|
| Range of Product | Telemecanique Inductive proximity sensors XS |
| Series name | Application |
| Sensor Type | Inductive proximity sensor |
| Device Application | Rotation monitoring ATEX dust |
| Sensor name | XSA |
| Sensor design | Cylindrical M30 |
| Size | 30 mm |
| Body type | Fixed |
| Detector flush mounting acceptance | Flush mountable |
| Material | Metal |
| Enclosure Material | Nickel Plated Brass |
| [Sn] nominal sensing distance | 0.39 in (10 mm) |
| Type of output signal | Discrete |
| Wiring Technique | 3-wire |
| Discrete output function | 1 NC |
| Output circuit type | DC |
| Discrete output type | PNP |
| Electrical connection | Cable |
| Cable length | 6.56 ft (2 m) |
| [Us] rated supply voltage | 12...48 V DC reverse polarity protection |
| Switching capacity in mA | <= 200 mA overload and short-circuit protection |
| IP degree of protection | IP67 conforming to IEC 60529 |

Complementary

| | |
|----------------------------|--------------------------------|
| Thread type | M30 x 1.5 |
| Detection face | Frontal |
| Front material | PPS |
| Sensing range | > 0.31...0.59 in (> 8...15 mm) |
| Adjustable frequency range | 120...3000 cyc/mn |
| Operating zone | 0.00...0.31 in (0...8 mm) |
| Differential travel | 3...15% of Fr |
| Repeat accuracy | 3% of Sr |
| Cable composition | 3 x 0.34 mm ² |
| Wire insulation material | PvR |
| Status LED | Output state 1 LED red) |
| Supply voltage limits | 10...58 V DC |
| Switching frequency | <= 800 Hz |
| Maximum voltage drop | <1.8 V closed state) |
| Current consumption | 0...15 mA no-load |
| Run-up delay at power-up | 9 s standard |
| Marking | II2 D-Ex tb IIIC T90°C Db IP67 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|-----------------|-----------------|
| Threaded length | 2.24 in (57 mm) |
| Length | 3.19 in (81 mm) |

Environment

| | |
|---------------------------------------|--|
| Environmental characteristic | Hazardous location |
| Standards | EN/IEC 60079-31 EN/IEC 60079-0 |
| Directives | 2014/34/EU - ATEX directive |
| Product Certifications | IEC-Ex INE 17.0006 INERIS 04ATEX0022X |
| Ambient Air Temperature for Operation | -4...140 °F (-20...60 °C) |
| Dust zone | Zone 21 - 22 |

Ordering and shipping details

| | |
|-----------------------|--------------------------|
| Category | 22486-SENSORS, PROXIMITY |
| Discount Schedule | DS2 |
| GTIN | 3389110955521 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 8.85 oz (251.0 g) |
| Returnability | No |
| Country of origin | FR |

Packing Units

| | |
|------------------------------|-----------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 1.38 in (3.5 cm) |
| Package 1 width | 4.41 in (11.2 cm) |
| Package 1 Length | 6.50 in (16.5 cm) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 10 |
| Package 2 Weight | 6.13 lb(US) (2.78 kg) |
| Package 2 Height | 5.91 in (15 cm) |
| Package 2 width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |

Contractual warranty


| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

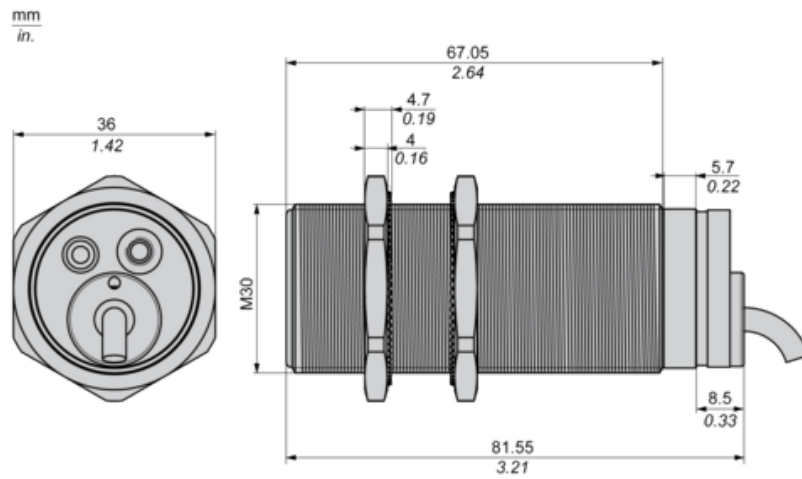


Minimum Mounting Distances

Side by side

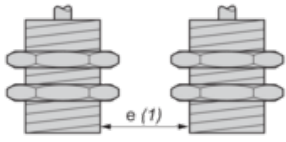


$e (1) \geq 20 \text{ mm}/0.79 \text{ in}$

Face to face



$e (2) \geq 120 \text{ mm}/4.72 \text{ in}$


Facing a metal object

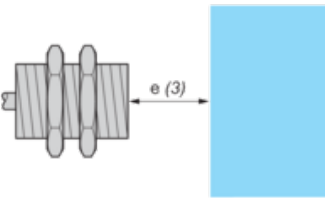

$e (3) \geq 30 \text{ mm}/1.18 \text{ in}$.

Wiring Schemes


3-wire DC



BU : Blue
BN : Brown
BK : Black

Performance Curves

Standard Steel Target : 30x30x1 mm

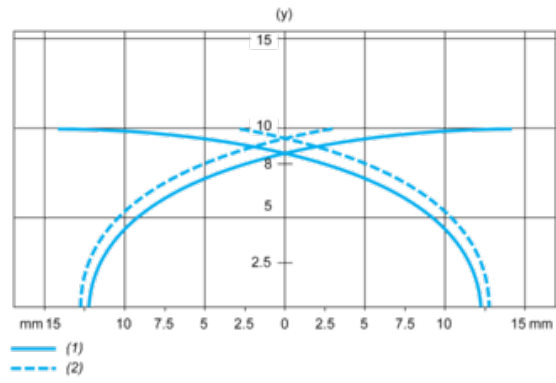

- (1) Pick-up points
- (2) Drop-out points (object approaching from the side)
- (y) Sensing distance in mm