

2N6211
2N6212
2N6213

**SILICON
PNP POWER TRANSISTORS**



TO-66 CASE



www.centralemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N6211, 2N6212, and 2N6213 are silicon PNP transistors designed for high speed switching and high voltage amplifier applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Peak Collector Current
Continuous Base Current
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL	2N6211	2N6212	2N6213	UNITS
V_{CBO}	275	350	400	V
V_{CEO}	225	300	350	V
V_{EBO}		6.0		V
I_C		2.0		A
I_{CM}		5.0		A
I_B		1.0		A
P_D		35		W
T_J, T_{stg}		-65 to +200		$^\circ\text{C}$
θ_{JC}		5.0		$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N6211		2N6212		2N6213		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
I_{CEV}	$V_{CE}=250\text{V}, V_{BE}=1.5\text{V}$	-	0.5	-	-	-	-	mA
I_{CEV}	$V_{CE}=315\text{V}, V_{BE}=1.5\text{V}$	-	-	-	0.5	-	-	mA
I_{CEV}	$V_{CE}=360\text{V}, V_{BE}=1.5\text{V}$	-	-	-	-	-	0.5	mA
I_{CEV}	$V_{CE}=250\text{V}, V_{BE}=1.5\text{V}, T_C=100^\circ\text{C}$	-	5.0	-	-	-	-	mA
I_{CEV}	$V_{CE}=315\text{V}, V_{BE}=1.5\text{V}, T_C=100^\circ\text{C}$	-	-	-	5.0	-	-	mA
I_{CEV}	$V_{CE}=360\text{V}, V_{BE}=1.5\text{V}, T_C=100^\circ\text{C}$	-	-	-	-	-	5.0	mA
I_{CEO}	$V_{CE}=150\text{V}$	-	5.0	-	5.0	-	5.0	mA
I_{EBO}	$V_{EB}=6.0\text{V}$	-	1.0	-	0.5	-	0.5	mA
BV_{CEV}	$I_C=50\text{mA}, V_{BE}=1.5\text{V}, L=10\text{mH}$	275	-	350	-	400	-	V
BV_{CER}	$I_C=50\text{mA}, R_{BE}=50\Omega$	250	-	325	-	375	-	V
BV_{CEO}	$I_C=50\text{mA}$	225	-	300	-	350	-	V
BV_{EBO}	$I_E=1.0\text{mA}$	6.0	-	-	-	-	-	V
BV_{EBO}	$I_E=0.5\text{mA}$	-	-	6.0	-	6.0	-	V
$V_{CE(SAT)}$	$I_C=1.0\text{A}, I_B=125\text{mA}$	-	1.4	-	1.6	-	2.0	V
$V_{BE(SAT)}$	$I_C=1.0\text{A}, I_B=125\text{mA}$	-	1.4	-	1.4	-	1.4	V
h_{FE}	$V_{CE}=2.8\text{V}, I_C=1.0\text{A}$	10	100	-	-	-	-	
h_{FE}	$V_{CE}=3.2\text{V}, I_C=1.0\text{A}$	-	-	10	100	-	-	
h_{FE}	$V_{CE}=4.0\text{V}, I_C=1.0\text{A}$	-	-	-	-	10	100	

R3 (11-November 2015)

2N6211
2N6212
2N6213

SILICON
PNP POWER TRANSISTORS




ELECTRICAL CHARACTERISTICS - Continued: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
f_T	$V_{CE}=10\text{V}$, $I_C=200\text{mA}$, $f=5.0\text{MHz}$	20		MHz
C_{ob}	$V_{CB}=10\text{V}$, $I_E=0$, $f=1.0\text{MHz}$		220	pF
t_r	$V_{CC}=200\text{V}$, $I_C=1.0\text{A}$, $I_{B1}=I_{B2}=125\text{mA}$		0.6	μs
t_s	$V_{CC}=200\text{V}$, $I_C=1.0\text{A}$, $I_{B1}=I_{B2}=100\text{mA}$		2.5	μs
t_f	$V_{CC}=200\text{V}$, $I_C=1.0\text{A}$, $I_{B1}=I_{B2}=125\text{mA}$		0.6	μs
$I_{S/b}^*$	$V_{CE}=40\text{V}$	875		mA

*Pulsed: 1.0s non-repetitive pulse.

TO-66 CASE - MECHANICAL OUTLINE

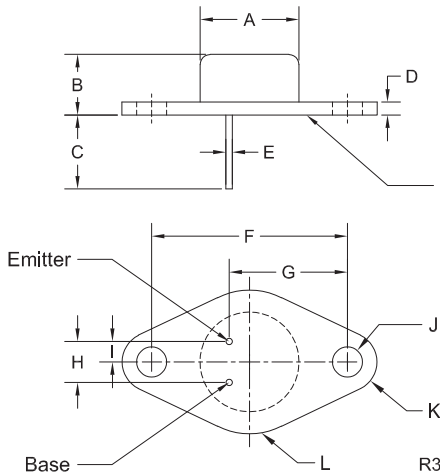

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.470	0.500	11.94	12.70
B	0.250	0.340	6.35	8.64
C	0.360	-	9.14	-
D	0.050	0.075	1.27	1.91
E (DIA)	0.028	0.034	0.71	0.86
F	0.956	0.964	24.28	24.48
G	0.570	0.590	14.48	14.99
H	0.190	0.210	4.83	5.33
I	0.093	0.107	2.36	2.72
J (DIA)	0.142	0.152	3.61	3.86
K (RAD)	0.141		3.58	
L (RAD)	0.345		8.76	

TO-66 (REV:R3)

MARKING:
FULL PART NUMBER

R3 (11-November 2015)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms



http://www.centrasemi.com

Product End of Life Notification

PDN ID:	PDN01197
Notification Date:	11/11/21
Last Buy Date:	5/11/22
Last Shipment Date	11/11/22

Summary: The following power transistors are discontinued and now classified as of End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

*** All Plating types (PBFREE,TIN/LEAD) for each item listed are included in this notice.**

<u>Central Part Number</u>	<u>Suggested Replacement</u>
CEN1041 MOD	N/A
CEN1181	N/A
2N6211	N/A
2N6212	N/A
2N6213	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. If you would like assistance, please visit <https://my.centrasemi.com/submit-inquiry?type=ER> to submit an online inquiry.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.