


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR
 BOOT: FLEXIBLE PVC. AVAILABLE IN TEN COLORS
 CONTACT: STEEL
2. P/N: 9260COLOR
 HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 FRAME: NICKEL PLATED BRASS.
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-600/COLOR
 18AWG TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
4. PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
 HANDS FREE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

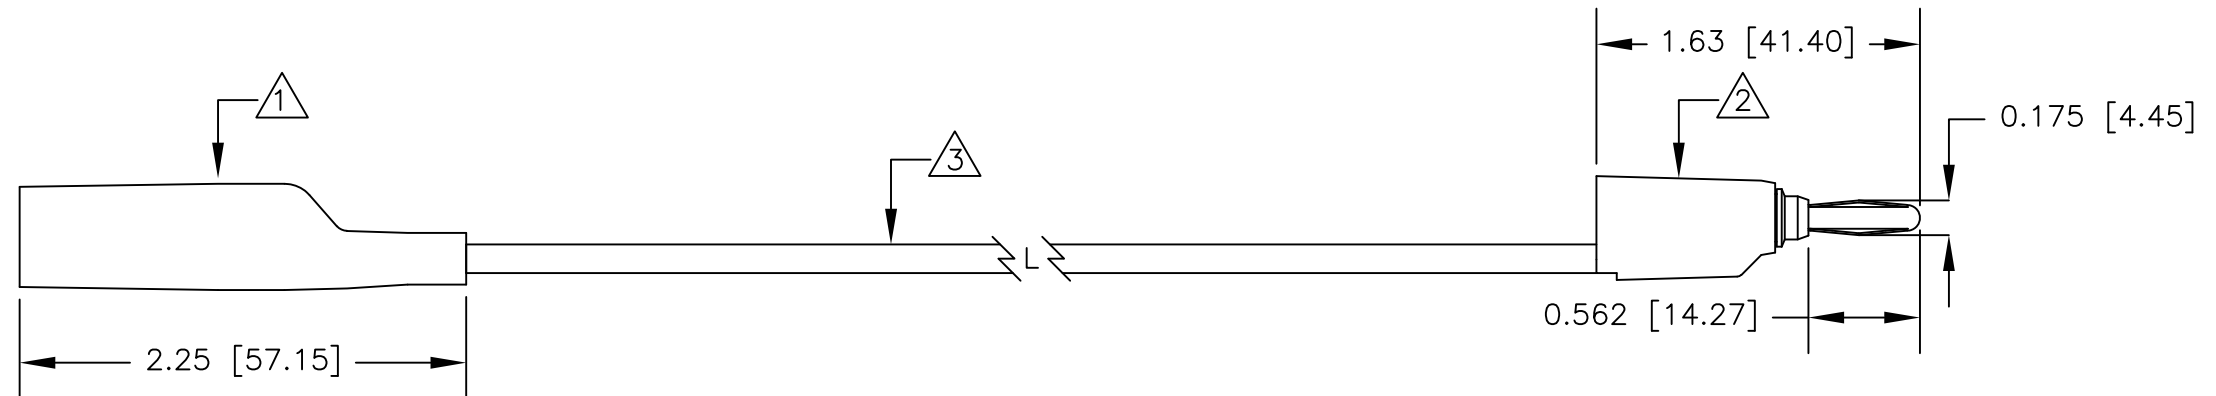

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	5/13	
			APPROVED BY			
		FINISH SEE NOTE.			DESCRIPTION	
					STD ALLIGATOR CLIP (9274) TO STK BAN PLUG (9260)	
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			B	08505	681	
APPLICATION		DO NOT SCALE DRAWING	SCALE		1:1	SHEET 1 OF 1