



Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 1.5 mm<sup>2</sup>, Width: 4.1 mm, Colour: Green-yellow

### Business data

Article number	<u>3203.2</u>
Article name	FSL 1,5/2A GNYE
GTIN (EAN)	4044211110109
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	7.6 g
Weight per piece (including packaging)	8.1 g
Unit of weight	G
Customs number	85369010
Country of origin	BG
Product description	Protective earth terminal
Colour	Green-yellow

### Technical data

#### Dimensions

Length	48.5 mm
Width	4.1 mm
Height	42.3 mm
Height TS 35/7.5	43 mm

#### Ratings

Rated cross-section	1.5 mm <sup>2</sup>
Overvoltage category	III
Contamination degree	3

#### Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	1.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	1.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	1.5 mm <sup>2</sup>
Wire cross-section AWG, min.	24
Wire cross-section AWG, max.	16
Stripping length	12 mm

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

---

### Technical data

---

#### Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A1
Number of cross-connection channels	2
End plate required	✓

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-06-10
REACH Candidate Substance Note	No
RoHS Conform	yes

### Approvals

#### Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

#### CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	yes
----------------------	-----

CSA wire cross-section AWG, min.	24
----------------------------------	----

CSA wire cross-section AWG, max.	16
----------------------------------	----

CSA stripping length	12 mm
----------------------	-------

#### CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	yes
------------------------	-----

CSAus wire cross-section AWG, min.	24
------------------------------------	----

CSAus wire cross-section AWG, max.	16
------------------------------------	----

CSAus stripping length	12 mm
------------------------	-------

#### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2:2009
--------------------	-------------------

KEMA KEUR approval granted	yes
----------------------------	-----

KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
---	---------------------

KEMA wire cross-section single-core (rigid), max.	1.5 mm <sup>2</sup>
---	---------------------


KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
--	---------------------

KEMA wire cross-section stranded, max.	1.5 mm <sup>2</sup>
--	---------------------

### Media



EAC

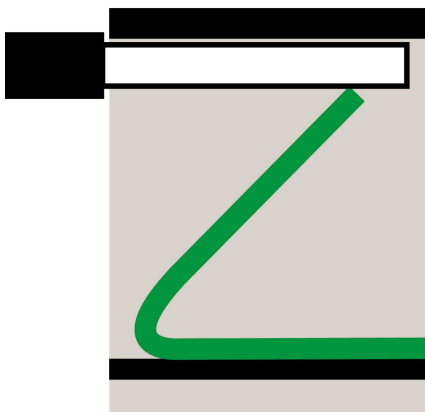

### Accessories

#### End plate



End plate, Width: 1.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3400.2</u>	FAP 1,5-4/2A BG	4044211110208	20

#### End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3811.2</u>	ZES 35/2 BG	4044211080600	50

#### Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 4 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4820.7</u>	PMC SB 4/50 WH	4044211112127	500 ST

#### Screwdriver



Screwdriver with bare blade, Colour:

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3164.0</u>	SDB 0,4x2,0	4044211107246	1 ST

#### Four-way cover

## 3203.2 FSL 1,5/2A GNYE

Cover, Length: 3.4 mm, Width: 15.7 mm, Colour: Yellow



Article number	Article name	GTIN (EAN)	Packaging unit
<u>3425.8</u>	FAD 1,5/4/B YE	4044211132910	20 ST