


A


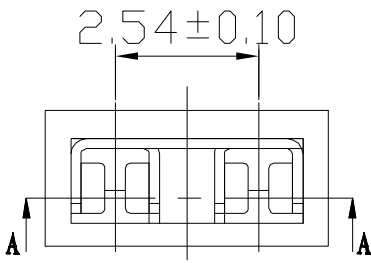


B

NOTES:

- 1. Insulation: 30% Glass Filled PBT, UL94V-0
- ② 2. Contact : Brass
- 3. Current Rating: 3A Max
- 4. Dielectric Voltage: 1000V rms / 1 minute
- 5. Insulation Resistance: 1000M ohm Min.
- 6. Contact Resistance: 30m ohm Max.
- 7. Operating and Storage Temperature: -40°C ~ +105°C
- ④ 8. Mating Cycles: 10 Min.

C

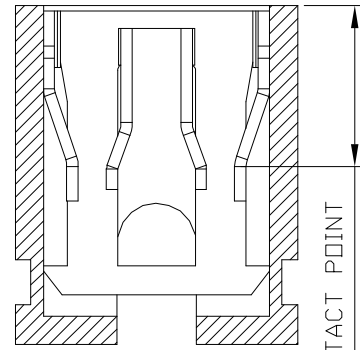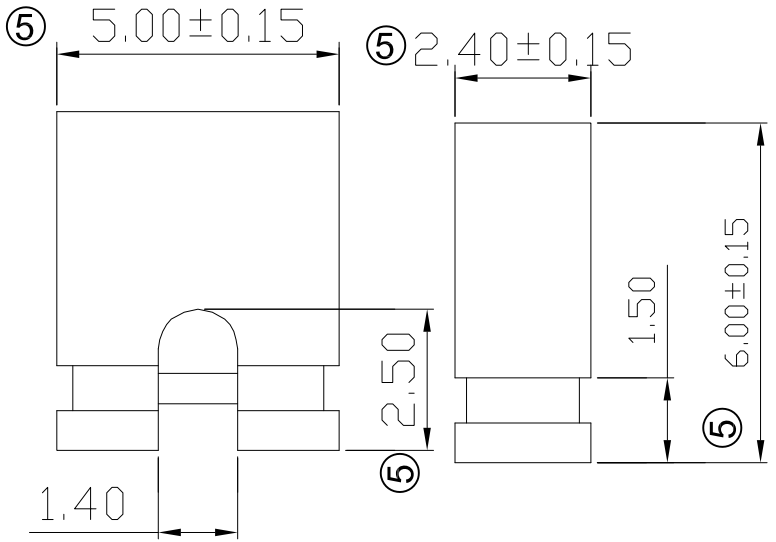

A-A Section

AKSPT/x - x

Color:
 GREY - Grey
 RED - Red
 BLUE - Blue
 BLACK - Black

Contact Area Plating: ④
 G: Gold Flash

D

E

F

RoHS compliant
 Unit:mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE		⑤	Change the plant	20.04.2022	Winnie	Drawn	29.10.1995	ASSMANN WSW-No. AKSPT/x-x
.X	±0.38	④	Update	07.06.2013	Winnie	Approved	20.04.2022	
.XX	±0.25	③	Update the material of contact	15.10.2012	Amy			
⑤ .XXX	±0.15	②	Update	27.07.2009	Rale		Drawing-No. ASS 0336 CO	rev05
DIM	TOL	①	Drawn	29.10.1995	Hellwig			
X.°	±1°	Id.	Modification	Date	Name		Replace	SHEET
Angle	TOL							
UNIT	mm							

H

A

B

C

D

E

F

G

H