

EMG 22-DIO 4E-1N5408

Order No.: 2952790


The illustration shows version EMG 22-DIO 4E

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2952790>

Diode module, with 4 diodes, individually wired, diode type 1N 5408



Commercial data

| | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 084486 |
| sales group | H100 |
| Pack | 10 pcs. |
| Customs tariff | 85411000 |
| Catalog page information | Page 664 (IF-2009) |

Product notes

WEEE/RoHS-compliant since:
04/19/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------------------------------|------------|
| Diode type | 1 N 5408 |
| Max. operating voltage | 250 V AC |
| Peak reverse voltage per diode | 1000 V |
| Reverse current per diode | 10 μ A |

| | |
|---|---|
| Conducting state voltage per diode | Approx. 0.8 V |
| Conducting state current per diode | 1.5 A (with single load) 1 A (with simultaneous loads) |
| Width | 22.5 mm |
| Height | 75 mm |
| Depth | 55 mm |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Surge voltage category | III, basic insulation (as per EN 50178) |
| Mounting position | Any |
| Assembly instructions | In rows with zero spacing |

Connection data

| | |
|--|---------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Type of connection | Screw connection |

Certificates / Approvals




Certification GOST

Accessories

| Item | Designation | Description |
|----------------|-------------|-------------------------------|
| Marking | | |
| 2947035 | EMG-GKS 12 | Equipment marker, width 12 mm |

Diagrams/Drawings

Circuit diagram

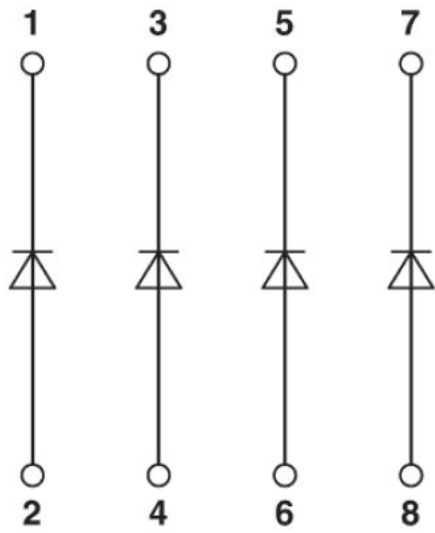

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;