

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE	WIRE RANGE		COLOR	MAX. WIRE INSUL. DIA.	DIMENSIONS in. [mm]			WIRE STRIP LENGTH
		ENGLISH	METRIC			L ± .03 [0,8]	W ± .01 [0,3]	H ± .02 [0,5]	
DNF18-250FIB	.250 X .032 [8,3 X 0,8]	22-18	0,5-1,0	RED	.14 [3,6]	.84 [21,3]	.35 [8,9]	.22 [5,6]	9/32 ^{+1/32} [7,1 ^{+0,8} ₋₀]
DNF18-205FIB	.205/.187 X .032 [5,2/4,8 X 0,8]					.78 [19,8]	.31 [7,9]	.22 [5,6]	
DNF18-206FIB	.205/.187 X .020 [5,2/4,8 X 0,5]					.78 [19,8]	.31 [7,9]	.22 [5,6]	
DNF18-187FIB	.187 X .032 [4,8 X 0,8]					.78 [19,8]	.29 [7,4]	.16 [4,1]	
DNF18-188FIB	.187 X .020 [4,8 X 0,5]					.78 [19,8]	.29 [7,4]	.16 [4,1]	
DNF14-250FIB	.250 X .032 [8,3 X 0,8]	16-14	1,5-2,5	BLUE	.16 [4,1]	.84 [21,3]	.35 [8,9]	.22 [5,6]	
DNF14-205FIB	.205/.187 X .032 [5,2/4,8 X 0,8]					.78 [19,8]	.31 [7,9]	.22 [5,6]	
DNF14-206FIB	.205/.187 X .020 [5,2/4,8 X 0,5]					.78 [19,8]	.31 [7,9]	.22 [5,6]	
DNF14-187FIB	.187 X .032 [4,8 X 0,8]					.78 [19,8]	.29 [7,4]	.18 [4,6]	
DNF14-188FIB	.187 X .020 [4,8 X 0,5]					.78 [19,8]	.29 [7,4]	.18 [4,6]	
DNF10-250FIB	.250 X .032 [8,3 X 0,8]	12-10	4,0-6,0	YELLOW	.22 [6,0]	.96 [24,4]	.35 [8,9]	.23 [5,8]	3/8 ^{+1/32} [9,5 ^{+0,8} ₋₀]




LISTED
587H
E78522



CERTIFIED
LR31212

NOTES:

- USED FOR:
 - STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE (CSA)
 - 257°F [125°C] MAX. OPERATING TEMPERATURE (UL)
 - 600V. MAX. VOLTAGE RATING
- MATERIAL:
 - STAMPING: CDA 260 BRASS, TIN PLATED
 - HOUSING: TYPE 66 NYLON
- INSTALLATION TOOLS:
 - UL LISTED AND CSA CERTIFIED: CT-1525, CT-2500 (CT-2520CH)
 - PANDUIT APPROVED: CT-100A, CT-160, CT-260, CT-600A (CT-520CH)
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- COLORS ARE TRANSLUCENT.
- DNF10-250FIB IS UL APPROVED FOR USE WITH THE FOLLOWING WIRE COMBINATIONS: (2) #14, (2) #16, (2) #18 TWIST WIRES TOGETHER BEFORE CRIMPING
- INITIAL INSERTION/WITHDRAW FORCE: 6-12 Lb [27-32 N]

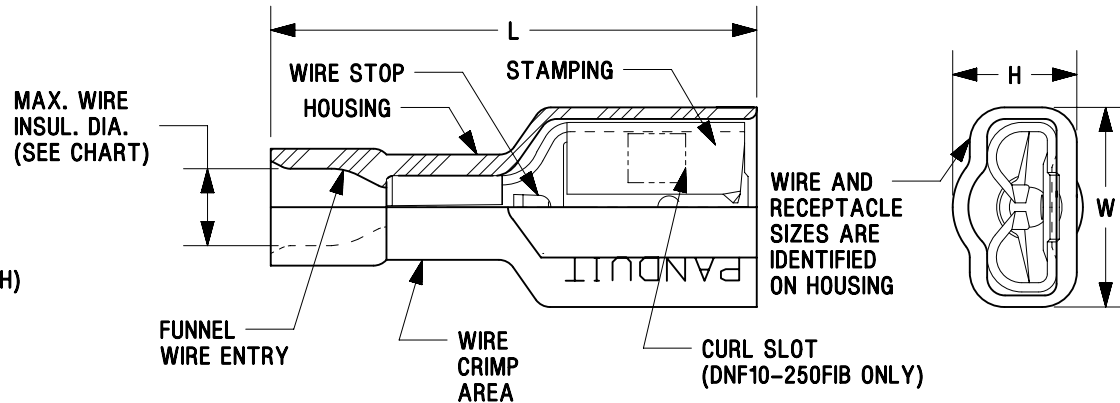

TITLE	
FEMALE DISCONNECTS, NYLON FULLY INSULATED, FUNNEL ENTRY	
CUSTOMER DRAWING	
ITEM REVISION NAME	N10923BA/20
DATASET FILE NAME	N10923BA_DC/20A
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
.x ± .1 [2.54]	.xxx ± .005 [0.127]
.xx ± .01 [0.25]	ANGLES ± 5°
THIRD ANGLE PROJECTION	
DRAWN BY	DATE
WJB	01.06.99
CHK	SCALE
-	N.T.S.
MATERIAL:	
SEE NOTES	
DRAWING NUMBER:	
A41196	
DRAWN BY	DATE
WJB	01.06.99
CHK	SCALE
-	N.T.S.
SHEET 1 OF 1	
A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
20	10/17/2019	HPR	CLN	JADE	Tab Sizes corrected for - DNF14-250FIB, DNF14-205FIB, DNF14-206FIB	053133
19	05-22-19	HPR	DC	JADE	Tab sizes added for - DNF18-206FIB, DNF18-188FIB, DNF14-250FIB, DNF14-206FIB, DNF14-187FIB	046833
18	3-19-19	JEH	SKB	JADE	WAS: (A) DNF18-205FIB	045190
17	10.19.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. UPDATED DRAWING TO CURRENT STANDARDS.	A41196