



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC		DIST		ZONE		LTR		REVISIONS		DATE	APPD
G		86						K	REV PER 0G3A-0588-00	12SEP00	JR/MS

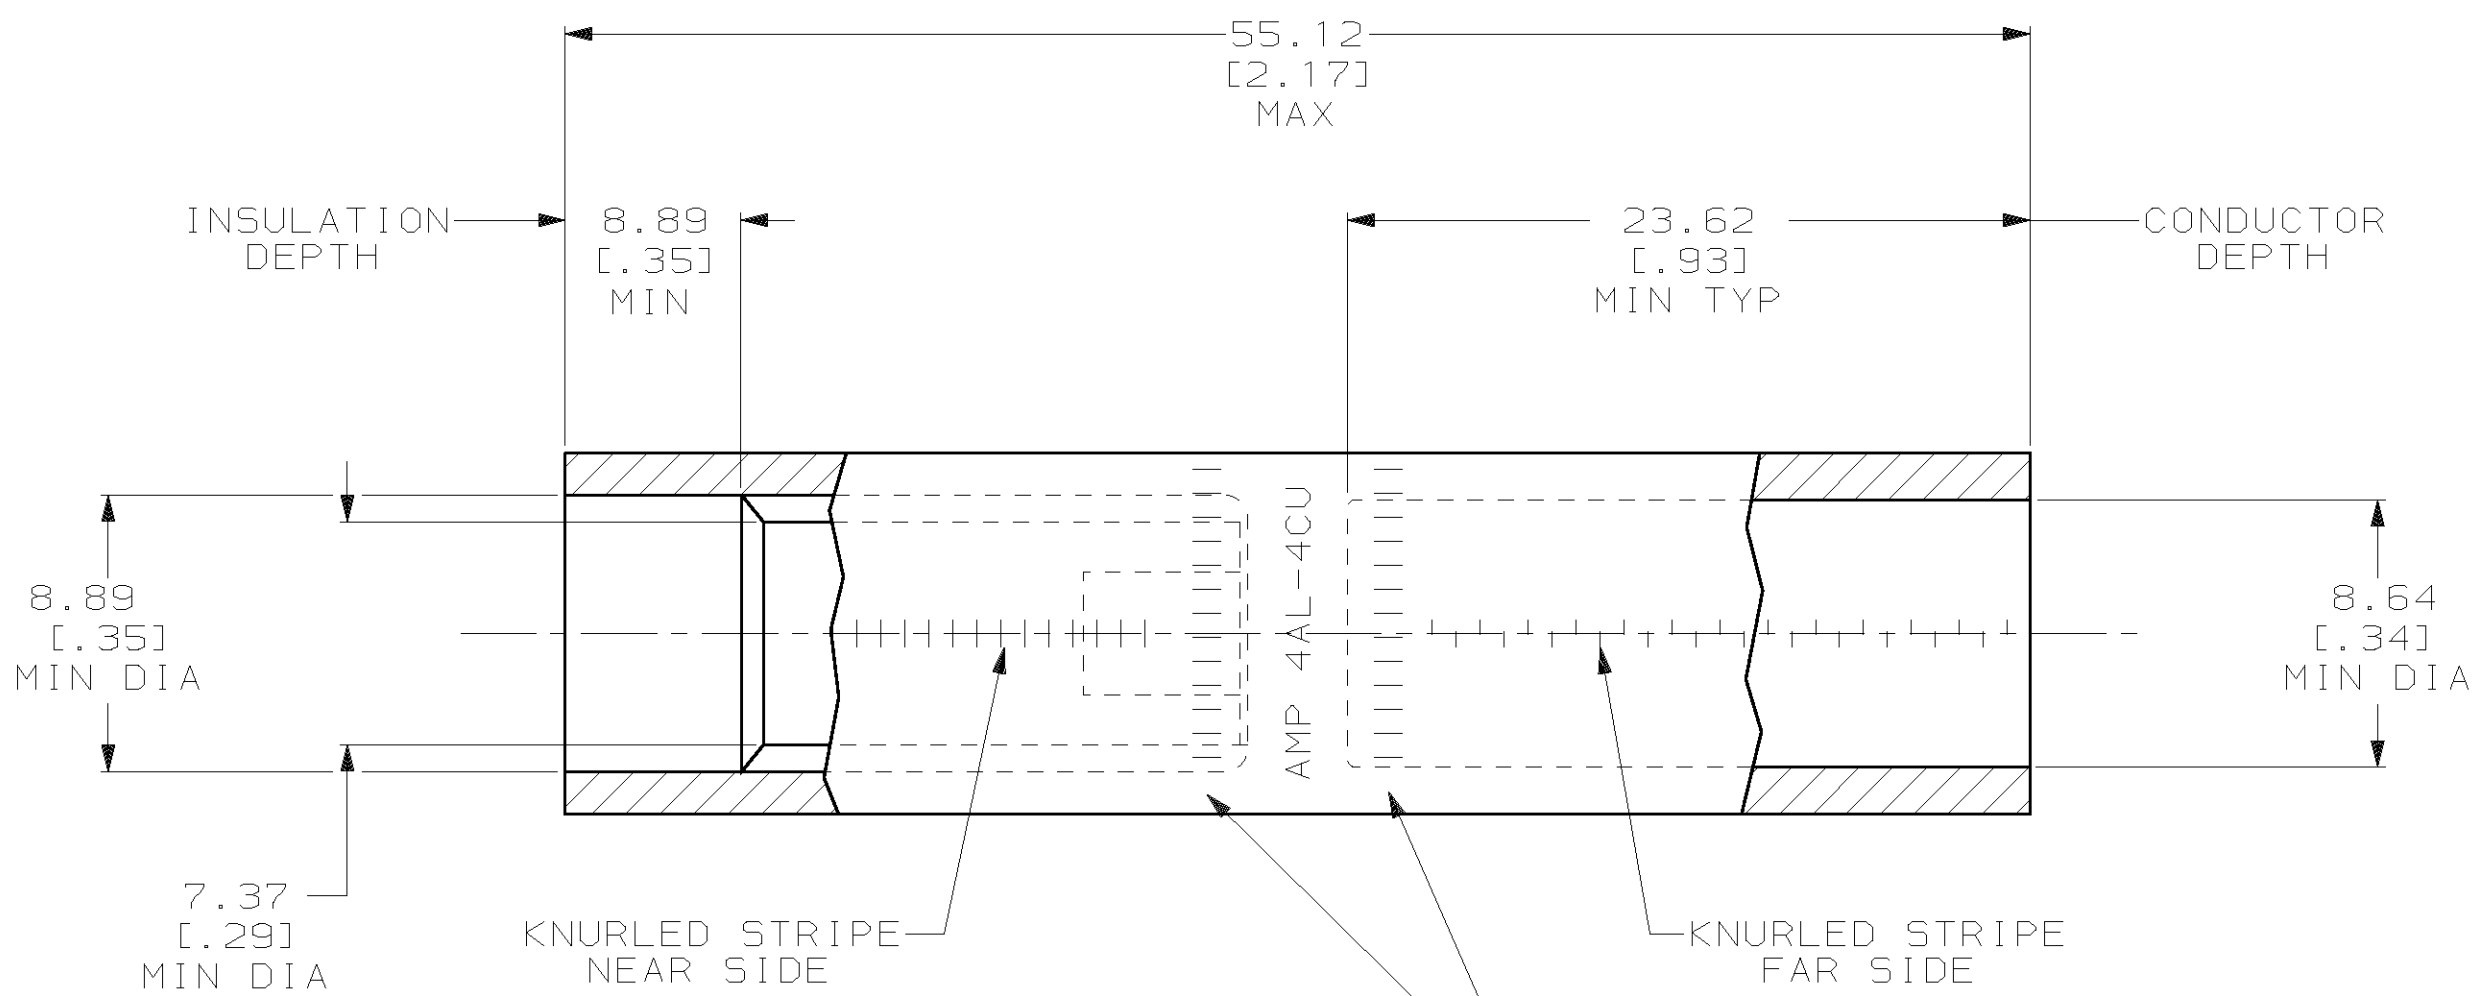

- 1 WIRE INSULATION:
 END 'A' 7.01 [.276] - 7.75 [.305] DIA FOR 4 AL
 END 'B' 7.01 [.276] - 7.75 [.305] DIA FOR 4 CU
- 2 CIRCUMFERENTIAL KNURLS HAVE BLANK AREAS POSITIONED 90° FROM STRAIGHT KNURLED STRIPES DESIGNATING NEW COPPER SPLICE BODY ALLOY ASTM B-301

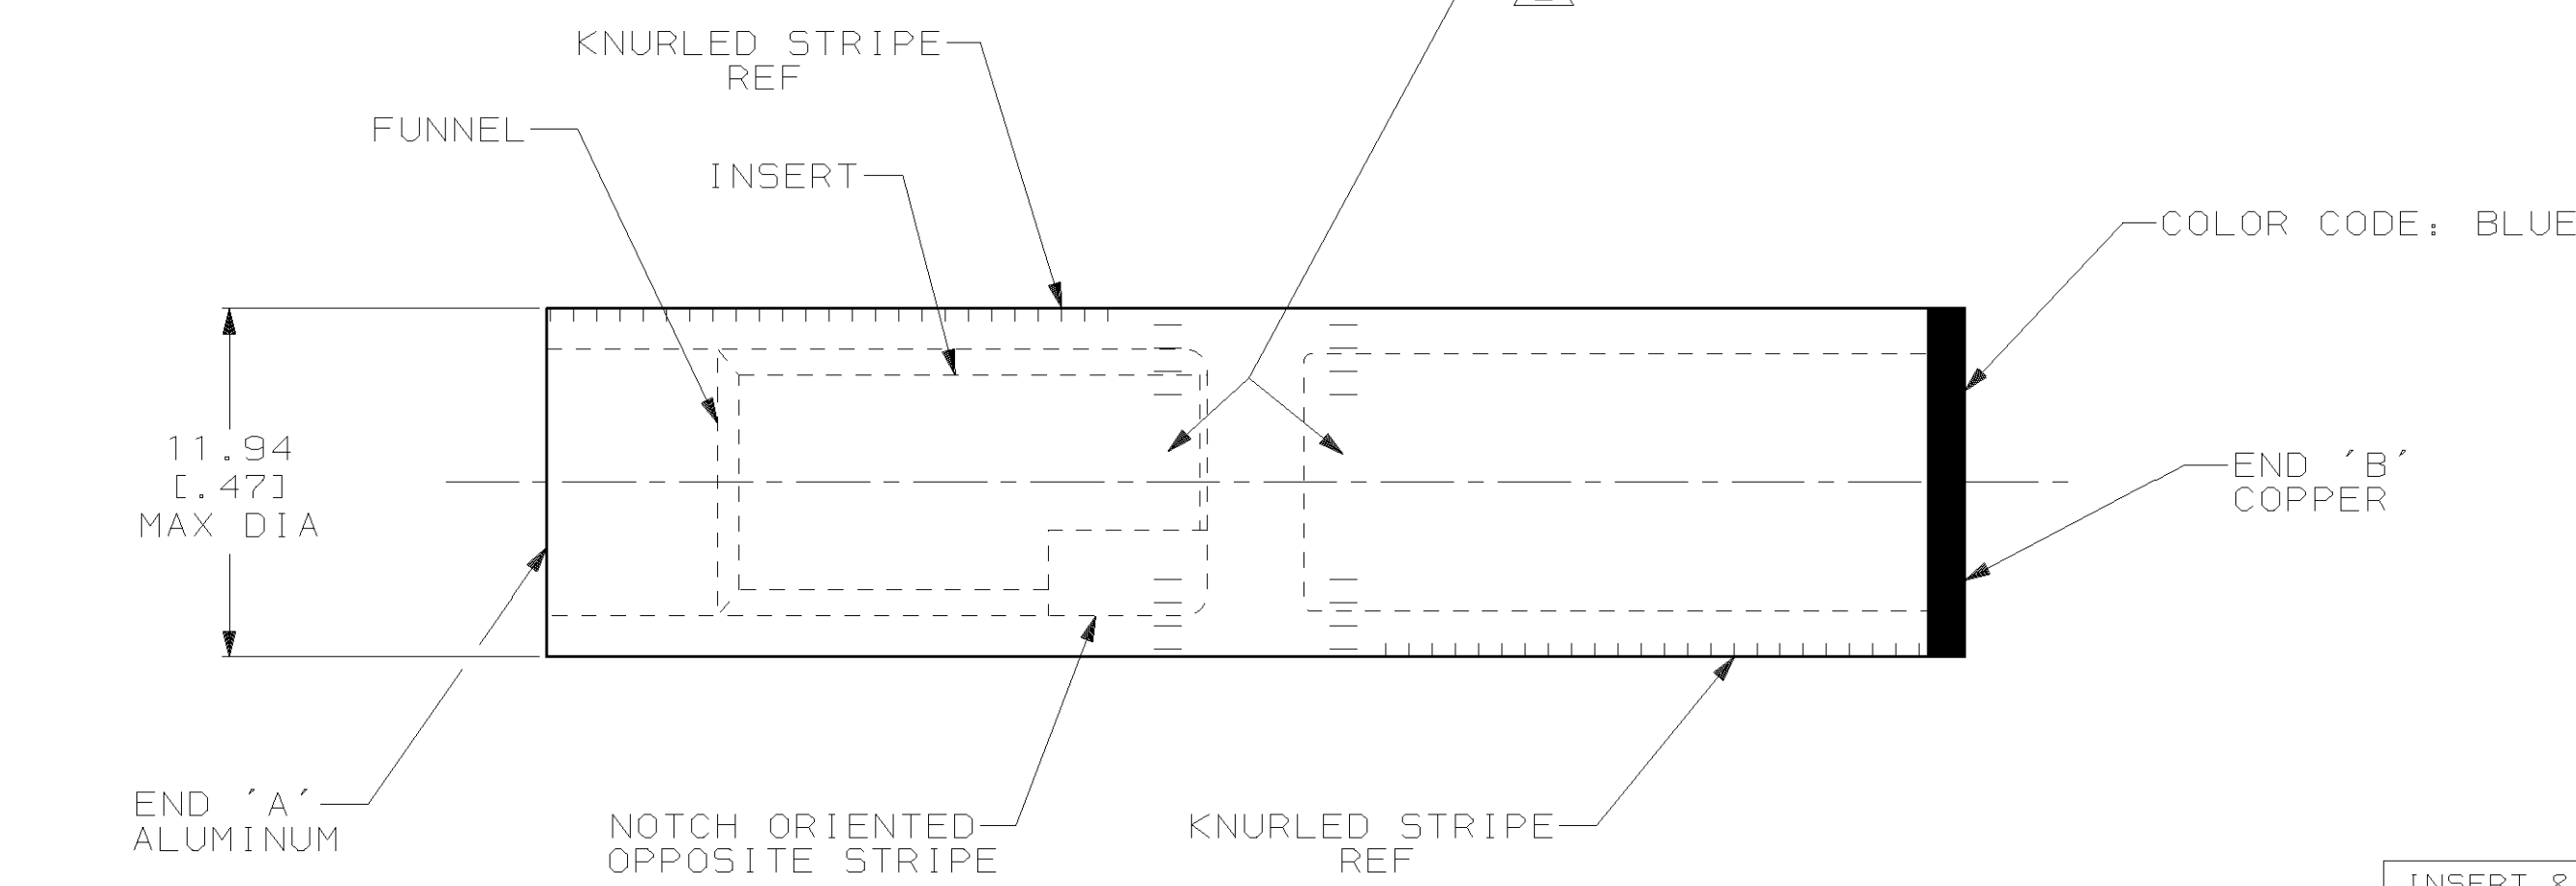

INSERT & FUNNEL: BRASS MIL-C-50 NICKEL PL QQ-N-290 0.00762 [.000300] AVG THK	277165-1
SPLICE: COPPER ASTM B-301 TIN PL MIL-T-10727 0.00381 [.000150] MIN THK	
PART NO	

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 7/6/89 DK SCHRUM	AMP Incorporated Harrisburg, PA 17105-3608
	CHK 5/1/91 MS FEHER	
MATERIAL SEE TABLE	APPD 2/24/92 WJ VOCKROTH	NAME WIRE SPLICE, TRANSITIONAL, COPALUM™, SEALED, WIRE SIZE: 21.9mm ² [4] ALUMINUM 22.0mm ² [4] COPPER
	APPD 2/24/92 CR RHODS	
FINISH SEE TABLE	PRODUCT SPEC 108-11011 TENTATIVE	SIZE C 00779
	APPLICATION SPEC 114-2134	CAGE CODE 00779
WEIGHT 26.0 ±10 GRAMS	SCALE 4:1	DRAWING NO 277165
		SHEET 1 OF 1

METRIC