

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 8901
 BODY & FITTINGS: NICKEL PLATED BRASS
 CONTACT: GOLD PLATED BRASS.
 DIELECTRIC: PTFE
 SPRING: NICKEL PLATED SK5
 GASKET: RED RUBBER

2. P/N: SR58BLK
 BOOT: BLK MOLDED PVC

3. P/N: Y-1000
 HOUSING: BLK MOLDED NYLON
 HARDWARE: SS SCREW, NUTS & WASHER

4. P/N: X100WBLK
 HOUSING: BLK MOLDED NYLON.
 CONTACT: GOLD PLATED BeCu.
 SPRING: STAINLESS STEEL.



5. P/N: X100WRED
 HOUSING: RED MOLDED NYLON.
 CONTACT: GOLD PLATED BeCu.
 SPRING: STAINLESS STEEL.

6. P/N: W-500/0
 20AWG TINNED COPPER STRANDING
 0.080 [2.03] O.D. PVC INSULATION

7. P/N: W-500/2
 20AWG TINNED COPPER STRANDING
 0.080 [2.03] O.D. PVC INSULATION

8. P/N: C-1000/0
 20AWG RG58C/U CABLE
 0.195 [4.95] O.D. PVC INSULATION

| LTR | REVISIONS | | DATE | APPROVED |
|-----|-------------|--|------|----------|
| | DESCRIPTION | | | |
| | | | | |

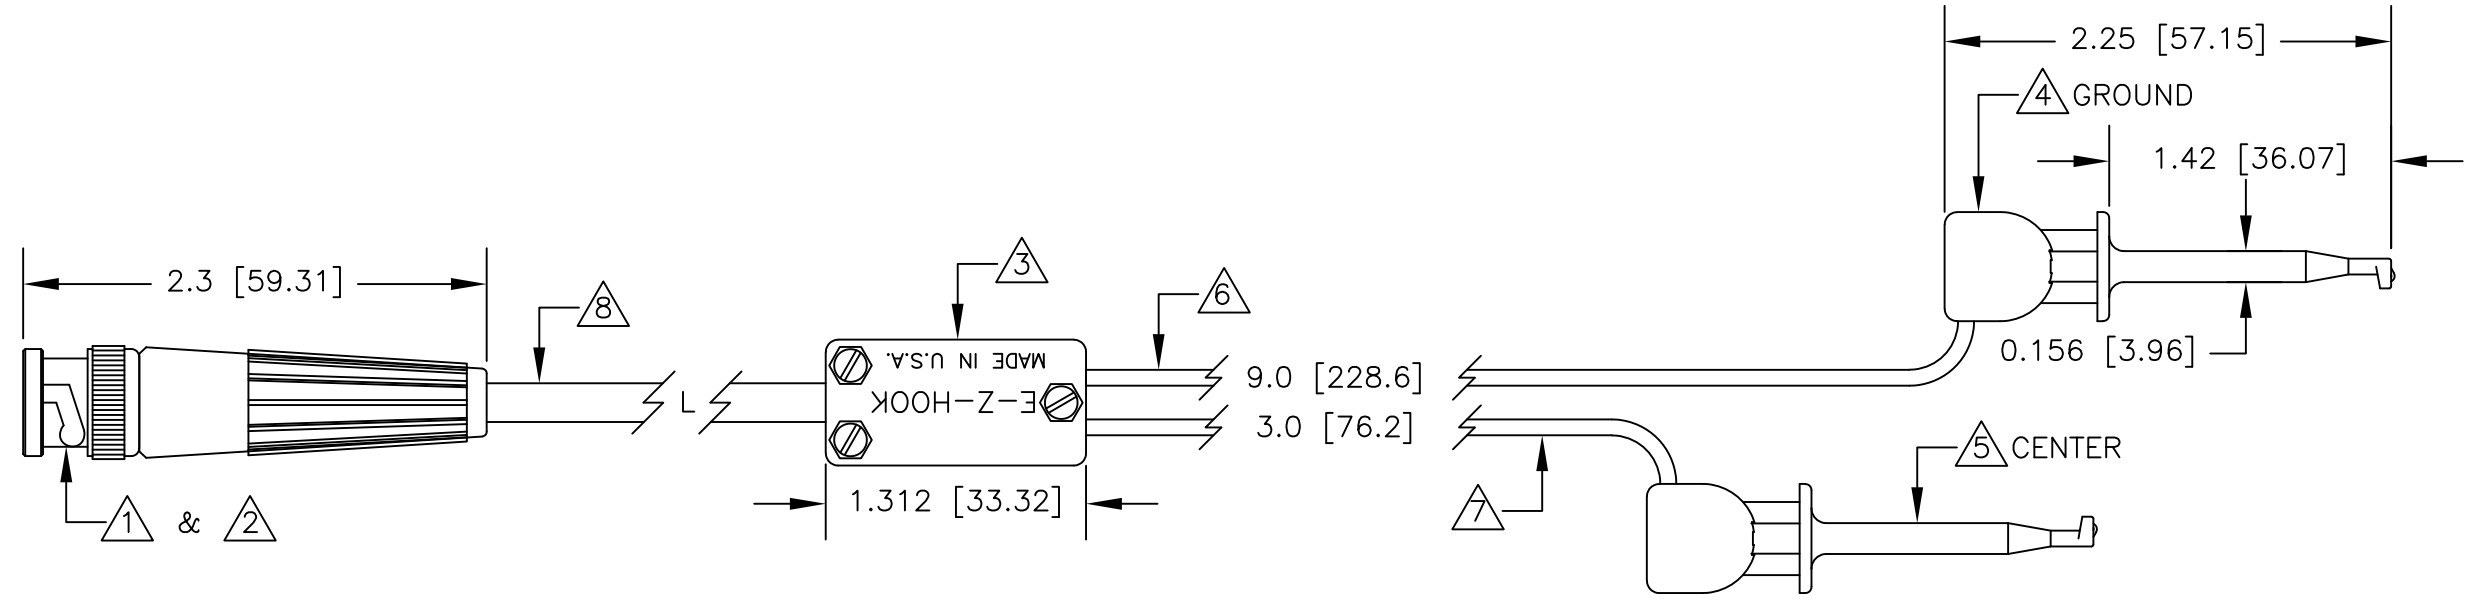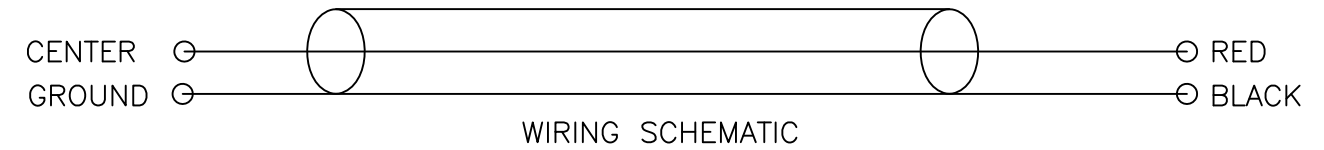

| | | | | | |
|-------------|---------|---|--------------|------|--|
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A | CONTRACT NO. | | E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. |
| | | | APPROVALS | DATE | |
| | | MATERIAL SEE NOTE | DRAWN R.L. | 8/18 | DESCRIPTION BNC MALE TO X100W MINI HOOK LEADS, RG58 CABLE |
| | | FINISH SEE NOTE | APPROVED BY | | |
| NEXT ASSY | USED ON | | | | SIZE B CODE IDENT NO. 08505 DRAWING NO. 1020 REV. |
| APPLICATION | | DO NOT SCALE DRAWING | | | SCALE 1:1 SHEET 1 OF 1 |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.