


View of magnetic surface

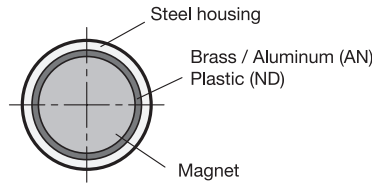

4 Type
E with threaded stud

2

3

$d_1 \pm 0,2$	d_2	$h \pm 0,2$	Length l	Nominal magnetic forces in N	
				AN AlNiCo	ND NdFeB
6	M 3	20	7	2	6
8	M 3	20	7	4	12
10	M 4	20	8	8,5	24
13	M 4	20	8	12	60
16	M 4	20	10	20	90
20	M 6	25	10	40	135
25	M 6	35	10	60	190
32	M 8	40	12	160	340
40	M 8	50	15	240	700
50	M 10	60	15	400	1000
63	M 12	65	20	660	1700

Specification

- Housing
Steel, zinc plated
- Materials of the magnet:
 - AlNiCo **AN**
Aluminum, nickel, cobalt
temperature resistant up to 450 °C
 - NdFeB **ND**
Neodymium, iron, boron
temperature resistant up to 80 °C
- RoHS

1

Information

Retaining magnets GN 52.4 are a shielded magnetic system.

see also...

- More information to retaining magnets → Page 1380 ff.
- Holding discs GN 70 → Page 1414
- Magnetic discs GN 70.1 → Page 1415

How to order

GN 52.4-ND-20-M6-E

1	Material of the magnet
2	d_1
3	d_2
4	Type