

A2100-A/B

Positioning Product

GPS Receiver Modules
Telematics Platforms



SiRFstarIV GPS Module: The Answer to All Challenges

The A2100 GPS modules enable fastest acquisition and tracking with the latest SiRFstarIV technology. With module versions supporting either 3.3V or 1.8V there is an appropriate solution for all telematics and power-sensitive mobile consumer application devices. In any case the module fully answers the demand for lowest power consumption with – amongst other features – SiRFaware™ technology. The removal of jammers does not only facilitate designs of new products, but guarantees operation even in hostile environments. Highest sensitivity, during acquisition or while tracking, allows for use in many different environments and under toughest conditions.

Features

- Complete GPS module
- Direct passive antenna support
- Jamming detection and removal

- Flash-based design

- Best acquisition sensitivity
- Lowest tracking power consumption
- SiRFaware™ for constant Hot Start

Benefits



- Easy integration
- Fastest design-in
- Minimal BOM

- Configuration / Firmware update

- Ideally suited for all small battery powered GPS applications

GPS Solutions for Many Applications

With the mission to support our customers in implementing GPS functionality into their systems, Maestro Wireless Solutions is offering a distinct product portfolio to address a wide area of applications. These range from traditional telematics solutions to latest highly integrated consumer devices, all of them having their special requirements towards a GPS module. Based on SiRFstarIII and now also SiRFstarIV chip sets, Maestro Wireless Solutions GPS module solutions address different specific needs and combine high performance, low power consumption, and simplified integration effort. Our modules comply with the RoHS standard and are 100% electrically and functionally tested prior to packaging, thereby assuring the guarantee of the highest quality products.

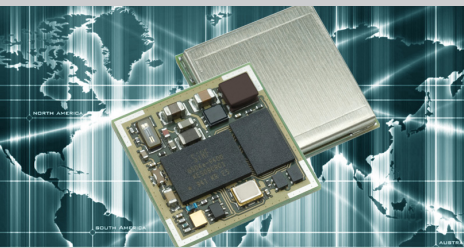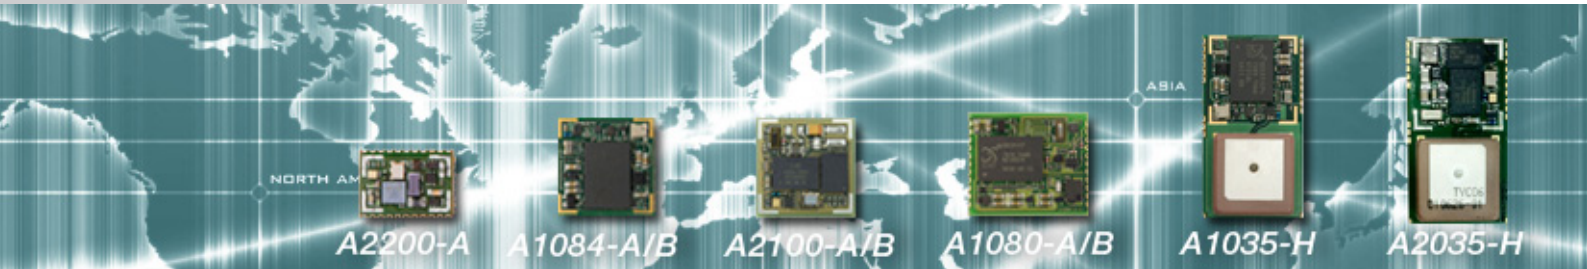

Ordering information:
A2100-A/Bxxx
EVA2100-A/B Evaluation Board

Technical Details A2100-A/B

PERFORMANCE

Channels	48
Correlators	~ 400,000
Frequency	LI - 1,575 MHz
Sensitivity¹	
Tracking	- 163 dBm
Navigation	- 160 dBm
Acquisition (cold start)	- 148 dBm
Position Accuracy²⁾ (horizontal)	< 2.5 m CEP (autonomous) < 2.0 m CEP SBAS
Time To First Fix	
Hot Start ²⁾	< 1 s
Warm Start ²⁾	< 32 s
Cold Start ²⁾	< 35 s
Navigation	
Update Rate	1 Hz / 5 Hz Supported

COMMUNICATION

UART - NMEA (Default)	
NMEA message Switchable	GGA, RMC, GSA, GSV, VTG, GLL, ZDA
Baud rate Switchable	4,800 (default) 1,200 to 115.2k
Ports	Tx (NMEA output) Rx (NMEA input)
UART - SiRF Specific SSB/OSP	
SiRFbinary protocol	Protocol for SiRFstar product family up to SSIII
One Socket Protocol	Protocol extension for SiRFstarIV
Baud rate Switchable	57.6k (default) 1,200 to 115.2k
Ports	Tx (Binary output) Rx (Binary input)
SPI - NMEA/SiRF Specific (for A/B)	
Clock	Up to 6.8 MHz
Ports	DO (NMEA / Binary output) DI (NMEA / Binary input) SPI CLK (clock - input) SPI CS (chip select - input)
I2C - NMEA/SiRF Specific (for B only)	
Clock	Up to 400 kbps
Ports	I2C DIO (NMEA / Binary input / output) I2C CLK (clock - input)

HIGHLIGHTS

SiRFnav™	High availability and coverage; improved TTFF in weak signal environments
SiRFaware™	Keeps module in a state of readiness for rapid navigation (hot start)
Jammer remover technology	Detects and removes up to 8 in-band jammers with minimal loss of sensitivity
A-GPS	Embedded Extended Ephemeris (SiRFInstantFix1) and Ephemeris Push support
MEMS I2C interface	Prepared to use additional sensor information for improved navigation
Flash-based design	Prepared to store configuration and calibration data and to allow firmware updates

POWER

Supply voltage	3.0 to 3.6 VDC [A2100-A] 1.7 to 1.9 VDC [A2100-B]
Power consumption	A2100-A (typical) A2100-B (typical)
Full Power Mode (searching) Peak Current	45mA 62mA
Full Power Mode (searching) Average Current	33.6mA 56.5mA
Full Power Mode (tracking) Average Current	18.5mA 39.7mA
SiRFaware™ Mode	40uA 31uA
Hibernate Mode	23.5uA 22uA
Antenna supply via Vant	
Voltage range	up to 5.0V up to 5.0V
Max. allowed current ³⁾	50 mA 50 mA

MECHANICAL

Dimensions	
L x W x H	15.2 x 15.2 x 2.4 mm ³
L x W x H	0.6" x 0.6" x 0.1"
Weight	1.2 g / 0.04 oz.

ENVIRONMENT

Temperature	
Operating	-40°C to +85°C
Storage	-40°C to +85°C
Humidity	Non condensing

1) With best matched antenna
2) All SVs with -130dBm

3) External current limiter suggested

The information provided herein is believed to be reliable at press time. Maestro Wireless Solutions assumes no responsibility for inaccuracies or omission. Maestro Wireless Solutions assumes no responsibility for the use of this information, and all such information shall be entirely at the users own risk. Prices and specifications are subject to change without notice. Maestro Wireless Solutions does not authorize or warrant any of its products for use in life support devices and/or systems

Maestro Wireless Solutions Ltd
3603-9, 36/F
118 Connaught Road West
Hong Kong
Tel: (852) 2869 0688
Fax: (852) 2525 4701
contact@maestro-wireless.com
www.maestro-wireless.com