

# HE. Oil level indicators

push-fit, polycarbonate



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15

## MATERIAL

Transparent high mechanical resistance polycarbonate. Not suitable for use with oils with additives and solvents. Avoid contact with alcohol or detergents containing alcohol.

## CONTRAST SCREEN

White lacquered aluminium with red level line.

## PACKING RING

NBR synthetic rubber O-Ring.

## MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.

## FEATURES AND APPLICATIONS

The push-fit assembly is guaranteed by optimised ribbings. Sealing is guaranteed by the O-ring. HE. oil level indicators push-fit are particularly suitable for assembly on reservoirs with limited pressure.

## NOTE

For use with other fluids with special additives, please contact ELESA Sales Department.


## ASSEMBLY INSTRUCTIONS

Chamfer hole 1x45° and grease slightly the outside surface of the O-ring to make assembly easier.



ELESA Original design

Conversion Table	
1 mm = 0.039 inch	
d1	
mm	inch
17	0.67
20	0.79
26	1.02
30	1.18
35	1.38
40	1.57
45	1.77

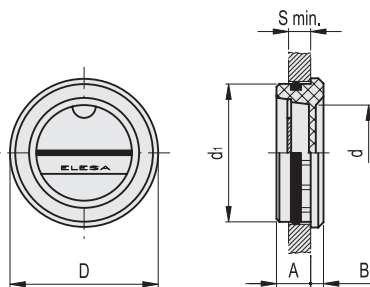

## METRIC

Code	Description	d1	A	B	D	d	Smin	Mounting hole d1 H11	⚖
11401	HE.17	17	6.5	3	18	9	5	17	2
11501	HE.20	20	8	3	21	12	6	20	3
11601	HE.26	26	7.5	3.5	28	17	6	26	5
11701	HE.30	30	8	4	32	20	7	30	7
11801	HE.35	35	9	4	38	25	8	35	10
11901	HE.40	40	10	4.5	43	28	9	40	13
12001	HE.45	45	11	5.5	47	32	9	45	18