Identification	Part No.	Drawing	Dimensions in mm
Cable assembly D-Sub HD 78 pole, male Hood: shielded plastic hood with side entry, screw 4-40 UNC Cable: 39 twisted pairs, AWG 26, double shielded, PVC Wiring: 1:1		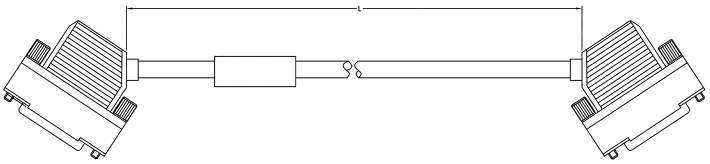	
Length: L = 0.5 m	33 56 212 0050 028		
L = 1.0 m	33 56 213 1000 002		
L = 2.0 m	33 56 213 2000 016		
L = 5.0 m	33 56 212 0500 029		
L = 10.0 m	33 56 212 1000 030		
L = 20.0 m	33 56 212 2000 031		
Cable assembly D-Sub HD 44 pole, male Hood: shielded plastic hood with side entry, screw 4-40 UNC Cable: 22 twisted pairs, AWG 26, double shielded, PVC Wiring: 1:1		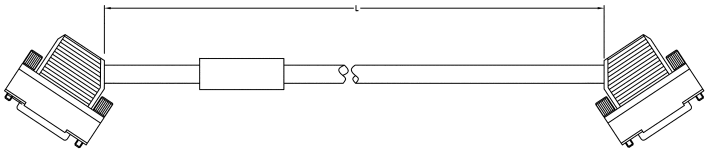	
Length: L = 0.5 m	33 56 213 0500 023		
L = 1.0 m	33 56 213 1000 024		
L = 1.5 m	33 56 213 1500 022		
L = 2.0 m	33 56 213 2000 025		
L = 5.0 m	33 56 213 5000 026		
L = 10.0 m	33 56 212 1000 027		
Cable assembly D-Sub HD 44 pole, male Hood: metal hood with top entry, screw 4-40 UNC Cable: 24 twisted pairs, AWG 26, double shielded, PVC Wiring: 1:1		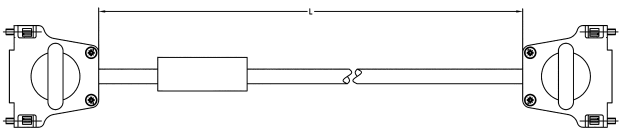	
Length: L = 0.5 m	33 56 212 0050 032		
L = 1.0 m	33 56 212 0100 033		
L = 5.0 m	33 56 212 0500 034		
L = 10.0 m	33 56 212 1000 035		
L = 20.0 m	33 56 212 2000 036		