



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## NTE3300 Insulated Gate Bipolar Transistor N-Channel Enhancement Mode, High Speed Switch TO220 Full Pack

**Features:**

- High Input Impedance
- Low Saturation Voltage
- Enhancement Mode
- 20V Gate Drive

**Applications:**



- High Power Switching
- Motor Control

**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Collector-Emitter Voltage, $V_{CES}$ .....	400V
Gate-Emitter Voltage, $V_{GES}$ .....	$\pm 25V$
Collector Current, $I_C$	
DC .....	10A
Pulse (1ms) .....	130A
Collector Power Dissipation, $P_C$	
$T_A = +25^\circ\text{C}$ .....	2W
$T_C = +25^\circ\text{C}$ .....	30W
Operating Junction Temperature, $T_J$ .....	$+150^\circ\text{C}$
Storage Temperature Range, $T_{stg}$ .....	$-55^\circ$ to $+150^\circ\text{C}$
Thermal Resistance, Junction-to-Case, $R_{thJC}$ .....	$4.16^\circ\text{C/W}$
Screw Torque .....	0.6N•m

**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Gate Leakage Current	$I_{GES}$	$V_{GE} = \pm 25V, V_{CE} = 0$	-	-	$\pm 100$	nA
Collector Cutoff Current	$I_{CES}$	$V_{CE} = 400V, V_{GE} = 0$	-	-	1.0	$\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CES}$	$I_C = 2\text{mA}, V_{GE} = 0$	400	-	-	V
Gate-Emitter Cutoff Voltage	$V_{GE(off)}$	$I_C = 1\text{mA}, V_{CE} = 5V$	4.0	5.0	7.0	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 130A, V_{GE} = 20V$ (Pulsed)	-	5.0	8.0	V
Input Capacitance	$C_{ies}$	$V_{CE} = 10V, V_{GE} = 0, f = 1\text{MHz}$	-	1350	-	pF
Rise Time	$t_r$	$V_{CC} = 300V$	-	0.1	0.5	$\mu\text{s}$
Turn-On Time	$t_{on}$		-	0.15	0.50	$\mu\text{s}$
Fall Time	$t_f$		-	4.0	6.0	$\mu\text{s}$
Turn-Off Time	$t_{off}$		-	4.5	7.0	$\mu\text{s}$

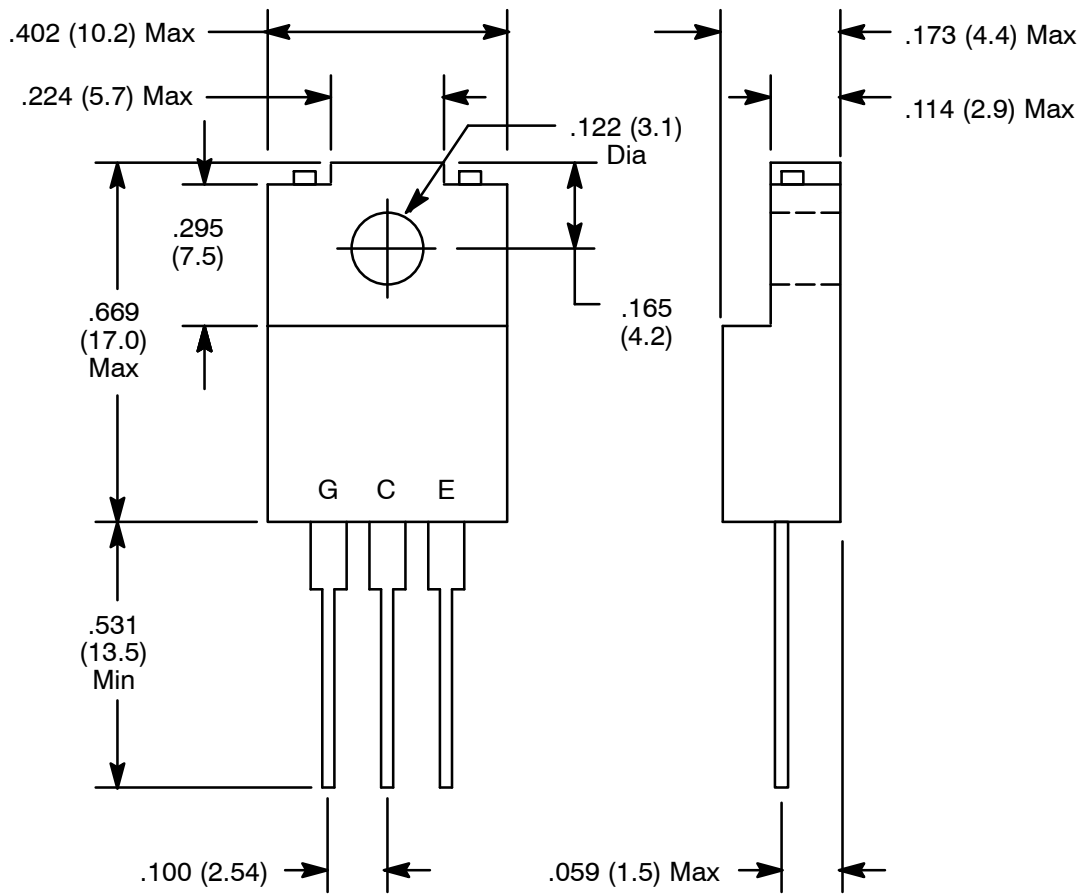

**NOTE:** Tab is isolated