

READERS WITHOUT LED

CZ-0- M12 (xxx)




Plastic casing

**Available versions: chromium plated or stainless steel
[SUS316]**

Standard wire length – 40 cm

**Chromium plated version is not suitable for hard
environmental conditions (we suggest using stainless steel
readers)**

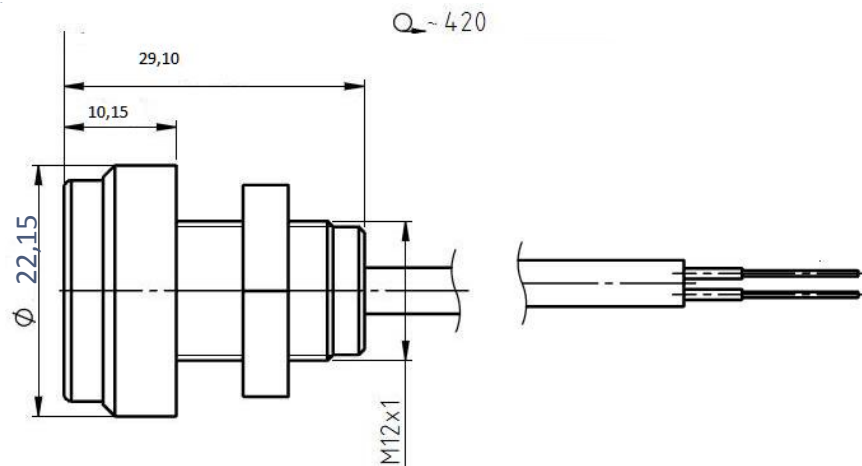

Technical data for chromium plated version.

The reader is designer to work with Maxim Dallas chips series DS19xx

1.Wires :	White – 1 wire signal Brown - GND
2.Application	Acces control device
3.Casing	Plastic (polyacetal)
4.Ring material	Ferrite steel + Cu + Ni + Cr ⁺³
5.Signal joint material	Brass + Ni +Cr ⁺³
6.Wire	2*0,25mm ² (technokabel)
7.Fastening method	M12x1 screw
8.Work enviroment	Residential, commercial and lightly industrial
9.Working temperature	From -40 °C to +85 °C
10.Humidity	Up to 70%