

- Foot & Finger Triggers
- Vacuum Pullback
- Timed & Continuous Modes



*AIR COMPRESSOR NOT INCLUDED

Electrically operated precision fluid dispenser with controlled timer.


An ideal solution for applying solder and brazing pastes, lubricants, epoxies, cyanoacrylates, anaerobics, gases, and acrylics.

Technical Specifications:

Model	105
Syringe Adapters	Available in 5, 10, and 30cc
Timer Ranges (Internal)	0.01-1, 0.01-10, 0.2-20 and 0.3-31 s
Size	9.75 x 8 x 3" (24.8 x 20.3 x 7.6 cm)
Cycle Initiation	Maintained or Momentary
Repeat Tolerance	±0.1%
Size	8.7 x 8.2 x 2.6" (22 x 21 x 6.7 cm)
Internal Voltage	24 VDC
Input Voltage	110V / 60Hz
Cycle Speed	600+/Minutes
Air Input	30-100 Psi
Air Output	1-100 Psi

Tip Size Chart

Gage	Size	Color
14	.063	White
15	.054	Brown
16	.047	Dark Purple
18	.033	Dark Green
19	.027	Light Green
20	.023	Pink
21	.020	Medium Purple
22	.016	Blue
23	.013	Orange
25	.010	Red
27	.008	Lavender
30	.007	Light Gray

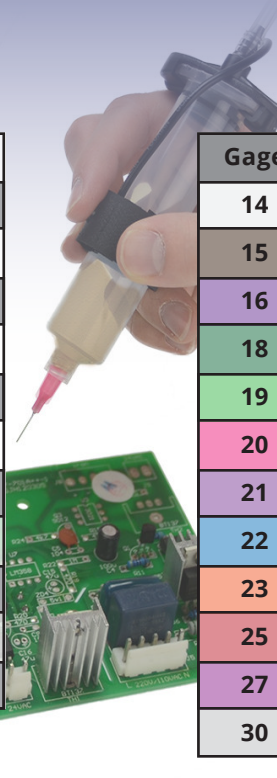

Scan Here to learn more!

24 Walpole Park South, STE #10
Walpole, MA 02081

508-668-6044
www.sra-solder.com