

TRC-190 Series

Rackmount chassis for the N Rack System™



- > 19-inch chassis for rack-mount use
- > 19 slots for high density applications
- > Supports hot-swap and dual power input with redundancy
- > Fanless chassis design reduces servicing costs



Introduction

The TRC-190 series provides 19 slots for media converter modules from the CSM-200 series of Ethernet-to-fiber modules and the TCF-142-RM series of serial-to-fiber modules. A TRC-190 chassis comes

with one AC or DC power input, with an optional redundant power expansion module available for greater reliability. The TRC-190 series' power input module supports the hot-swap feature.

Specifications

Physical Characteristics

Housing: SECC (1.2 mm)

Dimensions: 440 x 260 x 77 mm (18.6 x 11 x 3.3 in)

Weight: 5.2 kg (11.4 lbs), with one power module installed

Number of Slots: 19 slots in the front for slide-in modules, 2 slots in the back for power supply modules

Environmental Limits

Operating Temperature: 0 to 60°C (32 to 140°F)

Storage Temperature: -20 to 75°C (-4 to 167°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Power Requirements

Input Voltage: Universal 100 to 240 VAC (47 to 63 Hz) or 36 to 72 VDC

Power Consumption:

Max. Output: 3.2A @ 36VDC

Standards and Certifications

Safety: UL 60950-1, EN 60950-1

EMC: CE, FCC

EMI: EN 55022 Class A, FCC Part 15 Subpart B Class A

EMS:

EN 61000-4-2 (ESD) Level 3,

EN 61000-4-3 (RS) Level 2,

EN 61000-4-4 (EFT) Level 2,

EN 61000-4-5 (Surge) Level 2,

EN 61000-4-6 (CS) Level 2,

EN 61000-4-8 (PFMF) Level 3,

EN 61000-4-11 (DIPS)

Green Product: RoHS, CRoHS, WEEE

MTBF (mean time between failures)

Time: 1,055,112 hrs

Database: Telcordia (Bellcore), GB


Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

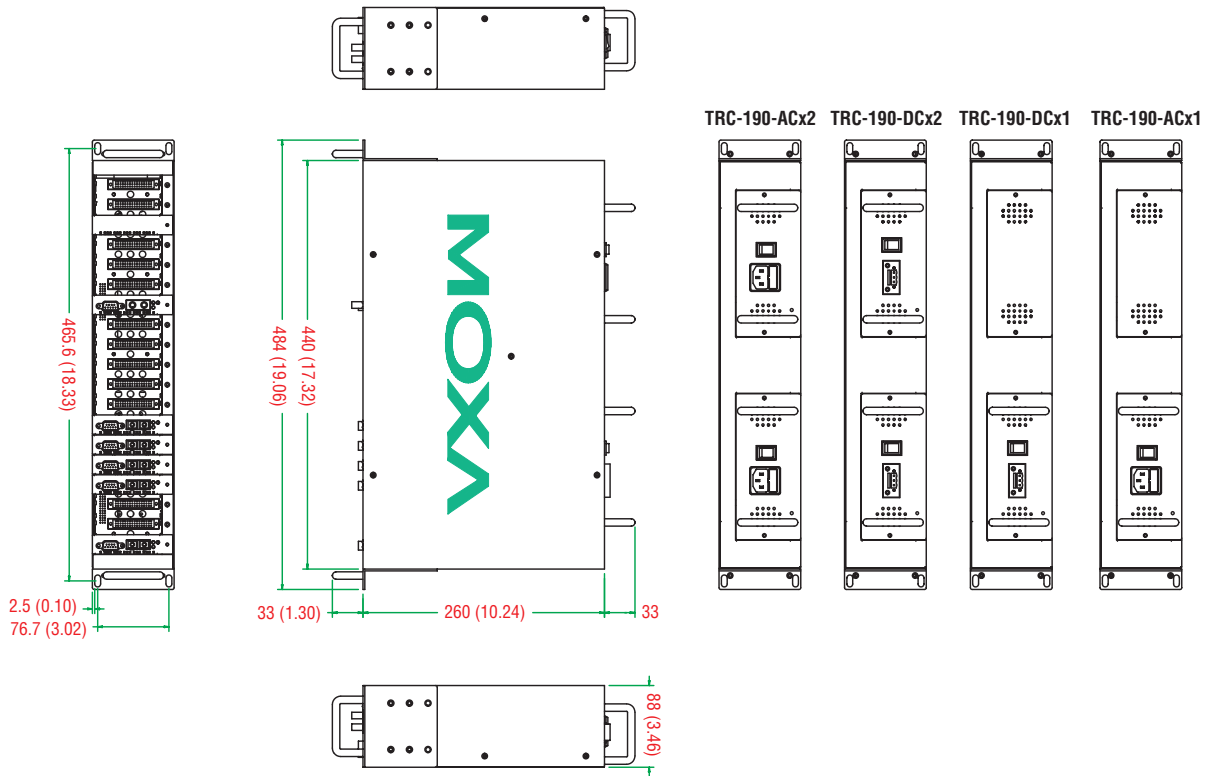

Ordering Information

Available Models

TRC-190-AC: Rack chassis, 2U, single 110 to 240 VAC input, with 19 slots on front panel
TRC-190-DC-48: Rack chassis, 2U, single 36 to 72 VDC input, with 19 slots on front panel

Available Slide-in Modules

CSM-200-1213: 10/100BaseT(X) to 100BaseFX slide-in module media converter, multi-mode ST connector
CSM-200-1214: 10/100BaseT(X) to 100BaseFX slide-in module media converter, multi-mode SC connector
CSM-200-1218: 10/100BaseT(X) to 100BaseFX slide-in module media converter, single-mode SC connector
TCF-142-M-SC-RM: RS-232/422/485 to multi-mode fiber slide-in module converter, SC connector
TCF-142-M-ST-RM: RS-232/422/485 to multi-mode fiber slide-in module converter, ST connector
TCF-142-S-SC-RM: RS-232/422/485 to single-mode fiber slide-in module converter, SC connector
TCF-142-S-ST-RM: RS-232/422/485 to single-mode fiber slide-in module converter, ST connector

Optional Accessories (can be purchased separately)

PWR-190-AC: Redundant power supply, 110 to 240 VAC
PWR-190-DC-48: Redundant power supply, 36 to 72 VDC
Plate-1: Face plate to cover unused front panel slots (required for all unused slots)

Package Checklist

- 1 TRC-190 with single power input
- Power cord (for TRC-190-AC only)
- 18 face plates
- User's manual (printed)
- Warranty card