


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART # | STUD SIZE | | DIMENSIONS in. [mm] | | | | |
|----------------|-----------|--------|---------------------|----------------|----------------|----------------|----------------|
| | ENGLISH | METRIC | L ± .03 [0,51] | W ± .01 [0,25] | C ± .02 [0,38] | M ± .03 [0,51] | H ± .01 [0,25] |
| PV18-4R | #4 | -- | .84 [21,3] | .25 [6,4] | .22 [5,6] | .69 [17,5] | .12 [3,1] |
| PMV1-3RB | -- | M3 | .82 [20,83] | .23 [5,84] | .22 [5,59] | .70 [17,78] | .13 [3,30] |
| PV18-6R | #6 | M3,5 | .86 [21,8] | .25 [6,4] | .22 [5,6] | .70 [17,8] | .15 [3,8] |
| PV18-8R | #8 | M4 | .91 [23,1] | .31 [7,9] | .26 [6,6] | .78 [19,8] | .17 [4,3] |
| PV18-10R | #10 | -- | .94 [23,9] | .31 [7,9] | .27 [6,9] | .78 [19,8] | .20 [5,1] |
| PMV1-5RB | -- | M5 | .91 [23,11] | .35 [8,89] | .29 [7,37] | .75 [19,05] | .21 [5,33] |
| PV18-14R | 1/4" | M6 | 1.11 [28,2] | .46 [11,7] | .37 [9,4] | .88 [22,4] | .27 [6,9] |
| PV18-56R | 5/16" | M8 | 1.11 [28,2] | .46 [11,7] | .39 [9,9] | .88 [22,4] | .34 [8,6] |
| PV18-38R | 3/8" | -- | 1.19 [30,2] | .53 [13,5] | .42 [10,7] | .96 [24,4] | .40 [10,2] |
| PV18-12R | 1/2" | M12 | 1.42 [36,1] | .72 [18,3] | .53 [13,5] | 1.06 [26,9] | .52 [13,2] |

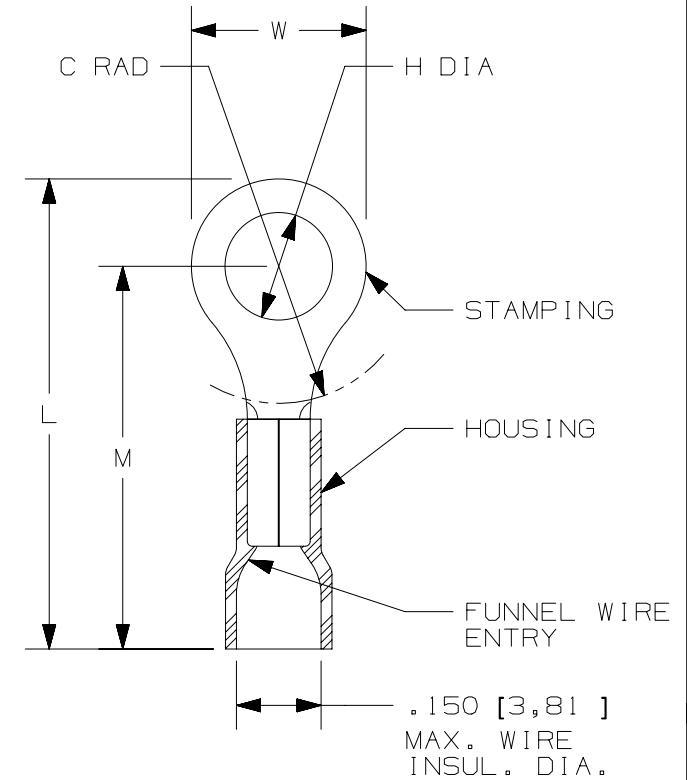

NOTES:

- USED FOR:
 - A. 22-16 AWG [0,5-1,5 mm²] SOLID OR STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600V. MAX. BLDG WIRE (1000 V. MAX. IN SIGNS, FIXTURES & LUMINAIRES)
- INSTALLATION TOOLS PANDUIT APPROVED:
 - A. UL APPROVED: CT-100A, CT-600-A (CT-550CH) CT-1550, CT-1551, CT-2500 (CT-2550CH)
 - B. PANDUIT APPROVED: CT-160, CT-260, CT-400
- WIRE STRIP LENGTH: 5/16 ^{+1/32}/₀ [7,9 ^{+0,8}/₀]
- MATERIAL:
 - A. STAMPING: .032" [0,8] THK COPPER, TIN PLATED
 - B. HOUSING: VINYL, RED
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT



LISTED
587H
E52164



CERTIFIED
LR31212

| | | | |
|---|-----------|--------------------------------|-----------------|
| TITLE #22-18 BARREL FUNNELED VINYL INSULATED RING TONGUE, .150 [3,81] MAX WIRE INSUL DIA. | | CUSTOMER DRAWING | |
| ITEM REVISION NAME N41268BA/11 | | PANDUIT TM | |
| DATASET FILE NAME N41268BA_DC/11A | | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2,54] .xxx ± .005 [0,127] .xx ± .01 [0,25] ANGLES ± 5° | | MATERIAL: SEE NOTES | |
| THIRD ANGLE PROJECTION | | DRAWING NUMBER: N41268BA-DC | |
| DRAWN BY DAW | DATE - | CHK CJH | SCALE N.T.S. |
| REV | | SHEET 1 OF 1 | |
| DESCRIPTION | | SIZE A | |

D10100DA/12