

August 1991

### Features


- 8A and 10A, 350V - 400V
- $r_{DS(on)} = 0.55\Omega$  and  $0.8\Omega$
- Single Pulse Avalanche Energy Rated\*
- SOA is Power-Dissipation Limited
- Nanosecond Switching Speeds
- Linear Transfer Characteristics
- High Input Impedance

### Description

The IRF740, IRF741, IRF742, and IRF743 are n-channel enhancement-mode silicon-gate power field-effect transistors. IRF740R, IRF741R, IRF742R and IRF743R types are advanced power MOSFETs designed, tested, and guaranteed to withstand a specified level of energy in the breakdown avalanche mode of operation. All of these power MOSFETs are designed for applications such as switching regulators, switching converters, motor drivers, relay drivers, and drivers for high-power bipolar switching transistors requiring high speed and low gate-drive power. These types can be operated directly from integrated circuits.


The IRF types are supplied in the JEDEC TO-220AB plastic package.

### Package

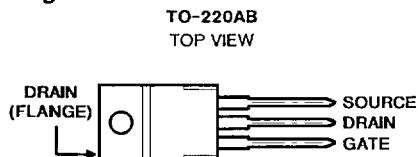

### Terminal Diagram

N-CHANNEL ENHANCEMENT MODE



**4**  
N-CHANNEL  
POWER MOSFETs

### Absolute Maximum Ratings ( $T_C = +25^\circ\text{C}$ ), Unless Otherwise Specified

	IRF740 IRF740R	IRF741 IRF741R	IRF742 IRF742R	IRF743 IRF743R	UNITS
Drain-Source Voltage (1) .....	$V_{DS}$ 400	350	400	350	V
Drain-Gate Voltage ( $R_{GS} = 20k\Omega$ ) (1) .....	$V_{DGR}$ 400	350	400	350	V
Continuous Drain Current					
$T_C = +25^\circ\text{C}$ .....	$I_D$ 10	10	8.0	8.0	A
$T_C = +100^\circ\text{C}$ .....	$I_D$ 6.3	6.3	5.2	5.2	A
Pulsed Drain Current (3) .....	$I_{DM}$ 40	40	33	33	A
Gate-Source Voltage .....	$V_{GS}$ $\pm 20$	$\pm 20$	$\pm 20$	$\pm 20$	V
Maximum Power Dissipation					
$T_C = +25^\circ\text{C}$ .....	$P_D$ 125	125	125	125	W
Linear Derating Factor .....	1.0	1.0	1.0	1.0	W/ $^\circ\text{C}$
Inductive Current, Clamped .....	$I_{LM}$ 40	40	32	32	A
(See Figure 14, $L = 100\mu\text{H}$ )					
Single Pulse Avalanche Energy Rating (4) .....	$E_{AS}^*$ 520	520	520	520	mJ
Operating and Storage Junction .....	$T_J, T_{STG}$ -55 to +150	-55 to +150	-55 to +150	-55 to +150	$^\circ\text{C}$
Temperature Range					
Maximum Lead Temperature for Soldering .....	$T_L$ 300	300	300	300	$^\circ\text{C}$
(0.063" (1.6mm) from case for 10s)					


#### NOTES:

- $T_J = +25^\circ\text{C}$  to  $+150^\circ\text{C}$ .
  - Pulse Test: Pulse width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .
  - Repetitive rating: Pulse width limited by maximum junction temperature. See Transient Thermal Impedance Curve (Figure 5).
  - $V_{DD} = 50\text{V}$ , starting  $T_J = +25^\circ\text{C}$ ,  $L = 9.1\text{mH}$ ,  $R_{GS} = 25\Omega$ ,  $I_{PEAK} = 10\text{A}$ . See Figure 15.
- \*R Suffix Types Only

**IRF740, IRF741, IRF742, IRF743 IRF740R, IRF741R, IRF742R, IRF743R**

**Electrical Characteristics**  $T_C = 25^\circ\text{C}$ , Unless Otherwise Specified

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
Drain-Source Breakdown Voltage IRF740/742, IRF740R/742R IRF741/743, IRF741R/743R	BV <sub>DSS</sub>	V <sub>GS</sub> = 0V, I <sub>D</sub> = 250μA	400	-	-	V
			350	-	-	V
Gate Threshold Voltage	V <sub>GS(TH)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA	2.0	-	4.0	V
Gate-Source Leakage Forward	I <sub>GSS</sub>	V <sub>GS</sub> = 20V	-	-	500	nA
Gate-Source Leakage Reverse	I <sub>GSS</sub>	V <sub>GS</sub> = -20V	-	-	-500	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = Max Rating, V <sub>GS</sub> = 0V	-	-	250	μA
		V <sub>DS</sub> = Max Rating x 0.8, V <sub>GS</sub> = 0V, T <sub>J</sub> = +125°C	-	-	1000	μA
On-State Drain Current (Note 2) IRF740/741, IRF740R/741R IRF742/743, IRF742R/743R	I <sub>D(ON)</sub>	V <sub>DS</sub> > I <sub>D(ON)</sub> x R <sub>DS(ON)</sub> Max, V <sub>GS</sub> = 10V	10	-	-	A
			8.3	-	-	A
Static Drain-Source On-State Resistance (Note 2) IRF740/741, IRF740R/741R IRF742/743, IRF742R/743R	r <sub>DS(ON)</sub>	V <sub>GS</sub> = 10V, I <sub>D</sub> = 5.2A	-	0.47	0.55	Ω
			-	0.68	0.80	Ω
Forward Transconductance (Note 2)	g <sub>fs</sub>	V <sub>DS</sub> ≥ 50V, I <sub>D</sub> = 5.2A	5.8	8.9	-	S(Ω)
Input Capacitance	C <sub>ISS</sub>	V <sub>GS</sub> = 0V, V <sub>DS</sub> = 25V, f = 1.0MHz See Figure 10	-	1250	-	pF
Output Capacitance	C <sub>OSS</sub>		-	300	-	pF
Reverse Transfer Capacitance	C <sub>RSS</sub>		-	80	-	pF
Turn-On Delay Time	t <sub>d(ON)</sub>		V <sub>DD</sub> = 200V, I <sub>D</sub> = 10A, R <sub>G</sub> = 9.1Ω	-	15	21
Rise Time	t <sub>r</sub>	See Figure 16. (MOSFET switching times are essentially independent of operating temperature)	-	25	41	ns
Turn-Off Delay Time	t <sub>d(OFF)</sub>		-	52	75	ns
Fall Time	t <sub>f</sub>		-	25	36	ns
Total Gate Charge (Gate-Source + Gate-Drain)	Q <sub>g</sub>	V <sub>GS</sub> = 10V, I <sub>D</sub> = 10A, V <sub>DS</sub> = 0.8V Max Rating. See Figure 17 for test circuit. (Gate charge is essentially independent of operating temperature.)	-	41	63	nC
Gate-Source Charge	Q <sub>gs</sub>		-	6.5	-	nC
Gate-Drain ("Miller") Charge	Q <sub>gd</sub>		-	23	-	nC
Internal Drain Inductance	L <sub>D</sub>	Measured from the contact screw on tab to center of die	-	3.5	-	nH
		Measured from the drain lead, 6mm (0.25in.) from package to center of die	-	4.5	-	nH
Internal Source Inductance	L <sub>S</sub>	Measured from the source lead, 6mm (0.25") from header and source bonding pad.	-	7.5	-	nH
Junction-to-Case	R <sub>θJC</sub>	-	-	1.0	°C/W	
Case-to-Sink	R <sub>θCS</sub>	Mounting surface flat, smooth and greased	-	0.5	-	°C/W
Junction-to-Ambient	R <sub>θJA</sub>	Free air operation	-	-	80	°C/W



**Source Drain Diode Ratings and Characteristics**

Continuous Source Current (Body Diode)	I <sub>S</sub>	Modified MOSFET symbol showing the integral reverse P-N junc. rectifier.	-	-	10	A
Pulse Source Current (Body Diode) (Note 3)	I <sub>SM</sub>		-	-	40	A
Diode Forward Voltage (Note 2)	V <sub>SD</sub>	T <sub>J</sub> = +25°C, I <sub>S</sub> = 10A, V <sub>GS</sub> = 0V	-	-	2.0	V
Reverse Recovery Time	t <sub>rr</sub>	T <sub>J</sub> = +25°C, I <sub>F</sub> = 10A, dI <sub>F</sub> /dt = 100A/μs	170	390	790	ns
Reverse Recovered Charge	Q <sub>RR</sub>	T <sub>J</sub> = +25°C, I <sub>F</sub> = 10A, dI <sub>F</sub> /dt = 100A/μs	1.6	4.5	8.2	μC
Forward Turn-on Time	t <sub>ON</sub>	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by L <sub>S</sub> + L <sub>D</sub> .	-	-	-	-

NOTES: 1. T<sub>J</sub> = +25°C to +150°C  
2. Pulse Test: Pulse width ≤ 300μs, Duty Cycle ≤ 2%

3. Repetitive Rating: Pulse width limited by max. junction temperature. See Transient Thermal Impedance Curve (Figure 5)

4. V<sub>DD</sub> = 50V, Start T<sub>J</sub> = +25°C, L = 9.1mH, R<sub>GS</sub> = 25Ω, I<sub>PEAK</sub> = 10A (See Figure 15)

Performance Curves

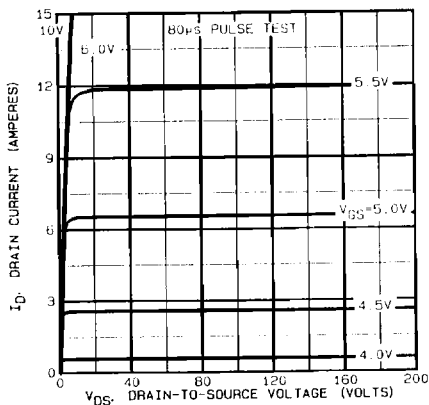


FIGURE 1. TYPICAL OUTPUT CHARACTERISTICS

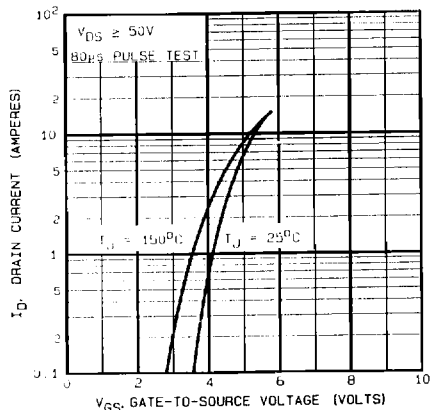


FIGURE 2. TYPICAL TRANSFER CHARACTERISTICS

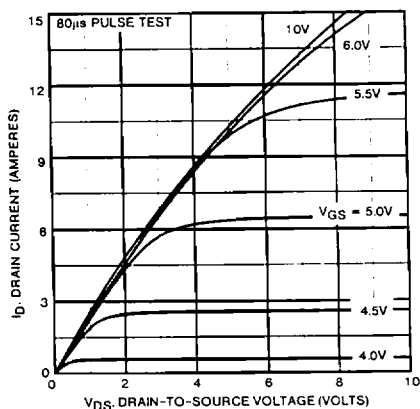


FIGURE 3. TYPICAL SATURATION CHARACTERISTICS

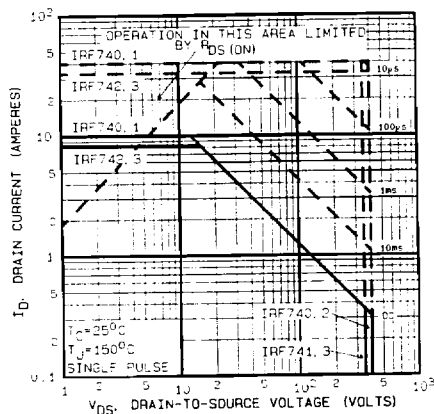


FIGURE 4. MAXIMUM SAFE OPERATING AREA

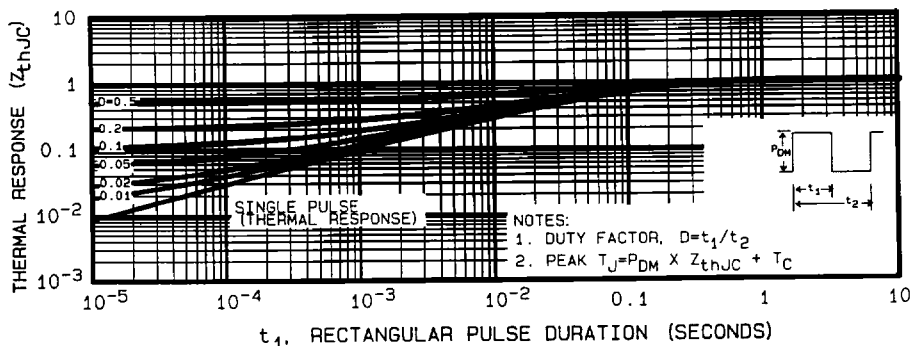


FIGURE 5. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs PULSE DURATION

Performance Curves (Continued)

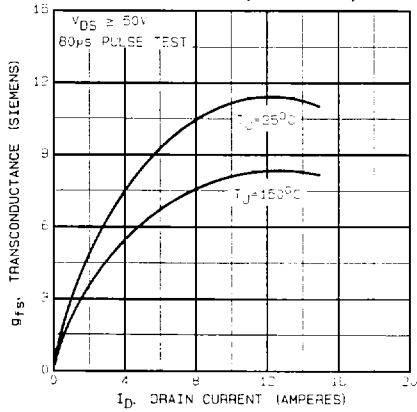


FIGURE 6. TYPICAL TRANSCONDUCTANCE vs DRAIN CURRENT

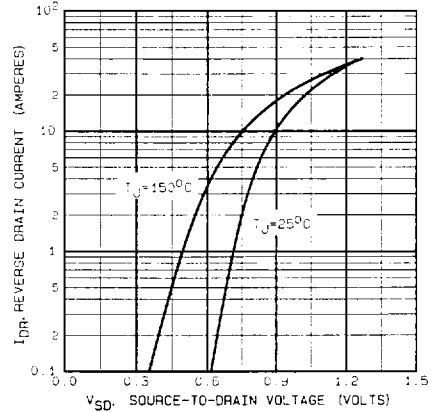


FIGURE 7. TYPICAL SOURCE-DRAIN DIODE FORWARD VOLTAGE

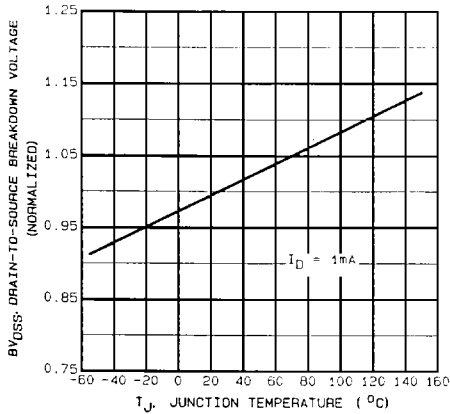


FIGURE 8. BREAKDOWN VOLTAGE vs TEMPERATURE

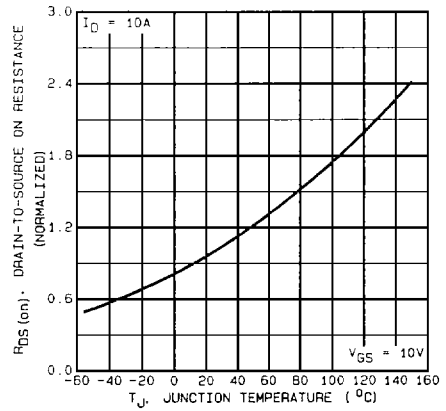


FIGURE 9. NORMALIZED ON-RESISTANCE vs TEMPERATURE

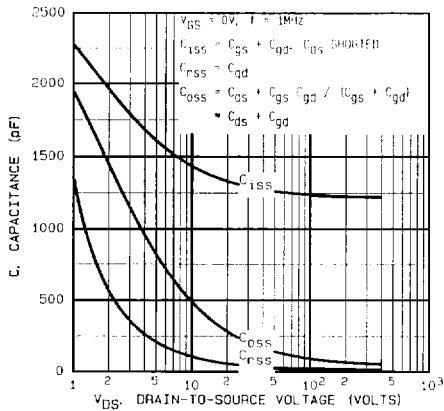


FIGURE 10. TYPICAL CAPACITANCE vs DRAIN-TO-SOURCE VOLTAGE

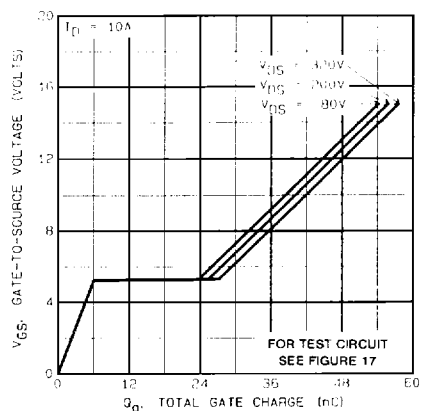


FIGURE 11. TYPICAL GATE CHARGE vs GATE-TO-SOURCE VOLTAGE

Performance Curves (Continued)

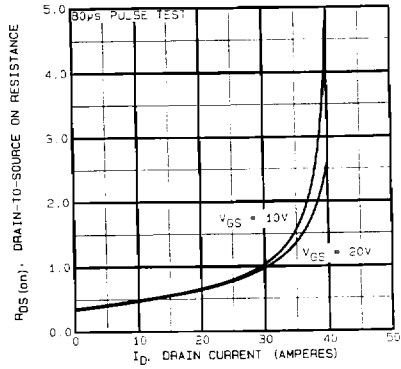


FIGURE 12. TYPICAL ON-RESISTANCE VS. DRAIN CURRENT

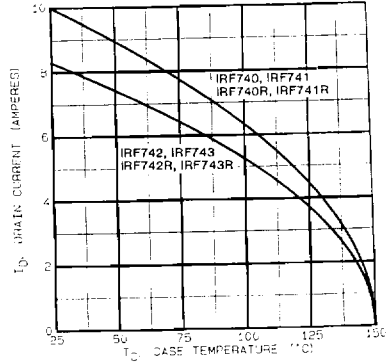


FIGURE 13. MAXIMUM DRAIN CURRENT VS. CASE TEMPERATURE

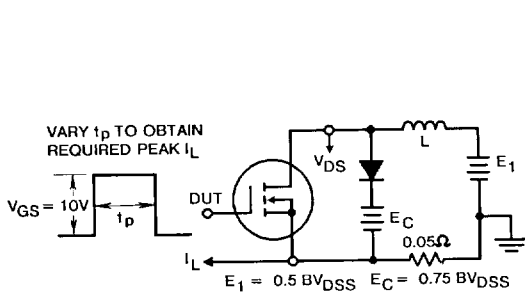


FIGURE 14a. CLAMPED INDUCTIVE TEST CIRCUIT

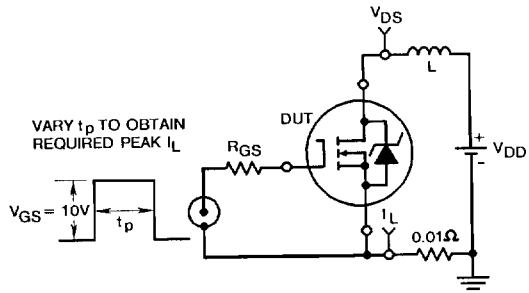


FIGURE 15a. UNCLAMPED ENERGY TEST CIRCUIT




FIGURE 14b. CLAMPED INDUCTIVE WAVEFORMS




FIGURE 15b. UNCLAMPED ENERGY WAVEFORMS

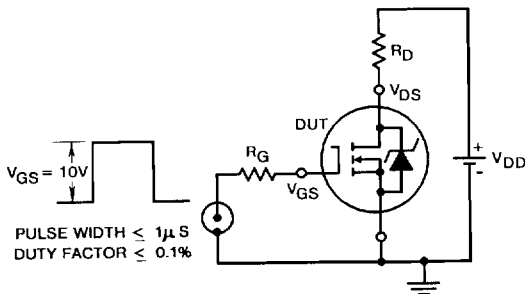


FIGURE 16. SWITCHING TIME TEST CIRCUIT

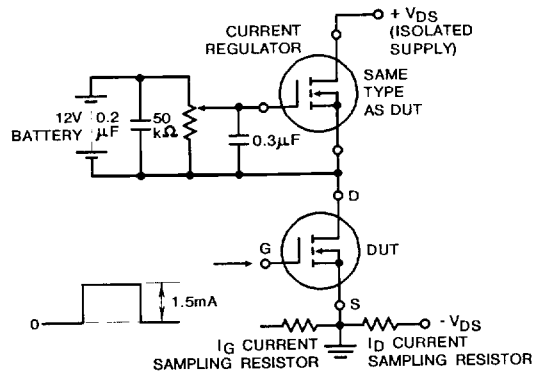


FIGURE 17. GATE CHARGE TEST CIRCUIT