


C)



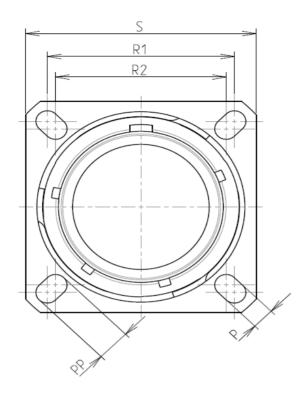



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

PLATING : S = Nickel

Н

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories

: 500 hours

8D 0

G

21

S

42

S

F

Е

-Temperature Range : -65°C to +200°C

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact


Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 31.75 R1 29.36 R2 S 39.7±0.3 V 20.07+0/-1.25 W 2.1/3.2 31.5 Max Ζ

Е

M31x1-6g

VV THREAD

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

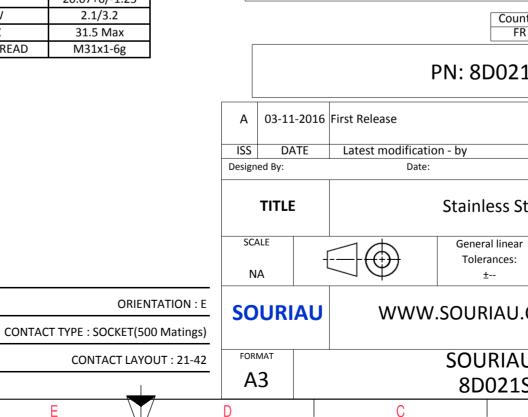

	Φ		A				
					4		
AS EXA	AMPLE				3		
s whic er of t ndatio untry FR	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third par			2		
	1	0.000000000		MOD N°	$\vdash$		
Stee	customer drawing eel Receptacle 8D series						
:	NPRDS / PROJECT <b>859</b>						
				perty of	1		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	DRG N°			SHEET			
LS4	2SE-C			1/2			
	В		А		-		

	Ŧ	۵	г	m			0	
		Contact Layout					Ра	nel Cutou
		42				SI	QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
4								2
		2#4 Power	1					
	Ctc A B	21-42 X Y 0 6.19 0 -6.19				¥		<u>T_</u>
							Dim ØA	
ယ							ØAA R1	
							ØT	
	-							
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional reco	oducts wh y either of
N								Country
							PN: 81	L
					A	03-11-2010	6 First Release	
					ISS	DATE	Latest modification - by	
					Design		Date:	
						TITLE	Stainl	ess Ste
<b>_</b>					SCA N.		-{	al linear rances: ±
					SO	URIAU	WWW.SOUR	RIAU.C
					FOR			RIAU
			-	- T	A	3	8D	021S4
	Н	G	l F	E	D		С	

