


NOTES:
 1. MATERIAL: PBT WITH 30% G.F. UL94 V-0. COLOR: BLACK
 2. BURRS MAX 0.10mm. ALL PIN HOLES NO BURRS.
 3. EJECTION MARK MAX 0.05. MUST BE BELOW PRODUCT SURFACE.

Position	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
9	18.66	15.66	11.83	16.26	12.26
15	26.42	23.28	19.50	23.88	19.88
25	40.20	37.18	32.22	37.70	33.70
37	57.00	53.72	47.55	54.32	50.32

Strain relief fit to :

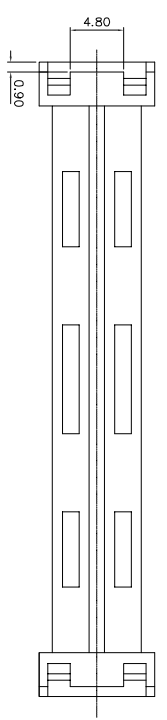

RoHS compliant
 Unit: mm

Scale	Free		
TOLERANCE			
X.X	±0.38		
X.XX	±0.25		
X.XXX	±x.13		
DIM	TOL		
Angle	±3°	Id.	
		Drawn	Modification
		18.05.2016	Winnie
		Date	Name
		18.05.2016	Winnie

Customer-No.	Date	Name	Customer-No.	Replace	Sheet
	18.05.2016	Winnie		ASS 7243 CO	rev00
	18.05.2016	Winnie		A-SUB-SR-xx0B	
				Drawing-No.	
				ASSMANN WSW-No.	
				ASSMANN	
				components	

1	2	3	4	5	6	7
H	G	F	E	D	C	B
1	2	3	4	5	6	7
H	G	F	E	D	C	B
CON0570						