

W-SZK, Pt Surface Temperature Sensor according to DIN EN 60751

Temperature range -20 °C to +110 °C

- Platinum sensor enclosed in PPE plastic housing
- Easy mounting via thru hole on housing
- Abrasion-resistant jacketed cable
- Versatile, easy to use design
- Largely resistant to greases, organic and inorganic bases and alkalis (medium concentration)

The Pt- RTD element is fully enclosed in a molded polypropylene housing, integrated thru-hole allows for easy mounting via a screw, rivet, etc. and is particularly suitable for surface measurements. Preferred applications include temperature measurement in gaseous media as well as in heating and air conditioning technology.

Nominal Resistance R ₀ [Ω]	Tolerance Class	Order Number
Pt100	F 0.3 / Class B	31600393
Pt1000	F 0.3 / Class B	30504002

Temperature and Tolerance Range

Tolerance Class F 0.3 / B -20 °C to +110 °C

Temperature Coefficient

TCR = 3850 ppm/K

Connection Wire

PVC jacket, PVC primary insulation
2x0.22 mm² (24 AWG) X 2.5 m long
Color: Black

Housing

Molded fiber - reinforced polypropylene
Color: Black

Applications

- HVAC
- Data Logging
- General purpose temperature sensing



Image for illustration purposes only

W-SZK, Pt Surface Temperature Sensor according to DIN EN 60751

Temperature range -20 °C to +110 °C

Features

- Rugged molded polypropylene housing
- Abrasion-resistant jacketed cable
- Versatile, multi purpose design
- Available in Pt 100 or Pt 1000 resistance values
- +110 °C maximum operating temperature

Options

- Wire length
- Resistance Value
- Connectors

Resistance vs Temperature Table

Reference table @ www.herae.us/technical-information

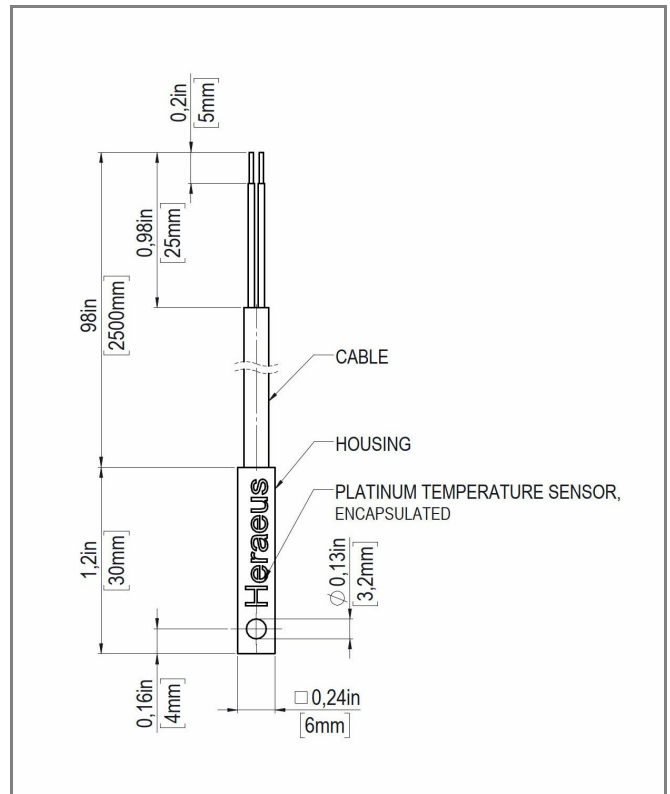


Image for illustration purposes only



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantees whatsoever. Furthermore, the information provided in this data sheet does not constitute a warranty, implied or express, whatsoever, including but not limited to warranties of merchantability, fitness for a particular purpose, or use. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use.

The customer is solely responsible to determine whether the product is suited for customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products of Heraeus is exclusively subject to the Terms and Conditions of Sale of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos USA, a division of Heraeus Epurio LLC, 770 Township Line Road, Suite 300, Yardley, Pennsylvania, USA 19067