



Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
03.1	Design Release		SEE ECN# 014145	EJF	11/16/17	KVH	11/16/17

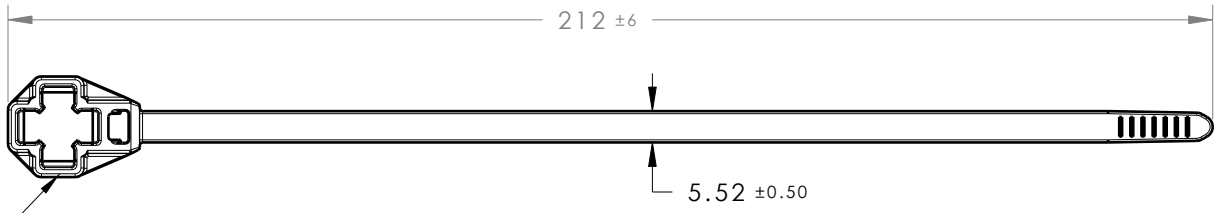


SQUARE PLUS SHAPE IS TOP OF PART AFTER INSTALLATION

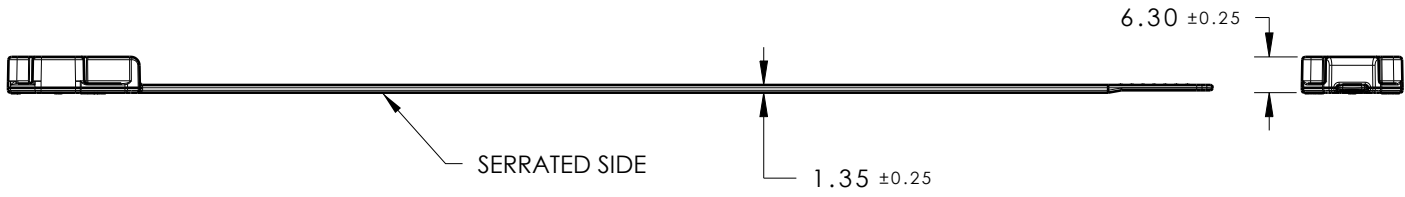

SERRATED SIDE


ARROWS POINT IN DIRECTION OF INSTALLATION

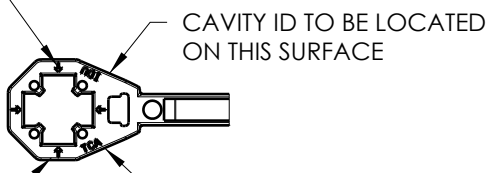

CAVITY ID TO BE LOCATED ON THIS SURFACE

TCA TO BE LOCATED ON THIS SURFACE

FLAT OCTAGON SHAPE IS BOTTOM OF PART AFTER INSTALLATION

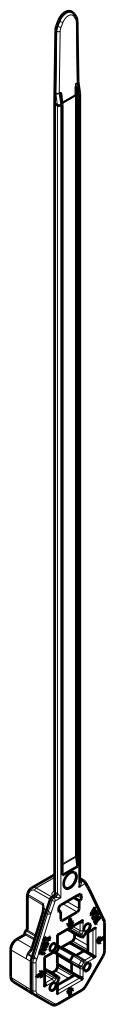

ISOMETRIC VIEW

PERFORMANCE REQUIREMENTS:

1. STUD MOUNT PUSH ON FORCE: 45 NEWTONS (10 LBS) MAX ON EACH APPLICABLE STUD SIZE AT DRY AS MOLDED
2. STUD MOUNT PULL OFF FORCE: 222 NEWTONS (50 LBS) MIN ON EACH APPLICABLE STUD SIZE AT 2.5% MOISTURE
3. APPLICABLE STUD SIZE:
  - A. M8 x 1.25
4. CABLE TIE MIN LOOP TENSILE STRENGTH: 355 NEWTONS (80LBS)
5. BUNDLE RANGE: 3.5MM TO 50MM
6. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
7. MAX ALLOWABLE FLASH OR MISMATCH TO BE 0.5MM

MATERIAL	COLOR
PA66HIRHS	BLACK
PA46	BROWN

Material SEE CHART COLOR: SEE CHART	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	EJF	4/13/17	Article/Type-No T80ROSLPSB8U	Scale	3:4	
	Tolerance defined on each dimension	HellermannTyton		Approved	KVH	4/14/17		Title LOW PROFILE M8 STUD MOUNT WITH 80LB CABLE TIE	Project Number	16-0334
				North America Email: corp@htamericas.com Web: www.hellermann.tyton.com		Drawing-No	16-0334-011-CSU		Production : Phase	Format AH
									Sheet	1/1