

NOTES:


- ① MAT'L: COPPER
- ② PLATING: ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS FUNNEL FERRULE
- ④ NYLON INSULATION (COLOR CODED RED)

STUD SIZES: (+.005)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING # E32244
 "CSA" LISTING # 18689

WIRE SIZE: 22-18 AWG
 .25-1.5 MM²

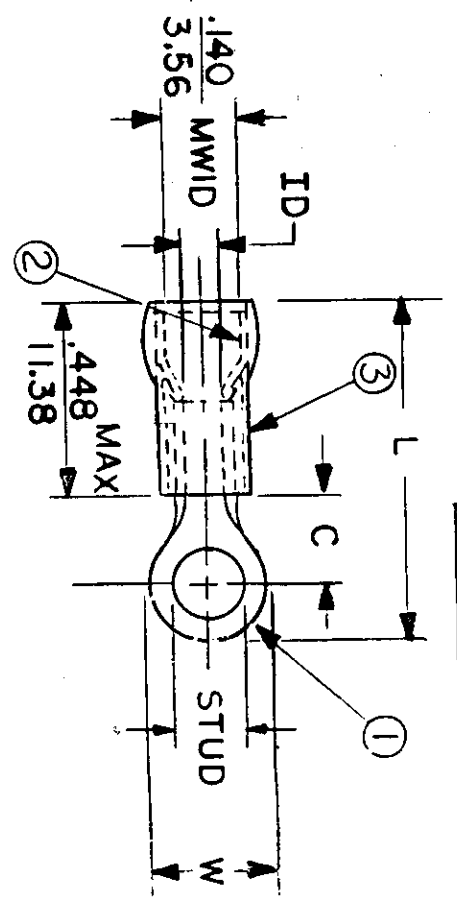

ALL DIMENSIONS = INCHES (MWD) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W"	"C" MIN.	"L" MAX.	"ID" MIN.	AVAILABLE STUD SIZES	STOCK THICKNESS
A-820-	.225 ±.010	.157 3.99	.757 19.23	.062 1.57	02, 04, 06	.028 ^{+.001} -.000
A-821-	.312 7.92	.270 6.86	.914 23.22	.062 1.57	06, 08, 10	.028 ^{+.001} -.000
A-822-	.467 11.86	.386 9.80	1.108 28.14	.062 1.57	10, 14, 56	.028 ^{+.001} -.000
A-826-	.534 13.56	.552 14.02	1.307 33.20	.054 1.37	10, 14, 56, 38	.031 ^{+.001} .79
A-832-	.254 6.45	.240 6.10	.855 21.72	.062 1.57	04, 06, 08	.028 ^{+.001} -.000

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED

REFERENCE SCALE: NTS DATE: 3-5-87

TITLE: RING TONGUE TERMINAL AVIKRIMP 800-SERIES



FRAC.	DEC.	ANG.	CHKD. BY:	APPRD. BY:	DWG. NO.	CUSTOMER DWG
±	±	±			A	