



UF180(55)APA series

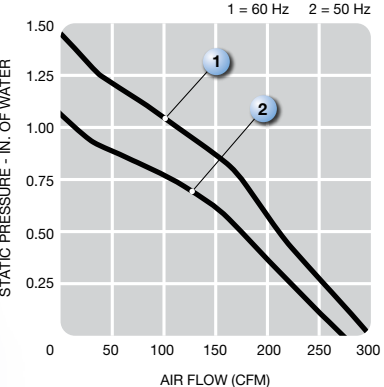

(182 dia. x 55 mm)
7.18 dia. x 2.17 inches

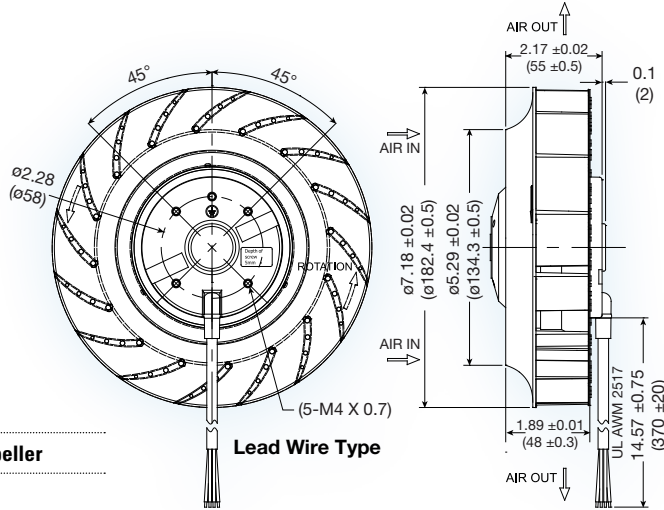

- Features:** backward curved impeller

- Operating voltage:** 115 or 230 VAC

- Construction:** aluminum die cast motor base; UL94V-0 reinforced nylon impeller

- Bearing option:** ball bearing

- Motor:** permanent split capacitor required capacitor included

- Air Flow:** centrifugal

- Connection:** 22 AWG lead wires

- Protection:** thermal

- Option:** tachometer output

Lead Wire Type

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dBa	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF180(55)APA12-H2C2A	115	50	63	0.60	0.92	2,550	7.5	265	26	1.0	64	1.2
	115	60	78	0.70	0.95	2,800	8.3	290	36	1.4	67	1.2
UF180(55)APA23-H2C2A	230	50	63	0.30	0.46	2,550	7.5	265	26	1.0	64	1.2
	230	60	78	0.34	0.48	2,800	8.3	290	36	1.4	67	1.2

