


12.6kW 3-Phase Local Metered PDU, 208V Outlets (36 C13 & 9 C19) Hubbell 50A CS8365C, 6 ft. (1.83 m) Cord, 0U Vertical, TAA

MODEL NUMBER: PDU3MV6H50

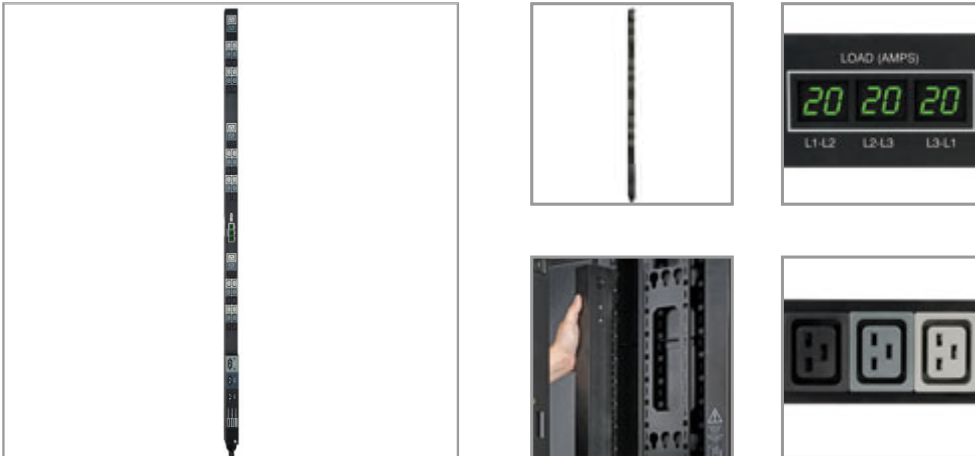

Features

- 12.6kW 3 phase 208V Local Metered Power Distribution Unit / PDU
- Set of 3 built-in current meters continuously report load current in amps for all 3 output phases
- Attached Hubbell CS8365C 50A (3P+E) 208V 3 phase input plug with 6 ft. / 1.8m cord
- 0U, 70 in. / 178cm vertical form factor supports installation in 2 or 4 post equipment racks
- 45 total 208V outlets (36 C13, 9 C19) arranged in three breakered single phase output load banks
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

Highlights

- Local Metered 12.6kW 3 Phase 208V PDU; 70 in. / 178cm 0U vertical rackmount
- Reports load current per-phase via set of 3 built-in current meters
- Hubbell CS8365C 50A (3P+E) 208V 3 phase input; 6-ft. (1.83 m) line cord
- 45 208V outlets total (36 C13, 9 C19)
- Toolless button-mount installation; cord retention brackets included
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

Package Includes

- Local Metered PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual

Specifications

| OVERVIEW | |
|--------------------------------|------------------------------|
| UPC Code | 037332163868 |
| PDU Type | Local Metered |
| INPUT | |
| PDU Input Voltage | 208 |
| Recommended Electrical Service | Three-phase 50A 208V service |
| Maximum Input Amps | 35 |

| | |
|--|--|
| Maximum Input Amps Details | Agency de-rated to 35A continuous |
| PDU Plug Type | HUBBELL CS8365C 50A |
| Input Phase | 3-Phase |
| Input Cord Length (ft.) | 6 |
| Input Cord Length (m) | 1.83 |
| OUTPUT | |
| Output Capacity Details | 12.6kVA (208V) total capacity; 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max per C13 outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (36) C13; (9) C19 |
| Output Nominal Voltage | 208V |
| Overload Protection | 3 20A circuit breakers, 1 per outlet bank |
| USER INTERFACE, ALERTS & CONTROLS | |
| Reported Load Segments | Supports local monitoring of current for each output phase (20A balanced max per L1-L2, L2-L3 and L3-L1); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds black outlets; L2-L3 feeds dark-gray outlets; L3-L1 feeds light-gray outlets |
| Front Panel LCD Display | Set of 3 digital current meters report current in amps for each output phase |
| SURGE / NOISE SUPPRESSION | |
| Automatic Shut-Off | No |
| PHYSICAL | |
| Material of Construction | Metal |
| Form Factors Supported | Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / in.) | 6.00 x 10.00 x 77.30 |
| Shipping Dimensions (hwd / cm) | 15.24 x 25.40 x 196.34 |
| Shipping Weight (lbs.) | 21.40 |
| Shipping Weight (kg) | 9.71 |
| Unit Dimensions (hwd / in.) | 70.000 x 2.200 x 2.650 |
| Unit Dimensions (hwd / cm) | 177.8 x 6.73 x 4.34 |
| Unit Weight (lbs.) | 14.5 |
| Unit Weight (kg) | 6.58 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 0C ~ 40C (32F ~ 104F) |
| Storage Temperature Range | -30°C to +60°C (-22°F to +140°F) |

| | |
|-------------------------------------|---|
| Relative Humidity | 5-95% non-condensing |
| Operating Elevation (ft.) | 0-10,000 |
| Operating Elevation (m) | 0-3000 |
| STANDARDS & COMPLIANCE | |
| Product Certifications | RETIE (Colombia); NOM (Mexico); UL 62368-1 |
| Product Compliance | RoHS; FCC Part 15 Class A (USA); Trade Agreements Act (TAA) |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |