

# XVC6B15SK

Harmony XVC, Monolithic precabled tower light, plastic, red, Ø60, base mounting, steady or flashing, buzzer, IP54, 24 V AC/DC



## Main

Range of Product	Harmony XVC6
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	1 illuminated unit
Sound signalling	Buzzer
Mounting diameter	2.36 in (60 mm)
Component name	XVC
Light source	LED steady or flashing red
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC
Noise level	70...85 dB continuous or intermittent tone)1 m

## Complementary

Material	Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94HB) top cover
Product mounting	On base
Cable cross section	0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG gauge	AWG 22
Cable length	33.46 in (850 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	65 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Net Weight	0.44 lb(US) (0.2 kg)
Height	4.76 in (120.8 mm)

## Environment

Standards	EN/IEC 61000-6-2 EN/IEC 61000-6-4 EN/IEC 61000-6-3
Product Certifications	UL
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class II EN/IEC 61140
IP degree of protection	IP54 flat surface installation EN/IEC 60529

## Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	3606480032691
Nbr. of units in pkg.	1
Package weight(Lbs)	15.17 oz (430 g)

Returnability	Yes
Country of origin	ID

### Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.46 in (8.8 cm)
Package 1 width	3.54 in (9 cm)
Package 1 Length	19.88 in (50.5 cm)
Unit Type of Package 2	S04
Number of Units in Package 2	12
Package 2 Weight	14.15 lb(US) (6.42 kg)
Package 2 Height	11.81 in (30 cm)
Package 2 width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)

### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>


### Contractual warranty

Warranty	18 months
----------	-----------

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

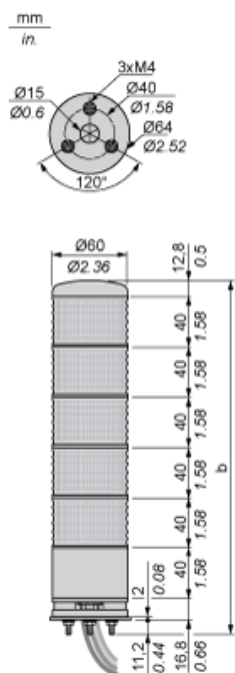

No. of illuminated units	b (mm)	b (in.)
1 stage	120.8	4.76
2 stages	160.8	6.33
3 stages	200.8	7.90
4 stages	240.8	9.48
5 stages	280.8	11.06

---

Pre-assembled and Pre-wired Tower Light

---

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

