



MM54C192/MM74C192

Synchronous 4-Bit Up/Down Decade Counter

MM54C193/MM74C193

Synchronous 4-Bit Up/Down Binary Counter

General Description

These up/down counters are monolithic complementary MOS (CMOS) integrated circuits. The MM54C192 and MM74C192 are BCD counters, while the MM54C193 and MM74C193 are binary counters.


Counting up and counting down is performed by two count inputs, one being held high while the other is clocked. The outputs change on the positive-going transition of this clock.

These counters feature preset inputs that are set when load is a logical "0" and a clear which forces all outputs to "0" when it is at a logical "1". The counters also have carry and borrow outputs so that they can be cascaded using no external circuitry.

Features

- High noise margin 1V guaranteed
- Tenth power TTL compatible Drive 2 LPTTL loads
- Wide supply range 3V to 15V
- Carry and borrow outputs for N-bit cascading
- Asynchronous clear
- High noise immunity 0.45 V_{CC} (typ.)

Connection Diagram

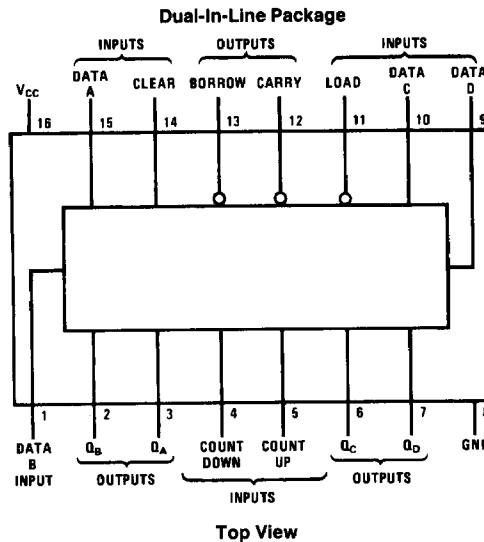

TL/F/5901-1

Top View

**Order Number MM54C192*, MM74C192*,
MM54C193* or MM74C193***

*Please look into Section 8, Appendix D for availability of various package types.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Voltage at Any Pin $-0.3V \text{ to } V_{CC} + 0.3V$

Operating Temperature Range (T_A)

MM54C154
MM74C154

-55°C to $+125^{\circ}\text{C}$

-40°C to $+85^{\circ}\text{C}$

Storage Temperature Range (T_S)	-65°C to $+150^{\circ}\text{C}$
Maximum V_{CC} Voltage	18V
Power Dissipation (P_D)	
Dual-In-Line	700 mW
Small Outline	500 mW
Operating V_{CC} Range	3V to 15V
Lead Temperature (T_A) (Soldering, 10 sec.)	260°C

DC Electrical Characteristics Min/Max limits apply across temperature range unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
CMOS TO CMOS						
$V_{IN(1)}$	Logical "1" Input Voltage	$V_{CC} = 5V$ $V_{CC} = 10V$	3.5 8.0			V
$V_{IN(0)}$	Logical "0" Input Voltage	$V_{CC} = 5V$ $V_{CC} = 10V$			1.5 2.0	V
$V_{OUT(1)}$	Logical "1" Output Voltage	$V_{CC} = 5V, I_O = -10 \mu\text{A}$ $V_{CC} = 10V, I_O = -10 \mu\text{A}$	4.5 9.0			V
$V_{OUT(0)}$	Logical "0" Output Voltage	$V_{CC} = 5V, I_O = 10 \mu\text{A}$ $V_{CC} = 10V, I_O = 10 \mu\text{A}$			0.5 1.0	V
$I_{IN(1)}$	Logical "1" Input Current	$V_{CC} = 15V, V_{IN} = 15V$		0.005	1.0	μA
$I_{IN(0)}$	Logical "0" Input Current	$V_{CC} = 15V, V_{IN} = 0V$	-1.0	-0.005		μA
I_{CC}	Supply Current	$V_{CC} = 15V$		0.05	300	μA

CMOS TO LPTTL INTERFACE

$V_{IN(1)}$	Logical "1" Input Voltage	54C $V_{CC} = 4.5V$ 74C $V_{CC} = 4.75V$	$V_{CC} - 1.5$ $V_{CC} - 1.5$			V
$V_{IN(0)}$	Logical "0" Input Voltage	54C $V_{CC} = 4.5V$ 74C $V_{CC} = 4.75V$			0.8 0.8	V
$V_{OUT(1)}$	Logical "1" Output Voltage	54C $V_{CC} = 4.5V, I_O = -100 \mu\text{A}$ 74C $V_{CC} = 4.75V, I_O = -100 \mu\text{A}$	2.4 2.4			V
$V_{OUT(0)}$	Logical "0" Output Voltage	54C $V_{CC} = 4.5V, I_O = 360 \mu\text{A}$ 74C $V_{CC} = 4.75V, I_O = 360 \mu\text{A}$			0.4 0.4	V

OUTPUT DRIVE (See 54C/74C Family Characteristics Data Sheet) (Short Circuit Current)

I_{SOURCE}	Output Source Current	$V_{CC} = 5V, V_{IN(0)} = 0V$ $T_A = 25^{\circ}\text{C}, V_{OUT} = 0V$	-1.75			mA
I_{SOURCE}	Output Source Current	$V_{CC} = 10V, V_{IN(0)} = 0V$ $T_A = 25^{\circ}\text{C}, V_{OUT} = 0V$	-8			mA
I_{SINK}	Output Sink Current	$V_{CC} = 5V, V_{IN(1)} = 5V$ $T_A = 25^{\circ}\text{C}, V_{OUT} = V_{CC}$	1.75			mA
I_{SINK}	Output Sink Current	$V_{CC} = 10V, V_{IN(1)} = 10V$ $T_A = 25^{\circ}\text{C}, V_{OUT} = V_{CC}$	8			mA

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

AC Electrical Characteristics* $T_A = 25^\circ\text{C}$, $C_L = 50 \text{ pF}$, unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{pd}	Propagation Delay Time to Q from Count Up or Down	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$		250 100	400 160	ns ns
	Propagation Delay Time to Q Borrow from Count Down	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$		120 50	200 80	ns ns
t_{pd}	Propagation Delay Time to Carry from Count Up	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$		120 50	200 80	ns ns
	Time Prior to Load that Data Must be Present	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$		100 30	160 50	ns ns
t_w	Minimum Clear Pulse Width	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$		300 120	480 190	ns ns
	Minimum Load Pulse Width	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$		100 40	160 65	ns ns
t_{pd0}, t_{pd1}	Propagation Delay Time to Q from Load	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$		300 120	480 190	ns ns
	Minimum Count Pulse Width	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$		120 35	200 80	ns ns
f_{MAX}	Maximum Count Frequency	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$	2.5 6	4 10		MHz MHz
	Count Rise and Fall Time	$V_{CC} = 5\text{V}$ $V_{CC} = 10\text{V}$			15 5	μs μs
C_{IN}	Input Capacitance	(Note 2)		5		pF
C_{PD}	Power Dissipation Capacitance	(Note 3)		100		pF



*AC Parameters are guaranteed by DC correlated testing.

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: Capacitance is guaranteed by periodic testing.

Note 3: C_{PD} determines the no load AC power consumption of any CMOS device. For complete explanation, see 54C/74C Family Characteristics, Application Note AN-90.


Cascading Packages

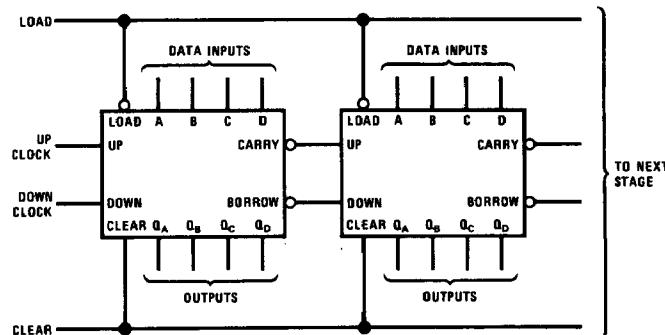

TL/F/5901-2

Timing Diagrams


MM54C192/MM74C192

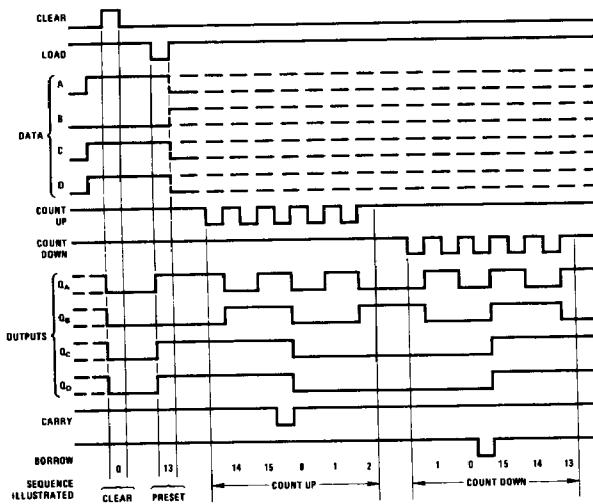

TL/F/5901-4

Note 1: Clear outputs to zero.**Note 2:** Load (preset) to binary thirteen.**Note 3:** Count up to fourteen, fifteen, carry, zero, one and two.**Note 4:** Count down to one, zero, borrow, fifteen, fourteen, and thirteen.

MM54C193/MM74C193

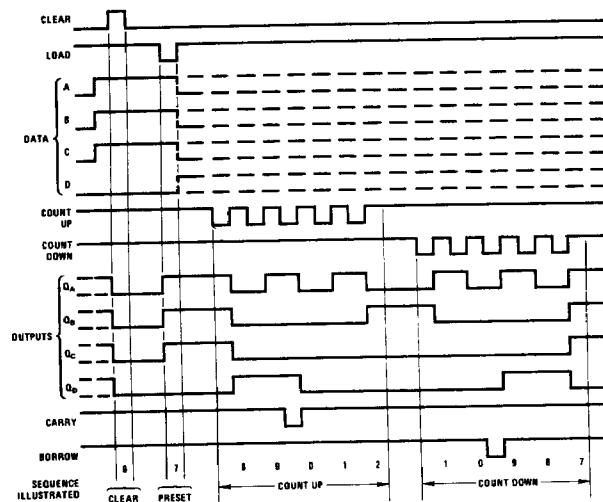


TL/F/5901-5

Note 1: Clear outputs to zero.**Note 2:** Load (preset) to BCD seven.**Note 3:** Count up to eight, nine, carry, zero, one, and two.**Note 4:** Count down to one, zero, borrow, nine, eight, and seven.**Note A:** Clear overrides load, data, and count inputs.**Note B:** When counting up, count down input must be high; when counting down, count-up input must be high.


Schematic Diagrams

MM54C192 Synchronous 4-Bit Up/Down Decade Counter

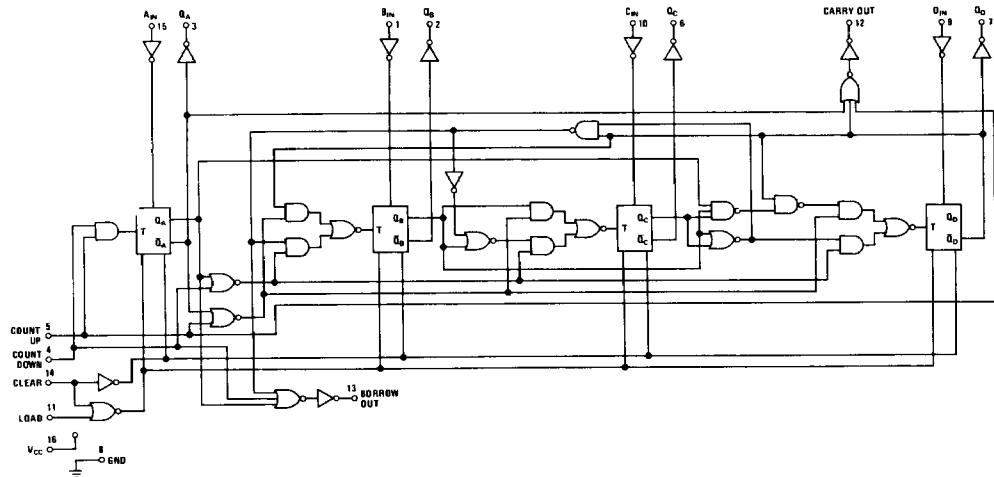

TL/F/5901-6

MM54C193 Synchronous 4-Bit Up/Down Binary Counter

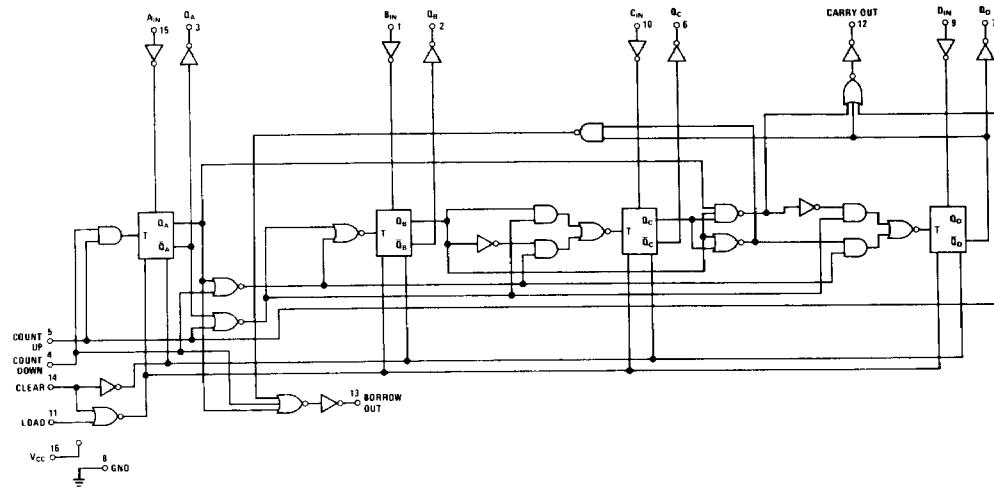

TL/F/5901-7