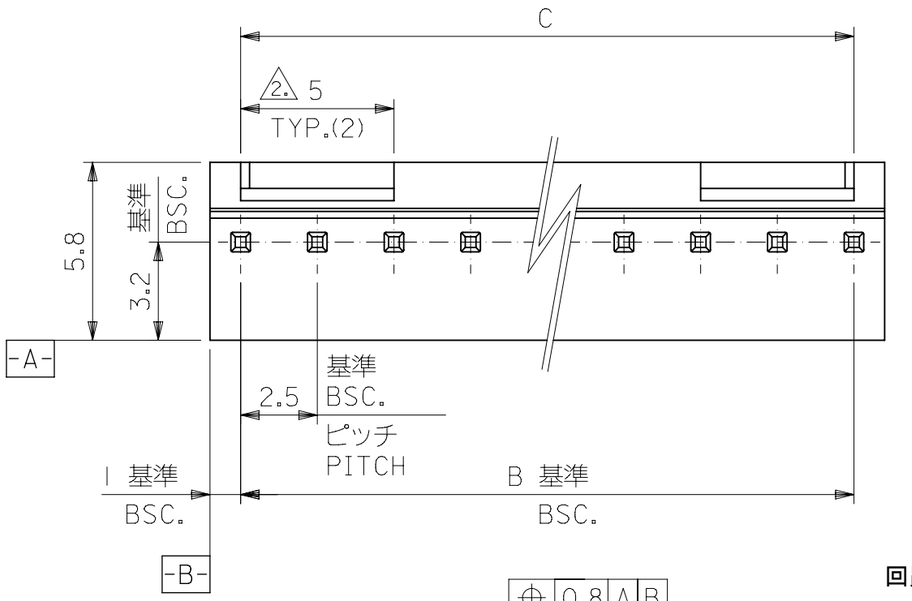

公差非累積
NON-ACCUMULATIVE

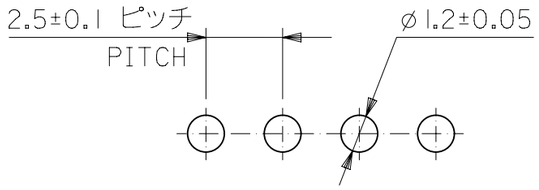

基板取付穴推奨寸法
RECOMMENDED P.C.BOARD HOLE DIM.

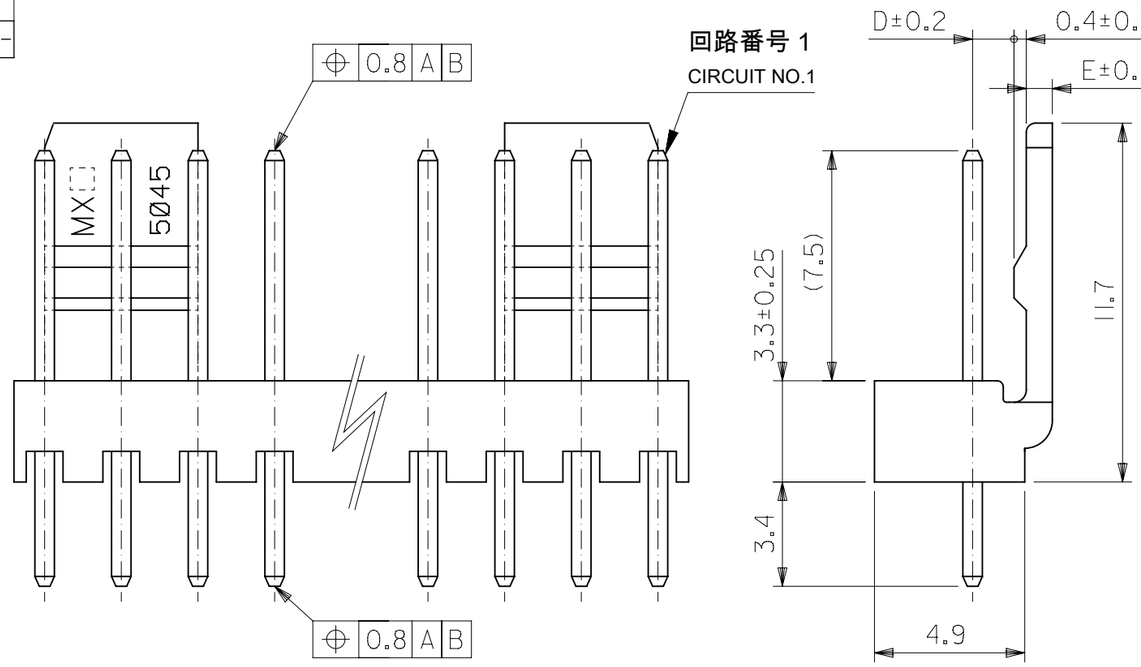

注：
NOTE

1. 材料
   MATERIAL
   ピン：□0.635×14.2黄銅、銅下地錫めっき
   PIN：□0.635×14.2 BRASS TIN OVER COPPER PLATING
   ウエハー：ポリアミド、UL94V-0
   WAFER: POLYAMIDE,UL94V-0
2. 6極以上に適応
   TO BE APPLIED FOR 6 CKT.AND MORE THAN 6 CKT.
3. 5極以下はロック部スリットなし
   NO SLIT IS PROVIDED FOR 5 CKT.AND LESS THAN 5 CKT.
4. ELV 及び RoHS 適合品
   ELV AND RoHS COMPLIANT

D	E	C	B	ORDER No.	極数 CKT.
1.35	0.85	35 +0.3 -0.45	35	22 04 1151	15
		32.5 +0.25 -0.45	32.5	1141	14
		30 +0.25 -0.4	30	1131	13
		27.5 +0.25 -0.4	27.5	1121	12
		25 +0.2 -0.4	25	1111	11
		22.5 +0.2 -0.4	22.5	1101	10
		20 +0.15 -0.35	20	1091	9
		17.5 +0.15 -0.35	17.5	1081	8
		15 +0.1 -0.3	15	1071	7
		12.5 +0.1 -0.3	12.5	1061	6
		10 +0.15 -0.3	10	1051	5
1.35	0.85	7.5 +0.15 -0.3	7.5	1041	4
1.2	1	5 +0.15 -0.3	5	1031	3
1.2	1	2.5 +0.15 -0.3	2.5	22 04 1021	2

MODEL No. : 5045-**A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISED
EC NO: 167225 2017/10/18
DRWN: KYAMADA02 2017/10/26
CHK'D: SAKIYAMA 2017/10/26
APPR: TKANEKO

REV
M

GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± 3.0 °

4 PLACES	± 0.4
3 PLACES	± 0.4
2 PLACES	± 0.4
1 PLACE	± 0.4
0 PLACES	± 0.4

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS: mm
SCALE: 5:1
DRWN BY: KKOHAMA DATE: 2000/03/27
CHK'D BY: KASAKAWA DATE: 2012/01/30
APPR BY: NUKITA DATE: 2013/06/13
DRAWING SIZE: A3
THIRD ANGLE PROJECTION

molex®

MINI-LATCH 2.5 HEADER ASS'Y ST WITH LOCK

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
5045	SEE CHART	GENERAL MARKET

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
SD-5045-NA	PSD	001	1 OF 1

RELEASE STATUS	P1	RELEASE DATE	26.10.2017 10:47:45

FORMAT: master-tb-prod-A3
REVISION: G
DATE: 2017/02/06