COMUS Group

COMUS EUROPE

Proximity Switch - Reed Switch based - Rectangular
Change Over Contacts
Part Number : MMPSC 130/300 Suggested Magnet: MMPSM
Product Data Sheet

PICTURE

DIMENSIONS

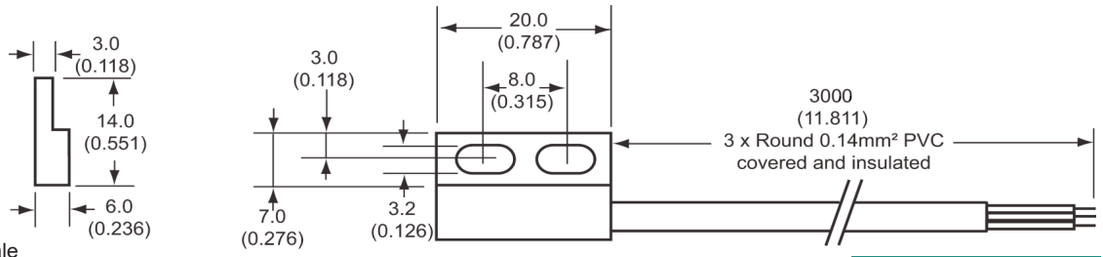

Drawings not to scale
All dimensions in mm nominal

✔RoHS Compliant

SPECIFICATION

Contact Form / Style		Change Over
Switching Voltage	Volts DC Max	175
Breakdown Voltage	Volts Min	200
Switching Current	Amps DC Max	0.4
Carry Current	Amps DC Max	0.5
Switching Power	Watts Max	5
Contact Resistance	Ohms	>1
Operating Temperature		-20°C to +70°C

Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

Features

- 3 core black cable with internal colours - White / Brown / Green.
- Black right hand entry Nylon 66 housing
- IP67 and IP65 rated

Did you know we also sell?

Reed Switches | Magnets | Solid State Relays | Tilt / Tip Switches | Movement Sensors

Rev. No.	Revision Note	Date	Signature
1	Datasheet Created	02-11-18	HC

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236 www.comus-intl.com Fax: +44 (0)1255 862014

ISO 9001:2015
Certificate No: FM21080

©2018 Copyright Comus Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.
USA: Comus International:+1 973 777 6900, Belgium: Comus Belgium BVBA: +32 (0)12 390400