


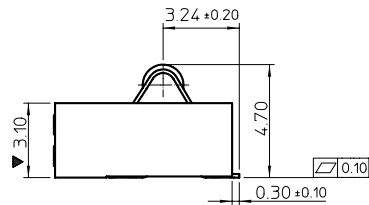
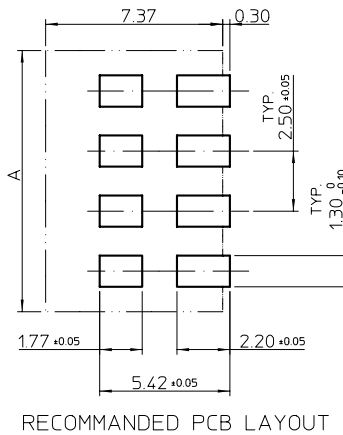



PICK-N-PLACE AREA
2.75 MIN. NOZZLE AREA

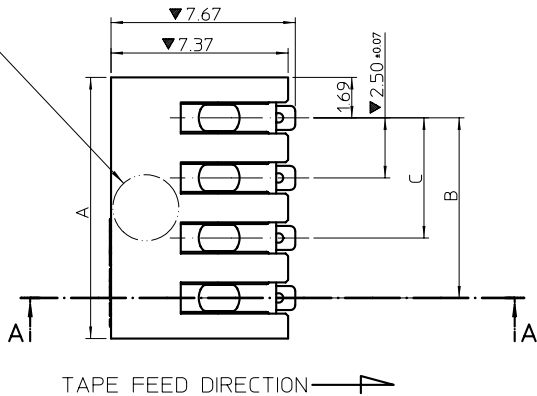

CUSTOMER'S P/N 3989331K01, SEE NOTE 5

	P/N	CKTS	A	B	C
△	67370-0001	4	10.87±0.15	7.50	5.00
	67370-0003	3	8.37±0.15	/	5.00
	67370-0002	2	5.87±0.15	/	/
△ △	67370-0004	4	10.87±0.15	7.50	5.00

Section A-A



NOTES:

- MATERIAL :
HOUSING : LIQUID CRYSTAL POLYMER (LCP) 30% GLASS FILLED, UL 94V-0 , COLOR : BLACK .
TERMINAL : BERYLLIUM COPPER (BeCu) , 190 HM (TM04), THICKNESS : 0.15mm +/- 0.01mm, PER : 67999-0101
- FINISH : PER : ES-88-J-851
CONTACT AREA : GOLD (Au) , THICKNESS = 3 MICROINCH MINIMUM / 0.08 MICROMETER MINIMUM.
OVER PALLADIUM NICKEL (Pd/Ni, 80/20), THICKNESS=25 MICROINCH MINIMUM. / 0.64 MICROMETER MINIMUM.
SOLDER TAIL : TIN-LEAD (Sn/Pb, 90/10), THICKNESS = 150 MICROINCH MINIMUM. / 3.8 MICROMETER MINIMUM.
UNDER PLATE : SOFT NICKEL (Ni) OVERALL, THICKNESS= 50 MICROINCH MINIMUM./ 1.3 MICROMETER MINIMUM.
- PACKAGING SPECIFICATION REFER TO: PK-67370-001
- PRODUCT SPECIFICATION REFER TO: PS-67370-001
- 67370-0001 IS WITH CUSTOMER'S P/N 3989331K01
67370-0002 IS WITHOUT CUSTOMER'S P/N 3989331K01
67370-0003 IS WITHOUT CUSTOMER'S P/N 3989331K01
67370-0004 IS WITHOUT CUSTOMER'S P/N 3989331K01

EC NO: T2001-0181 DRWN: YCHEN 2001/07/17 CHKD: 2001/07/17 APPR: MLAI 2001/07/17	QUALITY SYMBOLS ▽ = 4 ∇ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY			
			mm	INCH	DIMENSION STYLE MM ONLY		TITLE			
		4 PLACES	± ---	± ---	DRAWN BY	DATE	2.50 MM SMT BATTERY CONNECTOR			
		3 PLACES	± ---	± ---	VLIN	2000/12/17	MOLEX INCORPORATED			
2 PLACES	± 0.25	± ---	CHECKED BY		DATE	MATERIAL NO.	DOCUMENT NO.	SHEET NO.		
1 PLACE	± 0.25	± ---	APPROVED BY		DATE	SEE TABLE	SD-67370-002	1 OF 2		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ± 3 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1

F


E

D

C

B

A

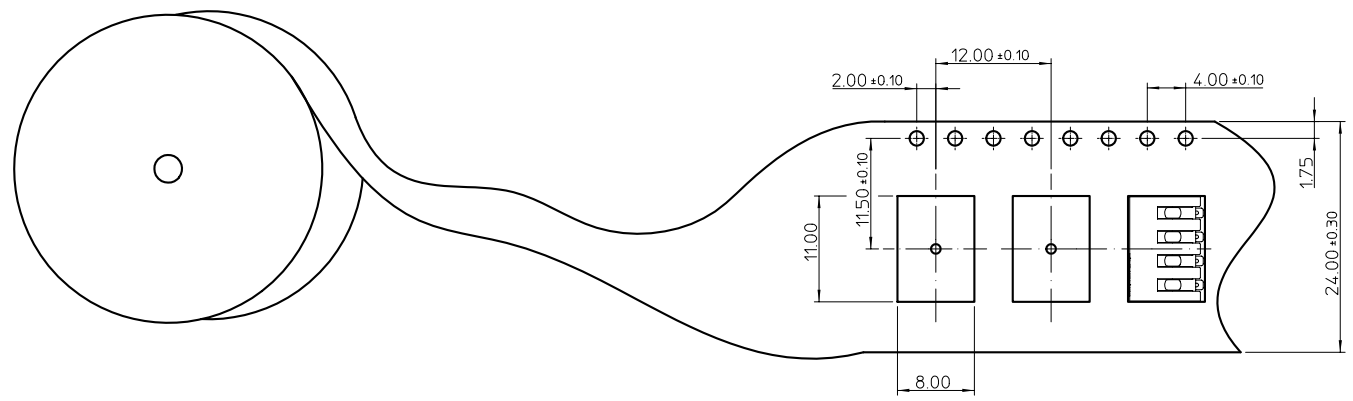

TAPE FEED DIRECTION

EC NO: T2001-0181 DRWN: YCHEN 2001/07/17 CHKD: 2001/07/17 APPR: MLAI 2001/07/17	QUALITY SYMBOLS ▽ = 0 ◻ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	DESCRIPTION	mm INCH	DIMENSION STYLE MM ONLY		TITLE 2.50 MM SMT BATTERY CONNECTOR			
REV	DESCRIPTION	4 PLACES ± --- ± ---	DRAWN BY DATE		MOLEX INCORPORATED			
		3 PLACES ± --- ± ---	VLIN 2000/12/17		MATERIAL NO. DOCUMENT NO. SHEET NO.			
		2 PLACES ± 0.25 ± ---	CHECKED BY DATE		SEE SHEET 1 SD-67370-002 2 OF 2			
		1 PLACE ± 0.25 ± ---	APPROVED BY DATE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		ANGULAR ± 3 °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3			

9 8 7 6 5 4 3 2 1