


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1 | 50-00385 | Connector, dc plug, 2.35x0.7xL22 mm, EIAJ-1, molding style, spring contacts, yellow insulator | 1 | |
| 2 | 30-00003 | Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A | 1 | |
| 3 | 24-00074 | Overmold, PVC, black | 1 | |

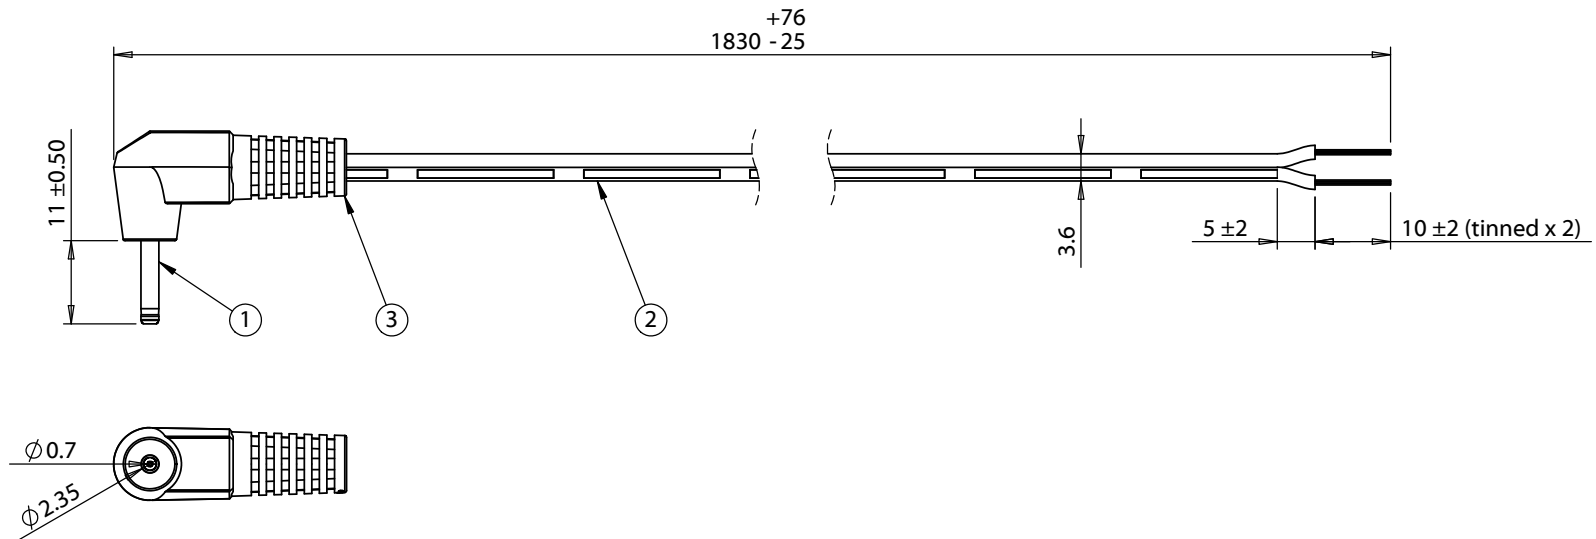

| Wiring Diagram | |
|----------------|-------------------|
| 50-00385 | wire color |
| center | black with stripe |
| sleeve | black |

Notes:

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

| | | | | | |
|------------|-----------|--|---|--|--|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 1/19/2009 | Re-issue CUI spec as Tensility | GL 2016.03.15 16:46:59 -07'00' | RoHS compliant | |
| A1 | 8/31/2011 | Updated description, connector, and wire information | Verified: LA <small>Digitally signed by LA, DN: cn=LA, o=Tensility, email=LA@tensility.com, c=US, Date: 2016.05.05 16:55:11 -0700</small> | Function test: no open, no short circuit, no intermittent | |
| A2 | 6/14/2012 | Updated connector description | Dimensions are in millimeters. | Description: | |
| A3 | 10/9/2013 | Changed connector to 50-00385 | Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Cable, 1830 mm, 2.35x0.7x11 mm, 90° 50-00385 dc plug to stripped tinned, 24 AWG, 30-00003 wire | |
| Scale: 1:1 | | Part number: 053-0195R (CA-2196) | | Sheet 1 of 1 | |