

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

**MATERIAL**

Stator, rotor, closing lever and nut (M22x1.5) in glass-fibre reinforced polyamide based (PA) technopolymer certified self-extinguish UL-94 V0, black colour, matte finish.

**PACKING RING**

SBR rubber.

**INTERNAL TOOTHED WASHER**

AISI 304 stainless steel

**SELF-TAPPING SCREW**

AISI 304 stainless steel

**KEY**

Polyamide based (PA) technopolymer.

**ROTATION**

90°.

**IP PROTECTION**

IP 65 protection class according to EN 60529 (see page A-18).

**STANDARD EXECUTIONS**

- **CQT/A**: mark for two-wings key.
- **CQT/T**: mark for triangular key.

**TECHNICAL DATA**


The "V0" certification in accordance with UL-94 V (Underwriters Laboratories) (see Technical data on page A-5) indicates that on a plastic test sample with specific shape and dimensions, in the vertical position, the flame is extinguished within 10 seconds, without generating incandescent drops.

**SPECIAL EXECUTIONS ON REQUEST**

- Cylindrical body of the closing lever in other dimensions.
- Latches and keys supplied separately.




Drilling template



**CQT/A**

**CQT/T**

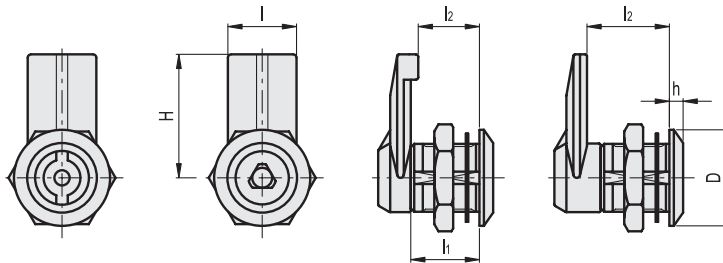

Conversion Table 1 mm = 0.039 inch			
H		l2	
mm	inch	mm	inch
32	1.26	18	0.71
		20	0.79
		24	0.94
		32	1.26

**CQT/A**

Code	Description	D	H	l	l1	l2	h	$\Delta\Delta$
421393	CQT/A-32-18 AE-V0	28	32	20	20	18	4	20
421391	CQT/A-32-20 AE-V0	28	32	20	20	20	4	20
421395	CQT/A-32-24 AE-V0	28	32	20	20	24	4	21
421397	CQT/A-32-32 AE-V0	28	32	20	20	32	4	23

**CQT/T**

Code	Description	D	H	l	l1	l2	h	$\Delta\Delta$
421403	CQT/T-32-18 AE-V0	28	32	20	20	18	4	20
421401	CQT/T-32-20 AE-V0	28	32	20	20	20	4	20
421405	CQT/T-32-24 AE-V0	28	32	20	20	24	4	21
421407	CQT/T-32-32 AE-V0	28	32	20	20	32	4	23