


CTDA13AF Series

From 10 μ H to 33 μ H

SPECIFICATIONS


Parts are available in $\pm 20\%$ inductance tolerance only.
 *Rated D.C. Current: Inductance drift is within -25% at the superposition.
 **Allowable Current: A rise in temp. of surface core within 40°C.

Part Number	Inductance (μ H $\pm 20\%$)	L Test Freq. (kHz)	DCR Max. (m Ω)	*Rated DC Current (A)	**Allowable DC Current (A)
CTDA13AF-100M	10	1.0	5.4	6.0	8.0
CTDA13AF-150M	15	1.0	6.8	5.0	7.5
CTDA13AF-220M	22	1.0	8.1	4.2	7.0
CTDA13AF-270M	27	1.0	13.5	3.8	5.6
CTDA13AF-330M	33	1.0	14.7	3.4	5.3

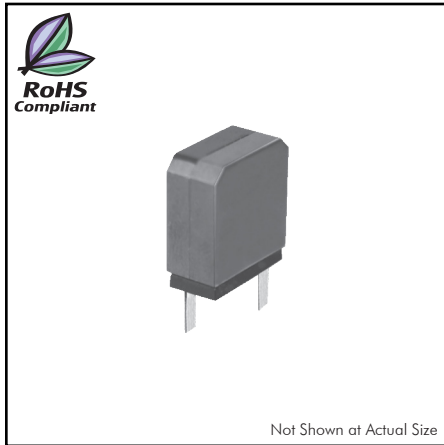

PHYSICAL DIMENSIONS

Size	A	B	C	D	E	F
	Max.				Max.	
mm	15.0	13.0 ± 0.5	5.0 ± 1.0	1.8 ± 0.5	1.0	8.4 ± 0.5
inches	0.59	0.51 ± 0.02	0.2 ± 0.039	0.071 ± 0.02	0.039	0.33 ± 0.02

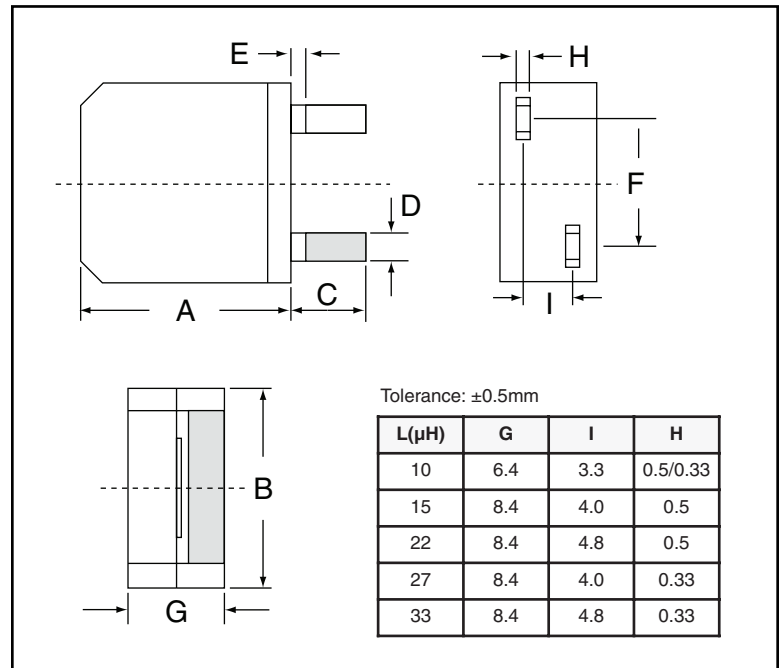

CHARACTERISTICS

Description: Inductor for digital amplifier LPF
Applications: Suitable as choke for digital amplifier. Audio, DVD 5.1ch home theater, AV amplifier, LCD, PDP. Usable as a choke coil for power supplies, etc.
Features: Compact and low-profile. Output 85W. Magnetically shielded structure and low DC resistance. High sound quality. Low electromagnetic interface. Low resistance and high current.
Inductance Tolerance: $\pm 20\%$
Testing: Tested on a HP4284A at 1.0kHz
Packaging: Bulk
Marking: Parts are marked with inductance code
Miscellaneous: RoHS Compliant
Additional Information: Additional electrical & physical information available upon request
Samples available. See website for ordering information.