
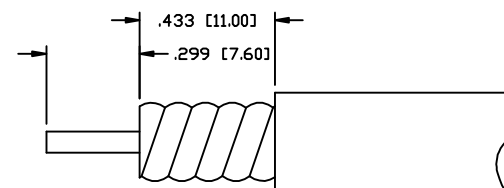



PART NO.

**RFN-1009-HPL**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	03/09/15	JDMc

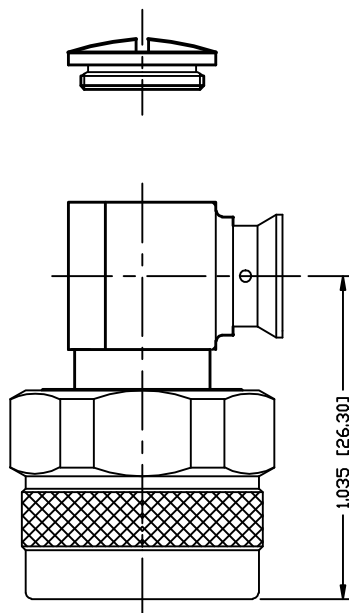

TIMES MICROWAVE CABLE: SPP-250-LLP

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

VSWR: &lt;1.15:1 THRU 3GHz

PIM: ≤-155 dBc

DIELECTRIC WITHSTANDING VOLTAGE: 1500V/AC

INSULATION RESISTANCE: 5000 Mega Ohms

TEMPERATURE RANGE: -40°C TO 155°C

MECHANICAL DURABILITY: 500 CYCLES

RoHS COMPLIANT

TIMES MICROWAVE CABLE: SPP-250-LLP

9	COUPLING NUT	1	BRASS	WHITE BRONZE
8	END CAP	1	BRASS	WHITE BRONZE
7	GASKET	1	SILICONE	----
6	RETAINING RING	1	BeCu	WHITE BRONZE
5	SPACER DISC	1	PTFE	----
4	SOLDER BODY	1	BRASS	WHITE BRONZE
3	PIN	1	BRASS	SILVER
2	INSULATOR	1	PTFE	----
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]

DRAWN	JDM	9/9/15
CHECKED		
ORJ DRAWN	C. ZUNIGA	03/09/15

PROPRIETARY AND CONFIDENTIAL  
THIS DRAWING CONTAINS  
INFORMATION PROPRIETARY TO  
RF INDUSTRIES. ANY  
UNAUTHORIZED USE OF THIS  
DRAWING IS EXPRESSLY  
PROHIBITED WITHOUT WRITTEN  
PERMISSION FROM RF  
INDUSTRIES. ANY VIOLATION IS  
PUNISHABLE UNDER U.S.  
COPYRIGHT LAWS.

**RFconnectors**  
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.  
SAN DIEGO, CA 92126  
(858) 549-6340  
(858) 549-6345 FAX

**N PLUG, 90°**  
**DIRECT SOLDER FOR SPP-250-LLPL**

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	<b>RFN-1009-HPL</b>	—
SCALE:	ENGINEERING ID:		
NTS	1787		

SHEET 1 OF 1