

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A0700ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES

- Small size: 1206
- Frequency: 700MHz
- Sharp attenuation slope
- Characteristic impedance: 50Ω
- Operating/Storage temp: -40°C – +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours


#### TERMINATION

Nickel/ Lead free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### HOW TO ORDER

**LP**   **1206**   **A**   **0700**   **A**   **S**   **TR**  
 Series   Size   Type   Frequency (MHz)   Sub-Type   Termination   Taped & Reeled


#### DIMENSIONS (TOP VIEW)

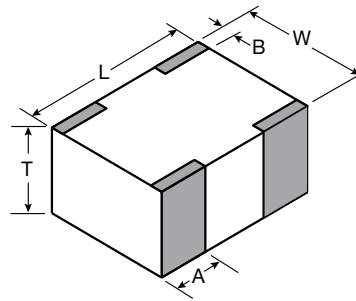


mm (inches)

L	3.08±0.1 (0.121±0.004)
W	1.60±0.1 (0.063±0.004)
T	0.87±0.1 (0.034±0.004)
A	0.61±0.25 (0.028±0.010)
B	0.35±0.15 (0.014±0.006)

#### TERMINAL AND LAYOUT (TOP VIEW)

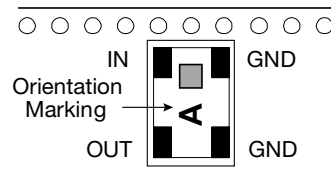

#### RECOMMENDED PAD LAYOUT

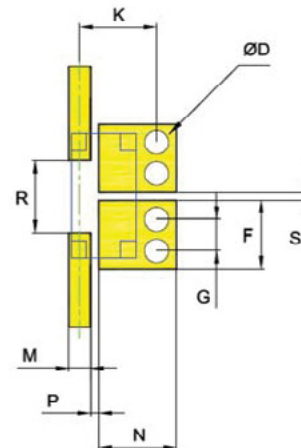

mm (inches)

F	1.70±0.05 (0.067±0.002)
G	0.78±0.05 (0.031±0.002)
K	1.91±0.10 (0.075±0.004)
M	0.54±0.025 (0.021±0.001)
N	1.93±0.05 (0.076±0.002)
P	0.21±0.04 (0.008±0.002)
R	1.80±0.04 (0.071±0.002)
S	0.20±0.04 (0.008±0.002)
D	0.60±0.10 (0.024±0.004)

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W


### LP1206A0700ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 700MHz	R.Loss @ 700MHz	Attenuation
LP1206A0700ASTR	0.8dB max.	-20dB	-20dB at 980MHz -45dB at 1400MHz -45dB at 2100MHz -30dB at 2800MHz

#### TYPICAL ELECTRICAL PERFORMANCE

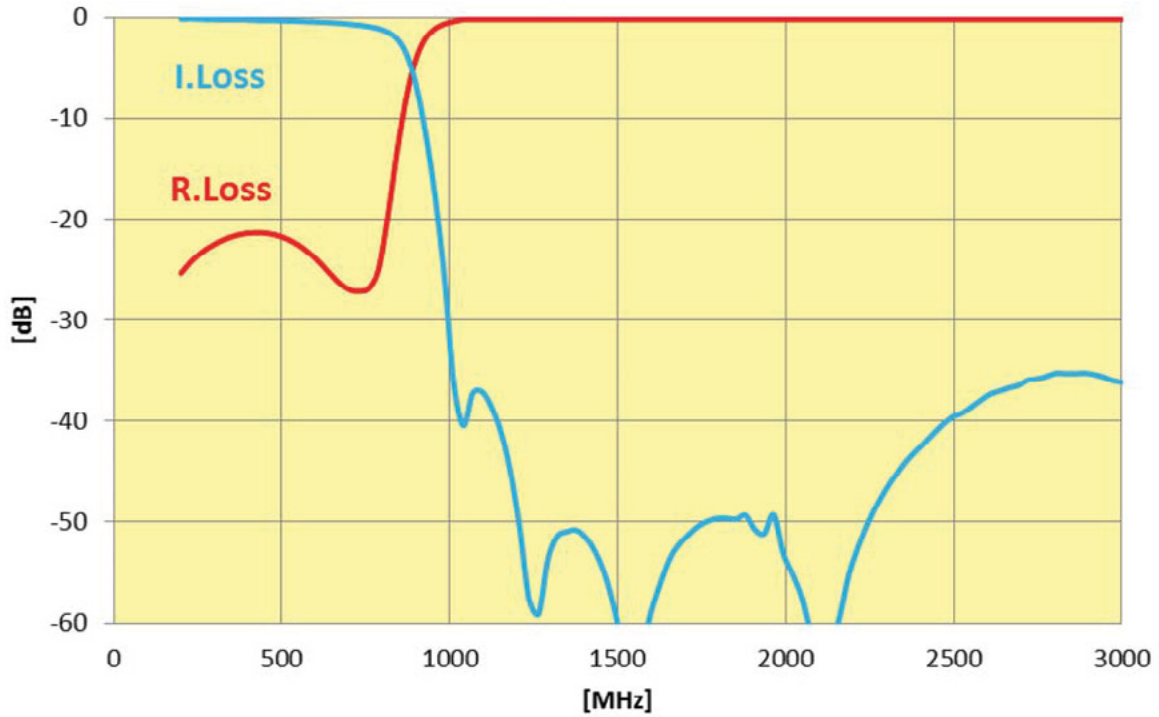

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A0860ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES

- Small size: 1206
- Frequency: 860MHz
- Sharp attenuation slope
- Characteristic impedance: 50ohm
- Operating/Storage temp: -40°C – +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours


#### TERMINATION

Nickel/ Lead free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### HOW TO ORDER

<b>LP</b>	<b>1206</b>	<b>A</b>	<b>0860</b>	<b>A</b>	<b>S</b>	<b>TR</b>
Series	Size	Type	Frequency (MHz)	Sub-Type	Termination	Taped & Reeled


#### DIMENSIONS (TOP VIEW)

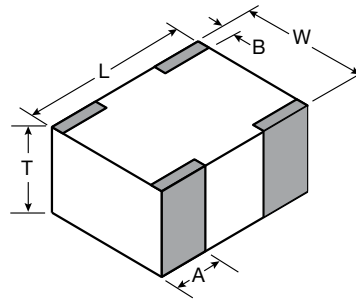


#### mm (inches)

<b>L</b>	3.08±0.1 (0.121±0.004)
<b>W</b>	1.60±0.1 (0.063±0.004)
<b>T</b>	0.87±0.1 (0.034±0.004)
<b>A</b>	0.61±0.25 (0.028±0.010)
<b>B</b>	0.35±0.15 (0.014±0.006)

#### TERMINAL AND LAYOUT (TOP VIEW)

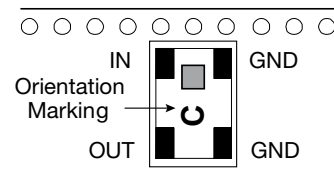

#### RECOMMENDED PAD LAYOUT

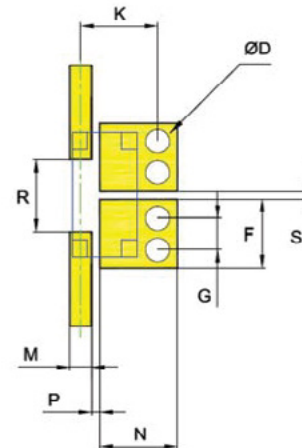

#### mm (inches)

<b>F</b>	1.70±0.05 (0.067±0.002)
<b>G</b>	0.78±0.05 (0.031±0.002)
<b>K</b>	1.91±0.10 (0.075±0.004)
<b>M</b>	0.54±0.025 (0.021±0.001)
<b>N</b>	1.93±0.05 (0.076±0.002)
<b>P</b>	0.21±0.04 (0.008±0.002)
<b>R</b>	1.80±0.04 (0.071±0.002)
<b>S</b>	0.20±0.04 (0.008±0.002)
<b>D</b>	0.60±0.10 (0.024±0.004)

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W


### LP1206A0860ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 860MHz	R.Loss @ 860MHz	Attenuation
LP1206A0860ASTR	0.85dB max.	-18dB	-25dB at 1204MHz -45dB at 1720MHz -45dB at 2580MHz -30dB at 3440MHz

#### TYPICAL ELECTRICAL PERFORMANCE

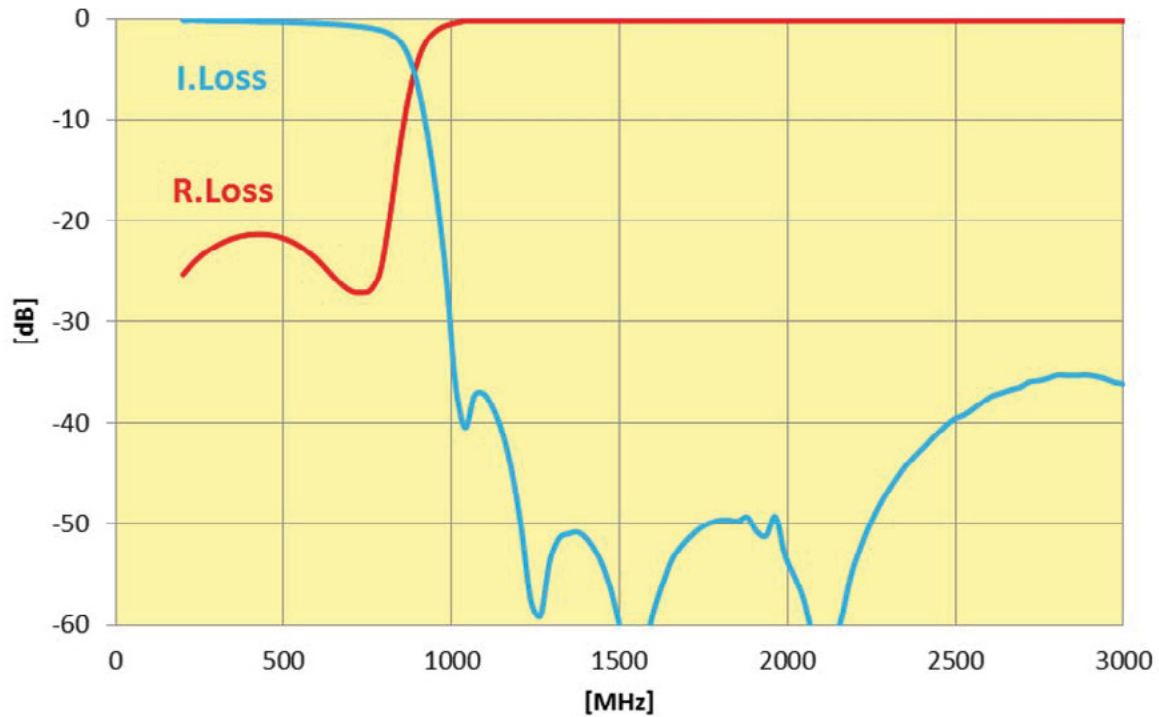

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A1000ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES:

- Small size: 1206
- Frequency: 1000MHz
- Sharp attenuation slope
- Characteristic impedance: 50Ω
- Operating / Storage temp: -40°C ÷ +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours


#### TERMINATION:

Nickel/ Lead-Free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### PART NUMBER CODE:

LP 1206 A XXXX ASTR  
Frequency  
(MHz)


#### DIMENSIONS

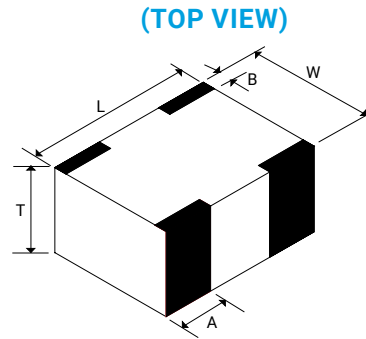


mm (inches)

L	3.08±0.1 (0.121±0.004)
W	1.60±0.1 (0.063±0.004)
T	0.87±0.1 (0.034±0.004)
A	0.61±0.25 (0.028±0.010)
B	0.35±0.15 (0.014±0.006)

#### TERMINALS (TOP VIEW)

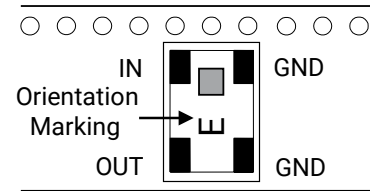

#### RECOMMENDED PAD LAYOUT

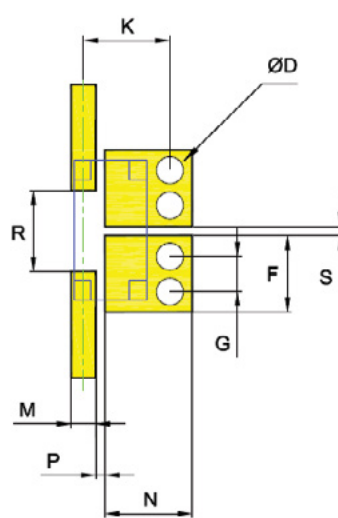

(mm)


F	1.70±0.05
G	0.78±0.05
K	1.91±0.10
M	0.54±0.025
N	1.93±0.05
P	0.21±0.04
R	1.80±0.04
S	0.20±0.04
D	0.6±0.1

**Thin-Film RF/Microwave Filters**  
**1206 High Performance Low Pass 8W**  
**LP1206A1000ASTR – SMD Termination**



**ELECTRICAL CHARACTERISTICS**

P/N	I.Loss @ 1000MHz	R.Loss @ 1000MHz	ATTENUATION [min.]
LP1206A1000ASTR	0.7dB max.	-15dB	-30dB at 1500-2000MHz -25dB at 2000-3000MHz -25dB at 3000-4000MHz

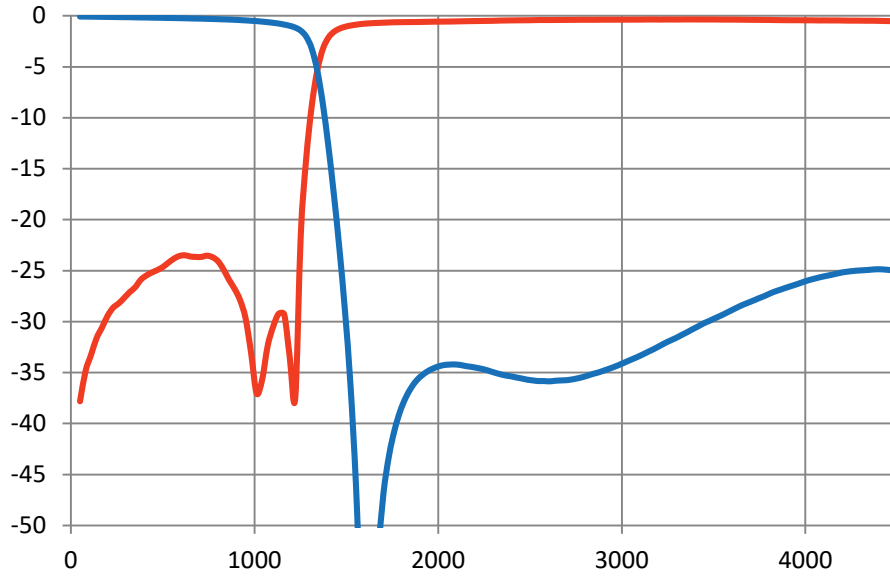

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A1100ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES:

- Small size: 1206
- Frequency: 1100MHz
- Sharp attenuation slope
- Characteristic impedance: 50Ω
- Operating / Storage temp: -40°C ÷ +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours


#### TERMINATION:

Nickel/ Lead-Free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### PART NUMBER CODE:

LP 1206 A XXXX ASTR  
Frequency  
(MHz)


#### DIMENSIONS

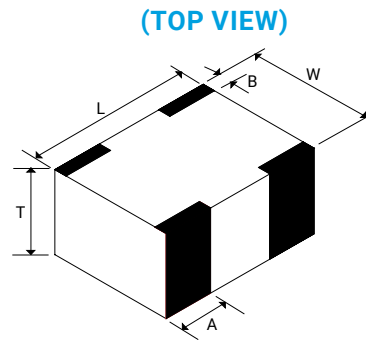


mm (inches)

L	3.08±0.1 (0.121±0.004)
W	1.60±0.1 (0.063±0.004)
T	0.87±0.1 (0.034±0.004)
A	0.61±0.25 (0.028±0.010)
B	0.35±0.15 (0.014±0.006)

#### TERMINALS (TOP VIEW)

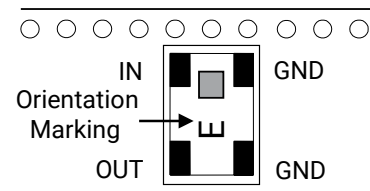

#### RECOMMENDED PAD LAYOUT

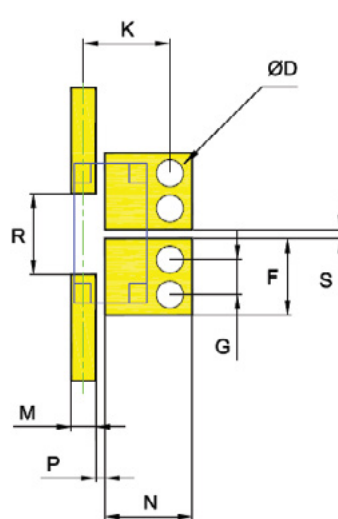

(mm)

F	1.70±0.05
G	0.78±0.05
K	1.91±0.10
M	0.54±0.025
N	1.93±0.05
P	0.21±0.04
R	1.80±0.04
S	0.20±0.04
D	0.6±0.1

# Thin-Film RF/Microwave Filters


## 1206 High Performance Low Pass 8W

### LP1206A1100ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 1100MHz	R.Loss @ 1100MHz	ATTENUATION [min.]
LP1206A1100ASTR	0.8dB max.	-15dB	-30dB at 2000-4000MHz

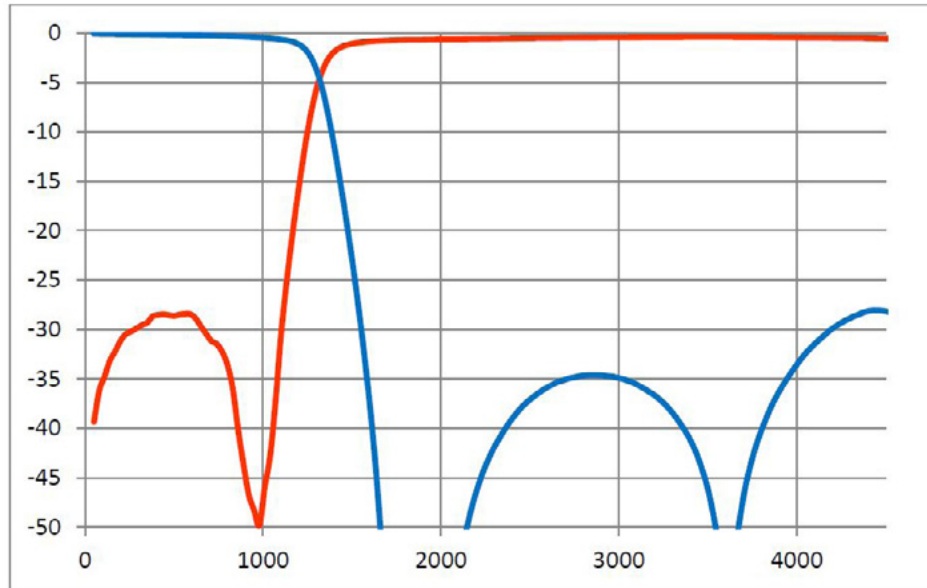



# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A1500ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES:

- Small size: 1206
- Frequency: 1500MHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating / Storage temp: -40°C ÷ +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours


#### TERMINATION:

Nickel/ Lead-Free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### PART NUMBER CODE:

LP 1206 A XXXX ASTR  
Frequency  
(MHz)


#### DIMENSIONS (TOP VIEW)

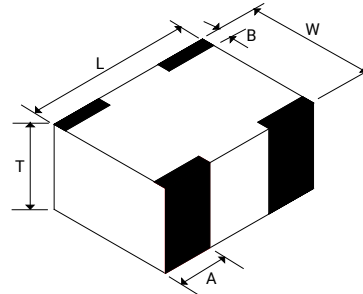


mm (inches)

<b>L</b>	3.08±0.1 (0.121±0.004)
<b>W</b>	1.60±0.1 (0.063±0.004)
<b>T</b>	0.87±0.1 (0.034±0.004)
<b>A</b>	0.61±0.25 (0.028±0.010)
<b>B</b>	0.35±0.15 (0.014±0.006)

#### TERMINALS (TOP VIEW)

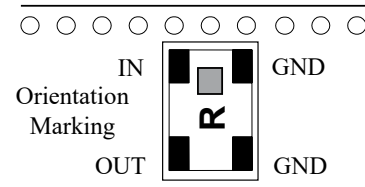

#### RECOMMENDED PAD LAYOUT

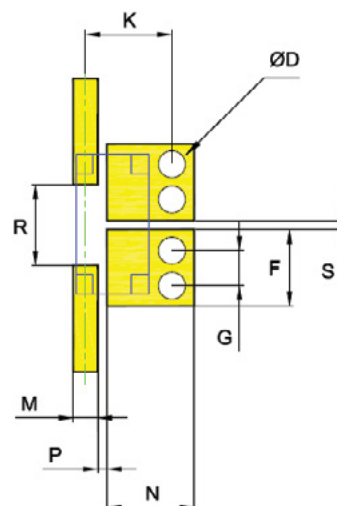

(mm)

<b>F</b>	1.70±0.05
<b>G</b>	0.78±0.05
<b>K</b>	1.91±0.10
<b>M</b>	0.54±0.025
<b>N</b>	1.93±0.05
<b>P</b>	0.21±0.04
<b>R</b>	1.80±0.04
<b>S</b>	0.20±0.04
<b>D</b>	0.6±0.1

# Thin-Film RF/Microwave Filters


## 1206 High Performance Low Pass 8W

### LP1206A1500ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 1500MHz	R.Loss @ 1500MHz	ATTENUATION [min.]
LP1206A1500ASTR	0.8dB max.	-15dB	-30dB at 2000-3000MHz -25dB at 3000-4000MHz -20dB at 4500-6000MHz

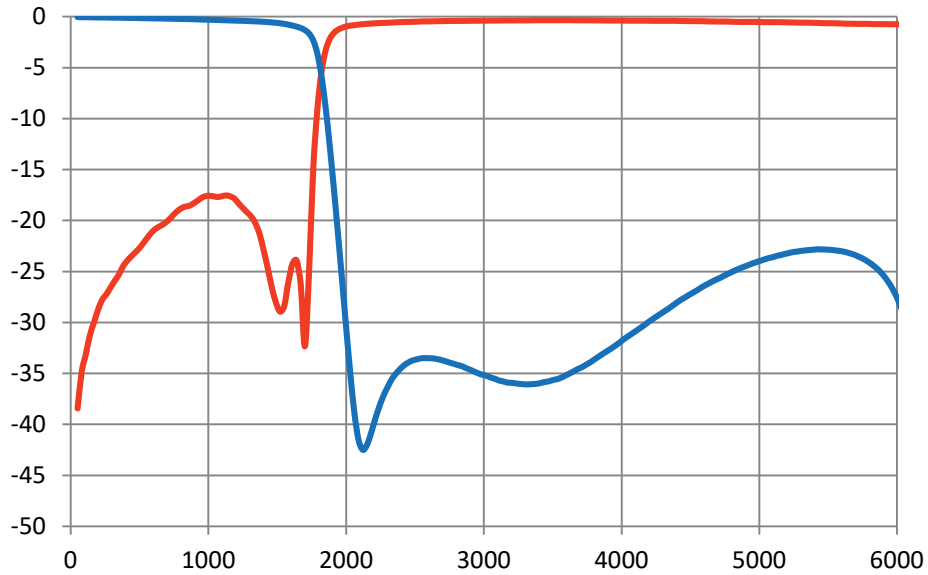

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A1600ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES:

- Small size: 1206
- Frequency: 1600MHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating / Storage temp: -40°C ÷ +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours


#### TERMINATION:

Nickel/ Lead-Free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### PART NUMBER CODE:

LP 1206 A XXXX ASTR  
Frequency  
(MHz)


#### DIMENSIONS (TOP VIEW)

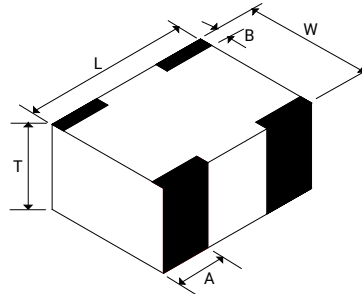


mm (inches)

<b>L</b>	3.08±0.1 (0.121±0.004)
<b>W</b>	1.60±0.1 (0.063±0.004)
<b>T</b>	0.87±0.1 (0.034±0.004)
<b>A</b>	0.61±0.25 (0.028±0.010)
<b>B</b>	0.35±0.15 (0.014±0.006)

#### TERMINALS (TOP VIEW)

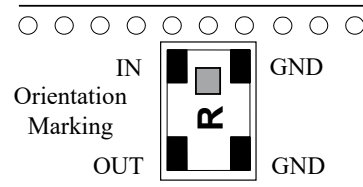

#### RECOMMENDED PAD LAYOUT

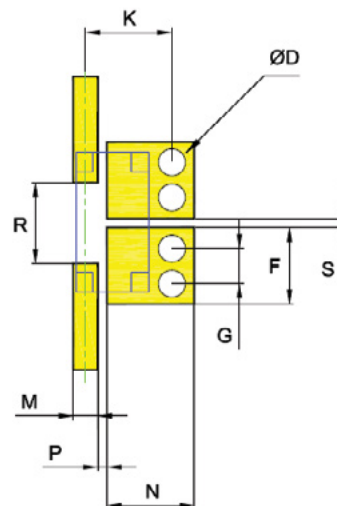

(mm)

<b>F</b>	1.70±0.05
<b>G</b>	0.78±0.05
<b>K</b>	1.91±0.10
<b>M</b>	0.54±0.025
<b>N</b>	1.93±0.05
<b>P</b>	0.21±0.04
<b>R</b>	1.80±0.04
<b>S</b>	0.20±0.04
<b>D</b>	0.6±0.1

# Thin-Film RF/Microwave Filters


## 1206 High Performance Low Pass 8W

### LP1206A1600ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 1600MHz	R.Loss @ 1600MHz	ATTENUATION [min.]
LP1206A1600ASTR	0.8dB max.	-15dB	-30dB at 2200-4000MHz -20dB at 4001-6000MHz

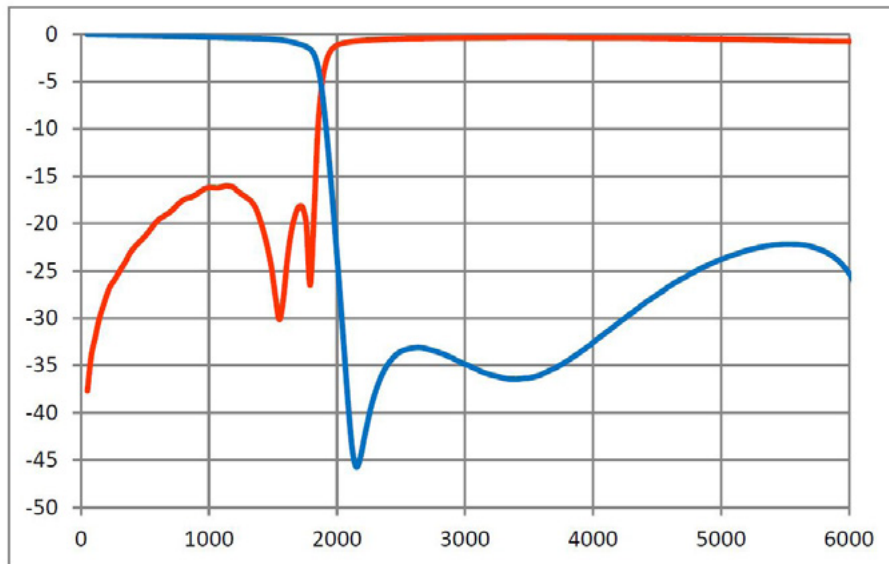

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A2000ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES:

- Small size: 1206
- Frequency: 2000MHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating / Storage temp: -40°C ÷ +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours

#### TERMINATION:


Nickel/ Lead-Free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### PART NUMBER CODE:

LP 1206 A XXXX ASTR  
 Frequency  
 (MHz)

#### DIMENSIONS


(TOP VIEW)

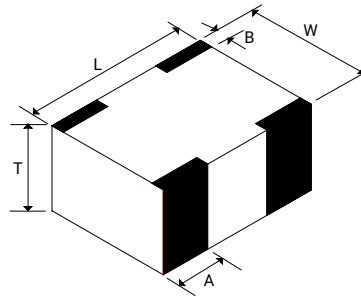


mm (inches)

L	3.08±0.1 (0.121±0.004)
W	1.60±0.1 (0.063±0.004)
T	0.87±0.1 (0.034±0.004)
A	0.61±0.25 (0.028±0.010)
B	0.35±0.15 (0.014±0.006)

#### TERMINALS (TOP VIEW)

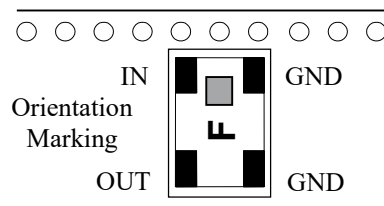

#### RECOMMENDED PAD LAYOUT

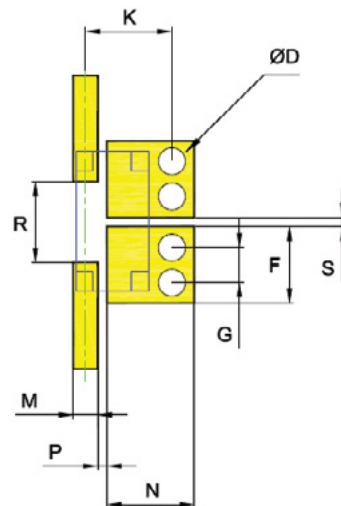

(mm)

F	1.70±0.05
G	0.78±0.05
K	1.91±0.10
M	0.54±0.025
N	1.93±0.05
P	0.21±0.04
R	1.80±0.04
S	0.20±0.04
D	0.6±0.1

# Thin-Film RF/Microwave Filters


## 1206 High Performance Low Pass 8W

### LP1206A2000ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 2000MHz	R.Loss @ 2000MHz	ATTENUATION [min.]
LP1206A2000ASTR	0.7dB max.	-15dB	-27dB at 3000-4000MHz -25dB at 4000-6000MHz -20dB at 6000-8000MHz

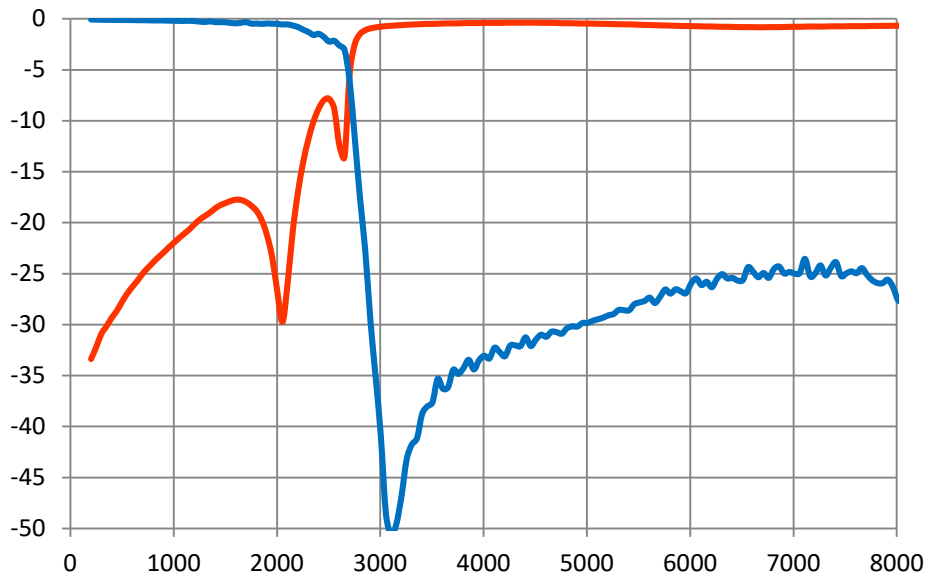

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A2500ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES:

- Small size: 1206
- Frequency: 2500MHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating / Storage temp: -40°C ÷ +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours

#### TERMINATION:


Nickel/ Lead-Free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### PART NUMBER CODE:

LP 1206 A XXXX ASTR  
Frequency  
(MHz)

#### DIMENSIONS


##### (TOP VIEW)

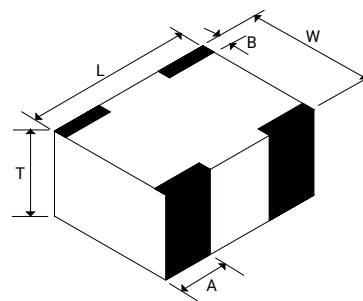


mm (inches)

<b>L</b>	3.08±0.1 (0.121±0.004)
<b>W</b>	1.60±0.1 (0.063±0.004)
<b>T</b>	0.87±0.1 (0.034±0.004)
<b>A</b>	0.61±0.25 (0.028±0.010)
<b>B</b>	0.35±0.15 (0.014±0.006)

#### TERMINALS AND LAYOUT (TOP VIEW)

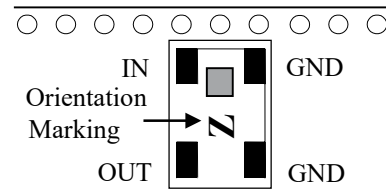

#### RECOMMENDED PAD LAYOUT

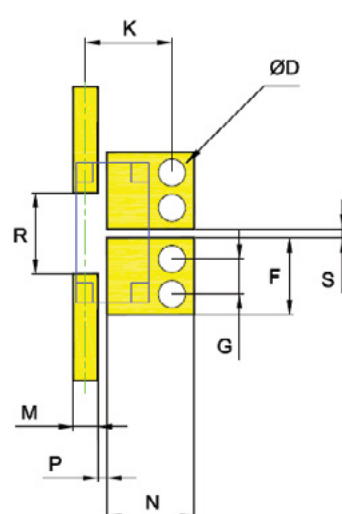

(mm)


<b>F</b>	1.70±0.05
<b>G</b>	0.78±0.05
<b>K</b>	1.91±0.10
<b>M</b>	0.54±0.025
<b>N</b>	1.93±0.05
<b>P</b>	0.21±0.04
<b>R</b>	1.80±0.04
<b>S</b>	0.20±0.04
<b>D</b>	0.6±0.1

**Thin-Film RF/Microwave Filters**  
**1206 High Performance Low Pass 8W**  
**LP1206A2500ASTR – SMD Termination**



**ELECTRICAL CHARACTERISTICS**

P/N	I.Loss @ 2500MHz	R.Loss @ 2500MHz	ATTENUATION [min.]
LP1206A2500ASTR	0.7dB max.	-15dB	-25dB at 4000-5000MHz -22dB at 5000-7500MHz -15dB at 7500-8500MHz

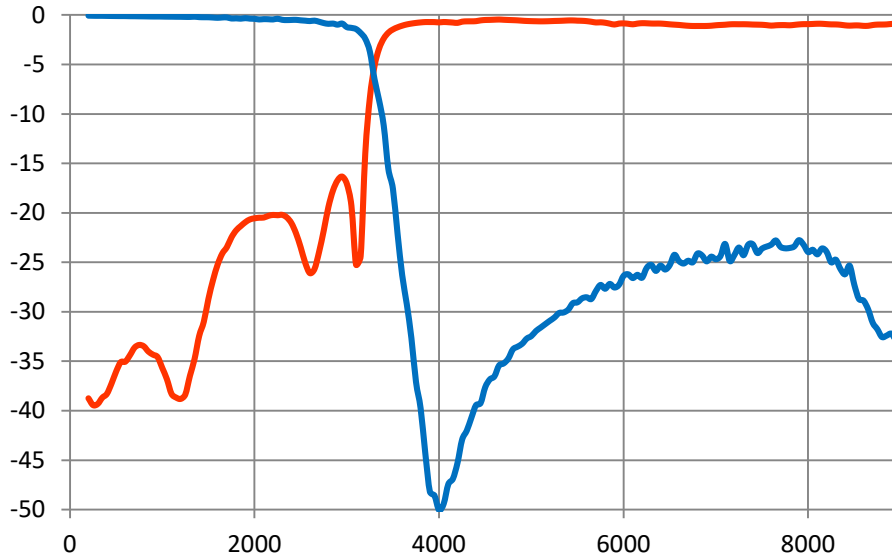



# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A2600ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES:

- Small size: 1206
- Frequency: 2600MHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating / Storage temp: -40°C ÷ +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours

#### TERMINATION:


Nickel/ Lead-Free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### PART NUMBER CODE:

LP 1206 A XXXX ASTR  
Frequency  
(MHz)

#### DIMENSIONS


##### (TOP VIEW)

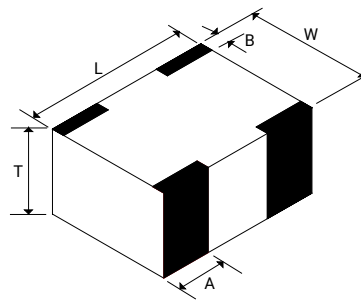


mm (inches)

<b>L</b>	3.08±0.1 (0.121±0.004)
<b>W</b>	1.60±0.1 (0.063±0.004)
<b>T</b>	0.87±0.1 (0.034±0.004)
<b>A</b>	0.61±0.25 (0.028±0.010)
<b>B</b>	0.35±0.15 (0.014±0.006)

#### TERMINALS AND LAYOUT (TOP VIEW)

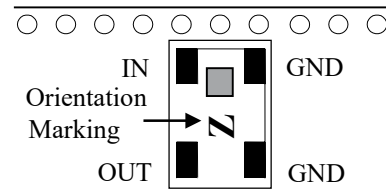

#### RECOMMENDED PAD LAYOUT

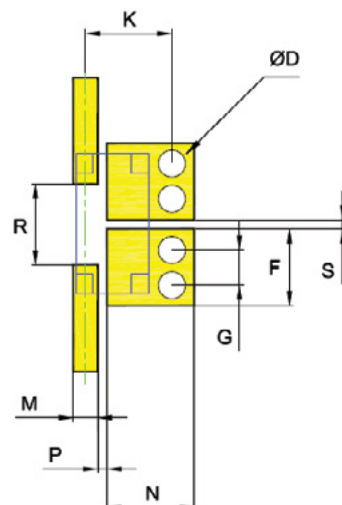

(mm)


<b>F</b>	1.70±0.05
<b>G</b>	0.78±0.05
<b>K</b>	1.91±0.10
<b>M</b>	0.54±0.025
<b>N</b>	1.93±0.05
<b>P</b>	0.21±0.04
<b>R</b>	1.80±0.04
<b>S</b>	0.20±0.04
<b>D</b>	0.6±0.1

**Thin-Film RF/Microwave Filters**  
**1206 High Performance Low Pass 8W**  
**LP1206A2600ASTR – SMD Termination**



**ELECTRICAL CHARACTERISTICS**

P/N	I.Loss @ 2600MHz	R.Loss @ 2600MHz	ATTENUATION [min.]
LP1206A2600ASTR	0.7dB max.	-15dB	-25dB at 4000-6000MHz -18dB at 6001-8000MHz

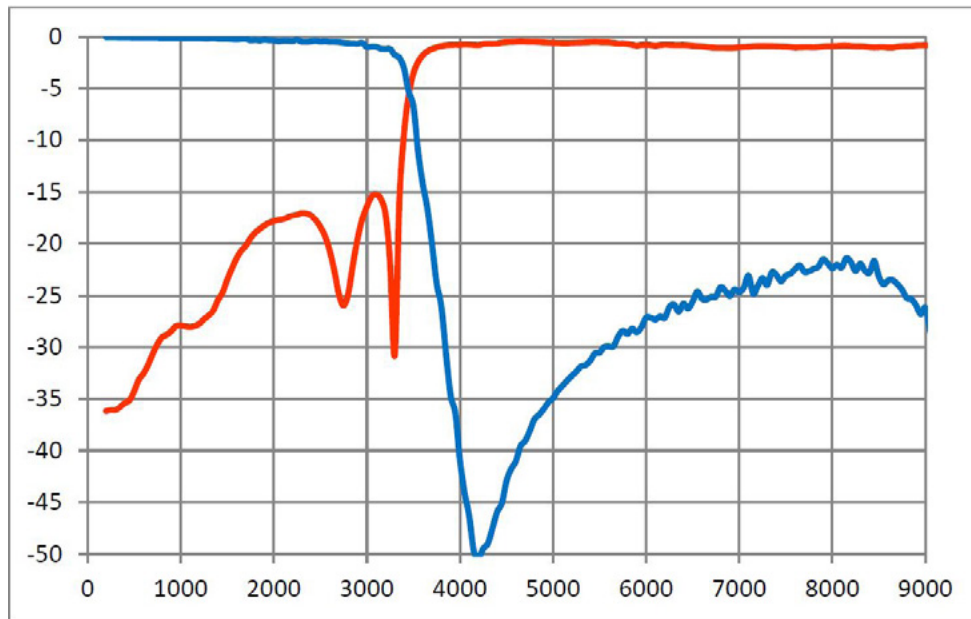

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A3200ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES

- Small size: 1206
- Frequency: 3.2GHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating/Storage temp: -40°C – +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours


#### TERMINATION

Nickel/ Lead free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### HOW TO ORDER

<b>LP</b>	<b>1206</b>	<b>A</b>	<b>3200</b>	<b>A</b>	<b>S</b>	<b>TR</b>
Series	Size	Type	Frequency (MHz)	Sub-Type	Termination	Taped & Reeled


#### DIMENSIONS (TOP VIEW)

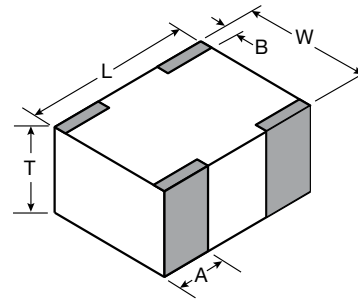


mm (inches)

<b>L</b>	3.08±0.1 (0.121±0.004)
<b>W</b>	1.60±0.1 (0.063±0.004)
<b>T</b>	0.87±0.1 (0.034±0.004)
<b>A</b>	0.61±0.25 (0.028±0.010)
<b>B</b>	0.35±0.15 (0.014±0.006)

#### TERMINAL AND LAYOUT (TOP VIEW)

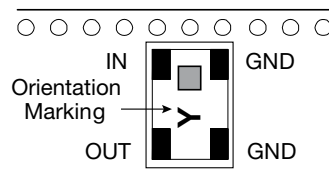

#### RECOMMENDED PAD LAYOUT

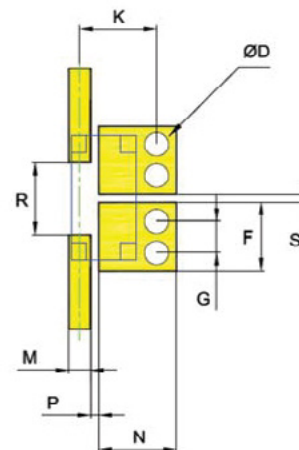

mm (inches)

<b>F</b>	1.70±0.05 (0.067±0.002)
<b>G</b>	0.78±0.05 (0.031±0.002)
<b>K</b>	1.91±0.10 (0.075±0.004)
<b>M</b>	0.54±0.025 (0.021±0.001)
<b>N</b>	1.93±0.05 (0.076±0.002)
<b>P</b>	0.21±0.04 (0.008±0.002)
<b>R</b>	1.80±0.04 (0.071±0.002)
<b>S</b>	0.20±0.04 (0.008±0.002)
<b>D</b>	0.60±0.10 (0.024±0.004)

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W


### LP1206A3200ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 3.2GHz	R.Loss @ 3.2GHz	Attenuation
LP1206A3200ASTR	0.85dB max.	-20dB	-30dB at 4.48GHz -40dB at 6.4GHz -25dB at 9.6GHz -25dB at 10GHz

#### TYPICAL ELECTRICAL PERFORMANCE

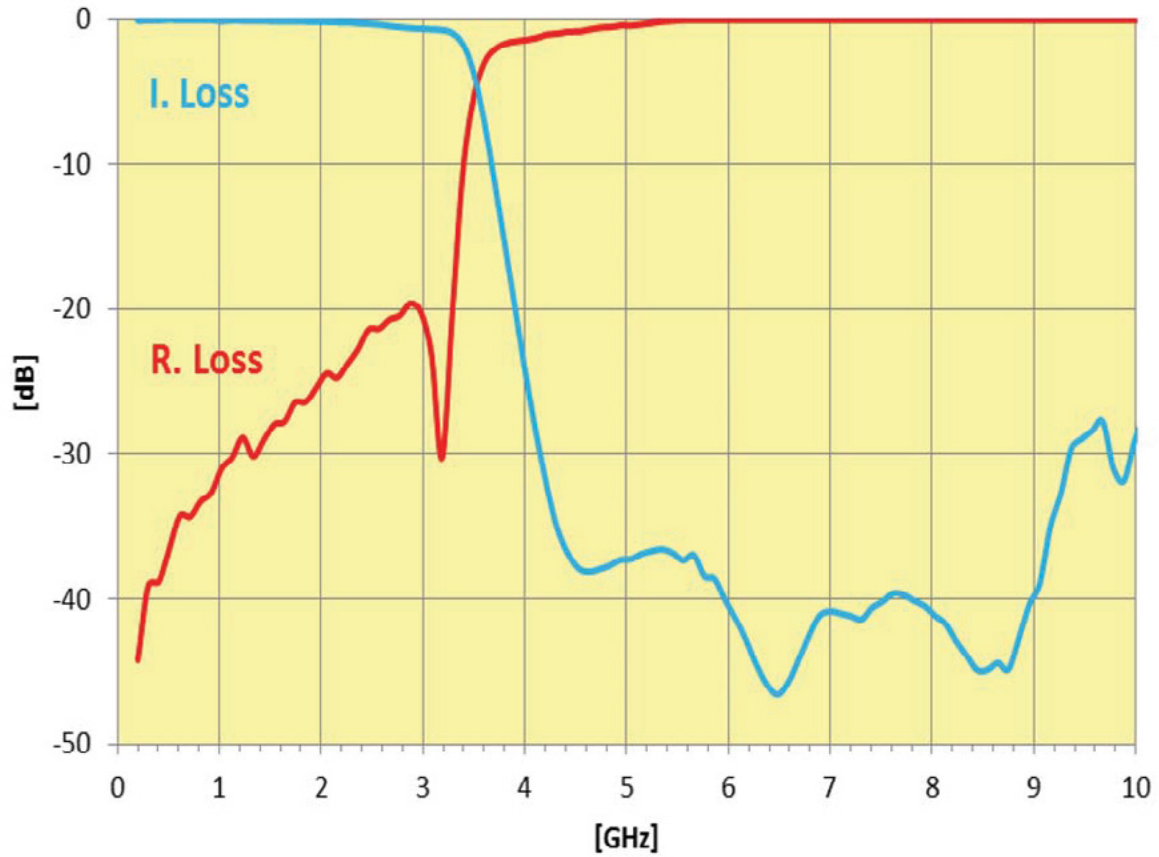

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A3500ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly. The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES

- Small size: 1206
- Frequency: 3.5GHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating/Storage temp: -40°C – +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION


Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours


#### TERMINATION

Nickel/ Lead free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### HOW TO ORDER

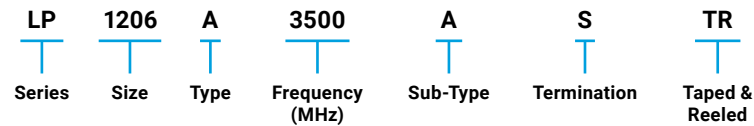


#### DIMENSIONS (TOP VIEW)

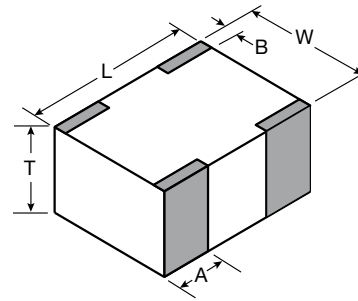


mm (inches)

L	3.08±0.1 (0.121±0.004)
W	1.60±0.1 (0.063±0.004)
T	0.87±0.1 (0.034±0.004)
A	0.61±0.25 (0.028±0.010)
B	0.35±0.15 (0.014±0.006)

#### TERMINAL AND LAYOUT (TOP VIEW)

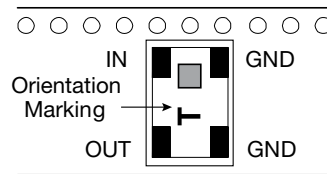

#### RECOMMENDED PAD LAYOUT

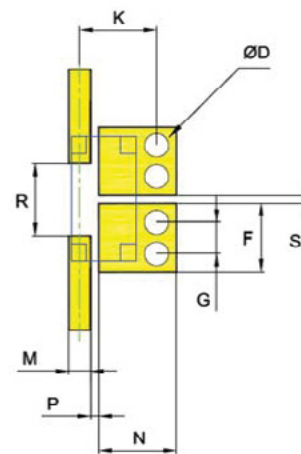

mm (inches)

F	1.70±0.05 (0.067±0.002)
G	0.78±0.05 (0.031±0.002)
K	1.91±0.10 (0.075±0.004)
M	0.54±0.025 (0.021±0.001)
N	1.93±0.05 (0.076±0.002)
P	0.21±0.04 (0.008±0.002)
R	1.80±0.04 (0.071±0.002)
S	0.20±0.04 (0.008±0.002)
D	0.60±0.10 (0.024±0.004)

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W


### LP1206A3500ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 3.5GHz	R.Loss @ 3.5GHz	Attenuation
LP1206A3500ASTR	0.7dB max.	-18dB	-30dB at 4.9GHz -40dB at 7GHz -25dB at 10.5GHz -15dB at 11GHz

#### TYPICAL ELECTRICAL PERFORMANCE

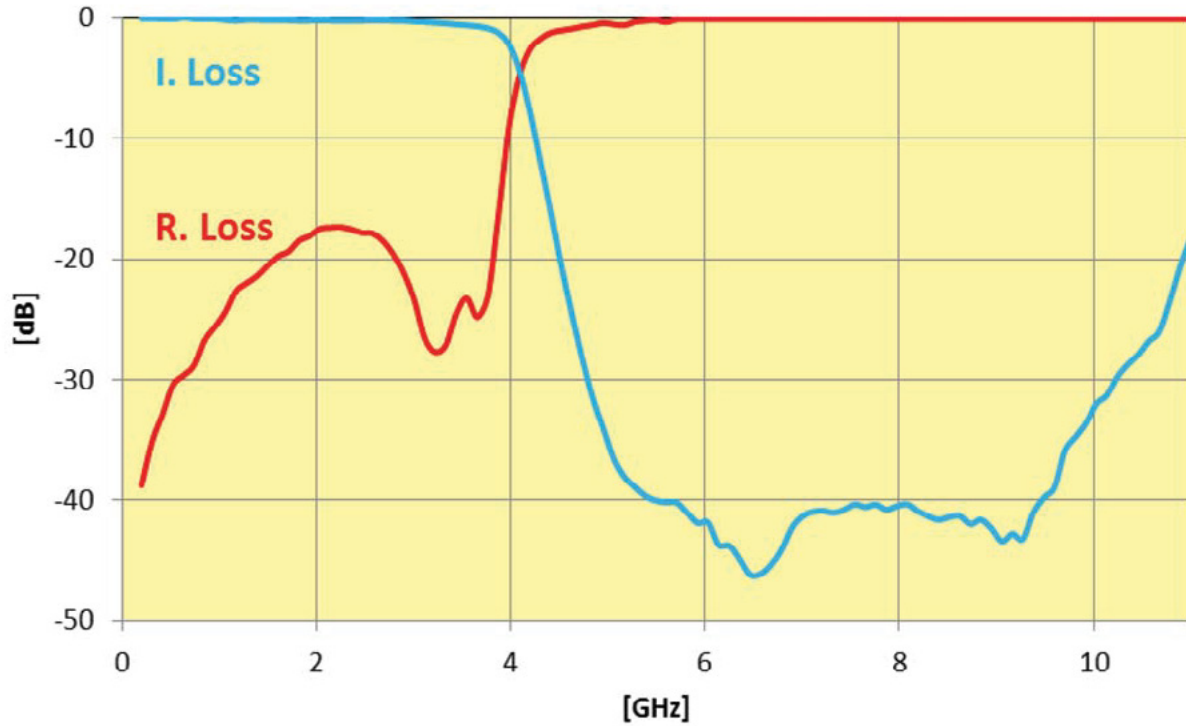

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A3600ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly. The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### FEATURES

- Small size: 1206
- Frequency: 3.6GHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating/Storage temp: -40°C – +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### FINAL QUALITY INSPECTION

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours

#### TERMINATION


Nickel/ Lead free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### HOW TO ORDER

**LP** | **1206** | **A** | **3600** | **A** | **S** | **TR**  
 Series | Size | Type | Frequency (MHz) | Sub-Type | Termination | Taped & Reeled

#### DIMENSIONS


##### (TOP VIEW)

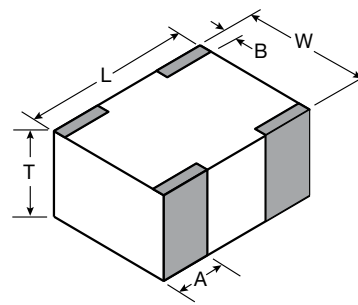


mm (inches)

<b>L</b>	3.08±0.1 (0.121±0.004)
<b>W</b>	1.60±0.1 (0.063±0.004)
<b>T</b>	0.87±0.1 (0.034±0.004)
<b>A</b>	0.61±0.25 (0.028±0.010)
<b>B</b>	0.35±0.15 (0.014±0.006)

#### TERMINAL AND LAYOUT (TOP VIEW)

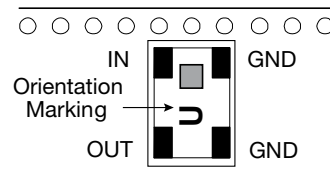

#### RECOMMENDED PAD LAYOUT

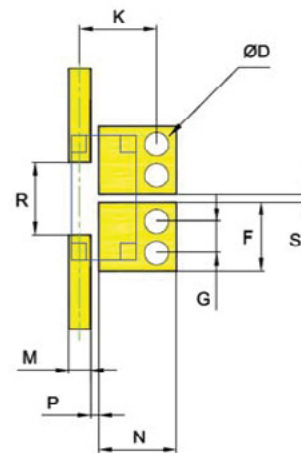

mm (inches)

<b>F</b>	1.70±0.05 (0.067±0.002)
<b>G</b>	0.78±0.05 (0.031±0.002)
<b>K</b>	1.91±0.10 (0.075±0.004)
<b>M</b>	0.54±0.025 (0.021±0.001)
<b>N</b>	1.93±0.05 (0.076±0.002)
<b>P</b>	0.21±0.04 (0.008±0.002)
<b>R</b>	1.80±0.04 (0.071±0.002)
<b>S</b>	0.20±0.04 (0.008±0.002)
<b>D</b>	0.60±0.10 (0.024±0.004)

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W


### LP1206A3600ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 3.6GHz	R.Loss @ 3.6GHz	Attenuation
LP1206A3600ASTR	0.7dB max.	-25dB	-30dB at 5.04GHz -35dB at 7.2GHz -25dB at 10.8GHz

#### TYPICAL ELECTRICAL PERFORMANCE

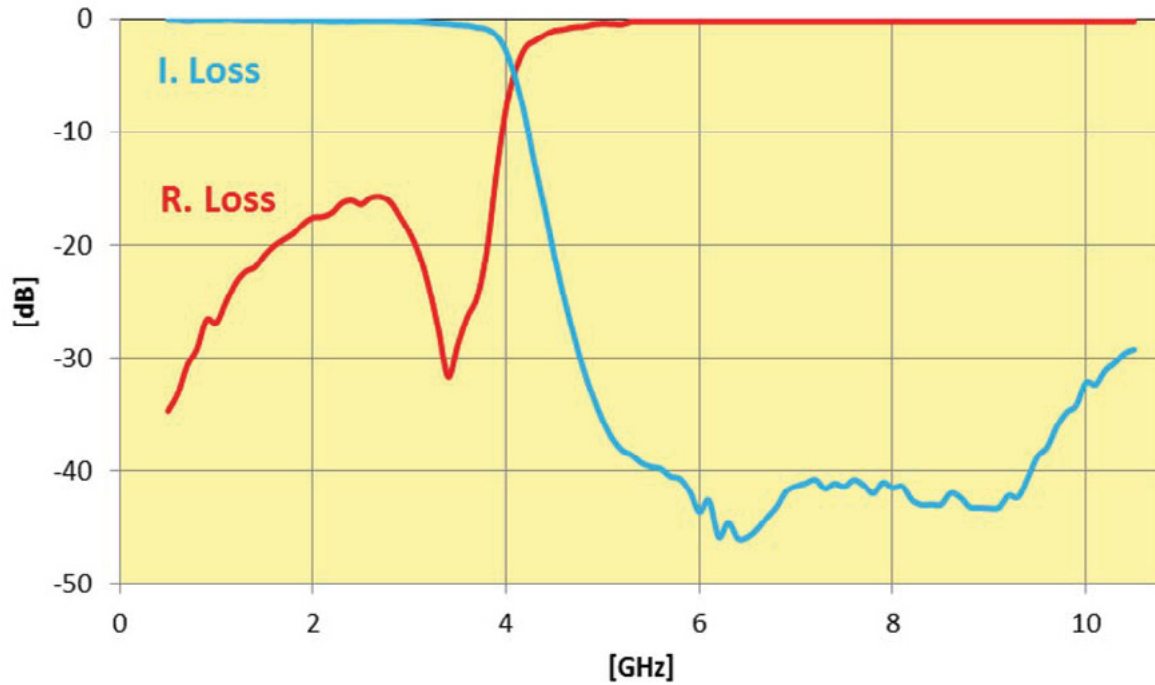



# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A3800ASTR – SMD Termination



#### ITF TECHNOLOGY

The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.


#### FEATURES

- Small size: 1206
- Frequency: 3.8GHz
- Sharp attenuation slope
- Characteristic impedance: 50Ohm
- Operating/Storage temp: -40°C – +85°C
- Low profile
- Rugged construction
- Taped and reeled
- Power handling: 8W

#### APPLICATIONS

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

#### HOW TO ORDER

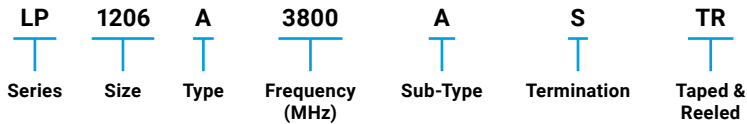

#### FINAL QUALITY INSPECTION


Finished parts are 100% tested for electrical parameters and visual/ mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours

#### TERMINATION


Nickel/ Lead free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

#### RECOMMENDED PAD LAYOUT

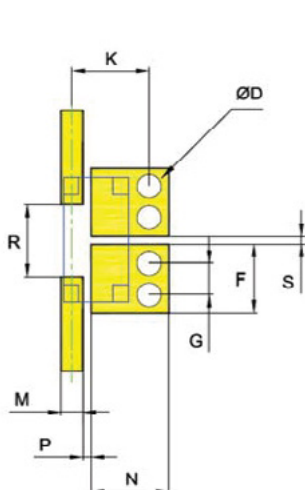


	mm
F	1.70±0.05 (0.067±0.002)
G	0.78±0.05 (0.031±0.002)
K	1.91±0.10 (0.075±0.004)
M	0.54±0.025 (0.021±0.001)
N	1.93±0.05 (0.076±0.002)
P	0.21±0.04 (0.008±0.002)
R	1.80±0.04 (0.071±0.002)
S	0.20±0.04 (0.008±0.002)
D	0.60±0.10 (0.024±0.004)

#### DIMENSIONS (TOP VIEW)

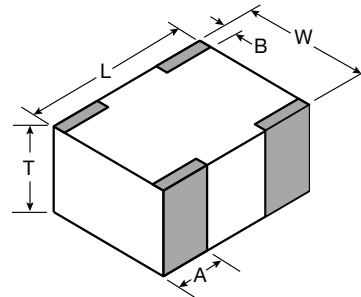

	mm (inches)
L	3.08±0.1 (0.121±0.004)
W	1.60±0.1 (0.063±0.004)
T	0.87±0.1 (0.034±0.004)
A	0.61±0.25 (0.028±0.010)
B	0.35±0.15 (0.014±0.006)

#### TERMINAL AND LAYOUT (TOP VIEW)

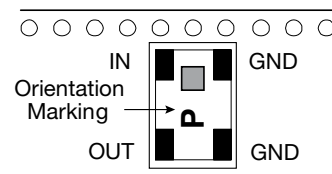

# Thin-Film RF/Microwave Filters

## 1206 High Performance Low Pass 8W

### LP1206A3800ASTR – SMD Termination



#### ELECTRICAL CHARACTERISTICS

P/N	I.Loss @ 3.6GHz	R.Loss @ 3.6GHz	Attenuation
LP1206A3800ASTR	0.8dB max.	-20dB	-35dB at 5.32GHz -28dB at 7.6GHz -33dB at 10GHz

#### TYPICAL ELECTRICAL PERFORMANCE

