





MOTOROLA

Hex 1-Input Inverter Gate

ELECTRICALLY TESTED PER:
MIL-M-38510/33002

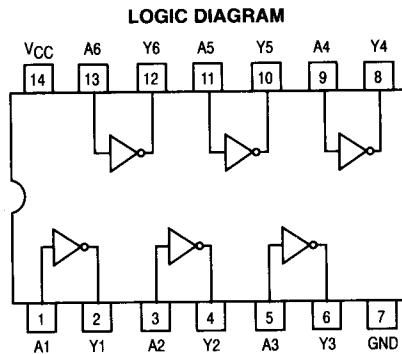

WAVEFORMS

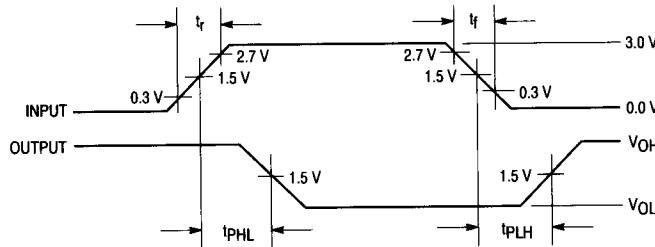

4

NOTES:

- Pulse generator has the following characteristics: $t_r = t_f \leq 2.5$ ns, PRR = 1.0 MHz, and $Z_{OUT} \approx 50 \Omega$.
- Terminal conditions (pins not designated) may be high ≥ 2.0 V, low ≤ 0.8 V, or open.
- $C_L = 50 \text{ pF} \pm 10\%$, including scope probe, wiring and stray capacitance, without package in test fixture.
- Voltage measurements are to be made with respect to network ground terminal.
- $R_L = 500 \Omega \pm 5.0\%$.

Military 54F04



AVAILABLE AS:

- JAN: JM38510/33002BXA
- SMD: N/A
- 883: 54F04/BXAJCX

X = CASE OUTLINE AS FOLLOWS:
PACKAGE: CERDIP: C
CERFLAT: D
LCC: 2

THE LETTER "M" APPEARS
BEFORE THE / ON LCC.

PIN ASSIGNMENTS


FUNCT.	DIL 632-08	FLATS 717-04	LCC 756A-02	BURN-IN (COND. A)
A1	1	1	2	VCC
Y1	2	2	3	OPEN
A2	3	3	4	VCC
Y2	4	4	6	OPEN
A3	5	5	8	VCC
Y3	6	6	9	OPEN
GND	7	7	10	GND
Y4	8	8	12	OPEN
A4	9	9	13	VCC
Y5	10	10	14	OPEN
A5	11	11	16	VCC
Y6	12	12	18	OPEN
A6	13	13	19	VCC
VCC	14	14	20	VCC

BURN-IN CONDITIONS:
 $V_{CC} = 5.0 \text{ V MIN}/6.0 \text{ V MAX}$

TRUTH TABLE

A	Y
0	1
1	0

AC TEST CIRCUIT

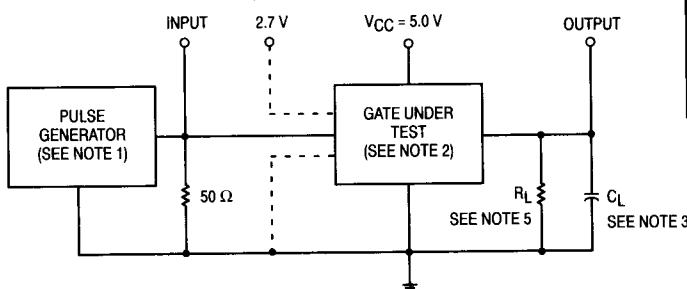

Symbol	Parameter	Limits						Unit	Test Condition (Unless Otherwise Specified)			
Static Parameters:	+ 25°C		+ 125°C		- 55°C							
	Subgroup 1		Subgroup 2		Subgroup 3							
	Min	Max	Min	Max	Min	Max						
V _{OH}	Logical "1" Output Voltage	2.5		2.5		2.5		V	V _{CC} = 4.5 V, I _{OH} = -1.0 mA, V _{IL} = 0.8 V.			
V _{OL}	Logical "0" Output Voltage		0.5		0.5		0.5	V	V _{CC} = 4.5 V, I _{OL} = 20 mA, V _{IH} = 2.0 V.			
V _{IC}	Input Clamping Voltage		-1.2					V	V _{CC} = 4.5 V, I _{IN} = -18 mA.			
I _{IH}	Logical "1" Input Current		20		20		20	μA	V _{CC} = 5.5 V, V _{IH} = 2.7 V.			
I _{IHH}	Logical "1" Input Current		100		100		100	μA	V _{CC} = 5.5 V, V _{IN} = 7.0 V.			
I _{IL}	Logical "0" Input Current	-0.03	-0.6	-0.03	-0.6	-0.03	-0.6	mA	V _{CC} = 5.5 V, V _{IN} = 0.5 V.			
I _{OD}	Diode Current	60		60		60		mA	V _{CC} = 4.5 V, V _{IN} = 5.5 V, V _{OUT} = 2.5 V.			
I _{OS}	Output Short Circuit Current	-60	-150	-60	-150	-60	-150	mA	V _{CC} = 5.5 V, V _{IN} = 0 V, V _{OUT} = 0 V.			
I _{CCH}	Power Supply Current		4.2		4.2		4.2	mA	V _{CC} = 5.5 V, V _{IN} = 0 V.			
I _{CCL}	Power Supply Current		15.3		15.3		15.3	mA	V _{CC} = 5.5 V, V _{IN} = 5.5 V.			
V _{IH}	Logical "1" Input Voltage	2.0		2.0		2.0		V	V _{CC} = 4.5 V.			
V _{IL}	Logical "0" Input Voltage		0.8		0.8		0.8	V	V _{CC} = 4.5 V.			
	Functional Tests	Subgroup 7		Subgroup 8A		Subgroup 8B			per Truth Table with V _{CC} = 5.0 V, V _{INL} = 0.5 V, and V _{INH} = 2.5 V.			

Symbol	Parameter	Limits						Unit	Test Condition (Unless Otherwise Specified)			
Switching Parameters:	+ 25°C		+ 125°C		- 55°C							
	Subgroup 9		Subgroup 10		Subgroup 11							
	Min	Max	Min	Max	Min	Max						
t _{PHL}	Propagation Delay /Data-Output Output High-Low	1.5	4.3	1.5	6.5	1.5	6.5	ns	V _{CC} = 5.0 V, C _L = 50 pF, R _L = 500 Ω.			
t _{PLH}	Propagation Delay /Data-Output Output Low-High	2.4	5.0	2.0	7.0	2.0	7.0	ns	V _{CC} = 5.0 V, C _L = 50 pF, R _L = 500 Ω.			