


DC1-80 SERIES MECHANICAL SPECIFICATIONS

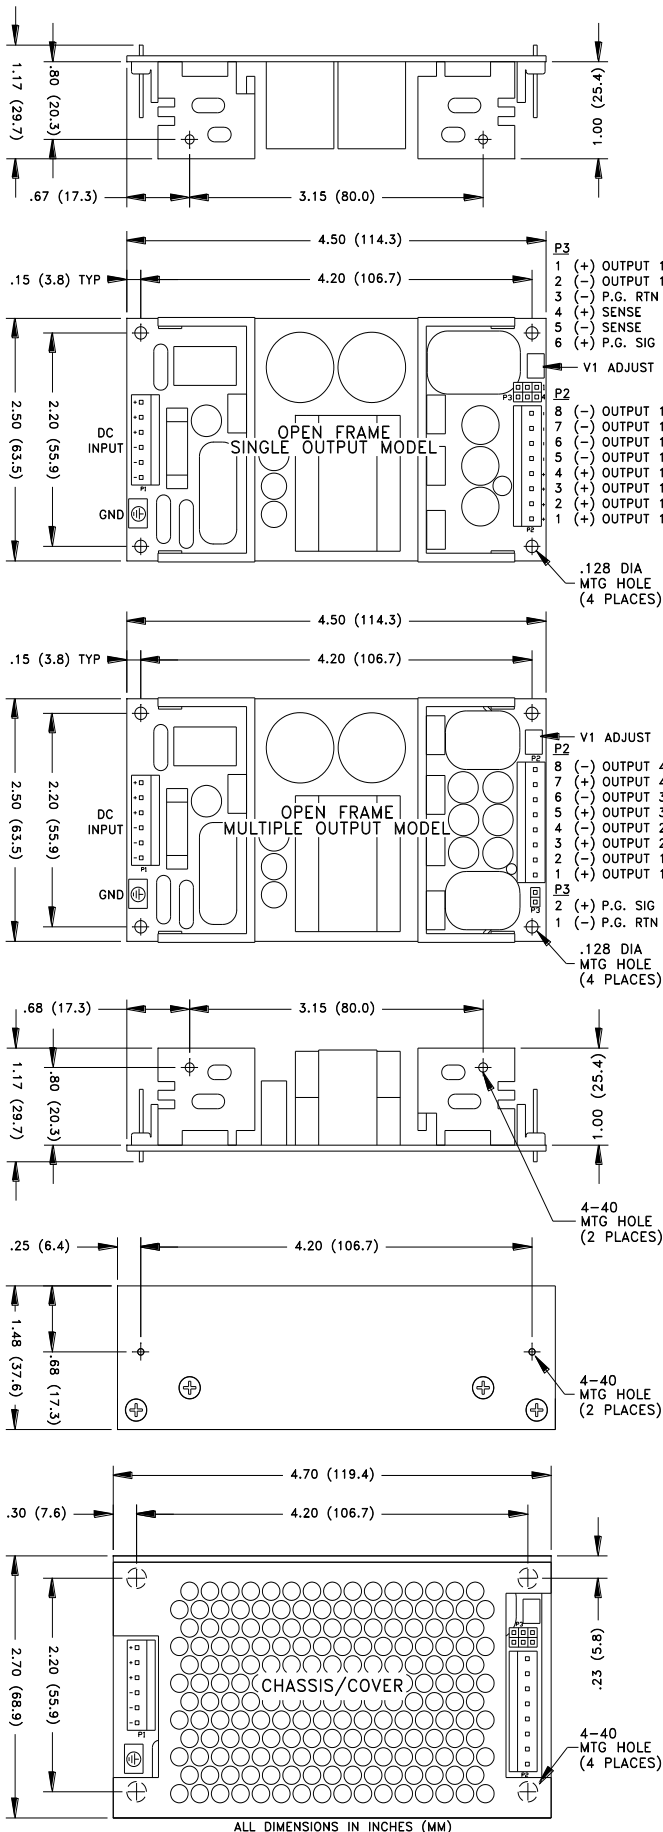


APPLICATIONS INFORMATION

- Each output can deliver its rated current but total output power must not exceed 80W or as determined by the cooling requirements.
- Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
- Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
- This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
- A minimum load of 10% is required on each output to ensure specified centering and regulation of each output.
- Peak-to-Peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz bandwidth.
- This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC 60601-1:2005. In consideration of Clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength test on the power supply or the end product. It is highly recommended that the DC test voltages listed in DVB.1, Annex DVB of UL 60601-1 1st Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- Remote-Sense terminals may be used to compensate for cable losses up to 250mV (single output models only). The use of a twisted pair, decoupling capacitors and an appropriately-rated low-impedance capacitor connected across the load will increase noise immunity.
- Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.250 inches.
- Power good feature provides a logic-high signal from an open collector transistor when DC input reaches minimum operating voltage.
- 300LFM minimum of airflow must be maintained one inch above all points of top-side components or cover when forced-air cooling is required.

CONNECTOR SPECIFICATIONS

| | | |
|----|----------------------------|---|
| P1 | DC Input | 0.156 friction lock header mates with TE Connectivity 770849-6 or equivalent crimp terminal housing with TE Connectivity 3-640707-1 or equivalent crimp terminal. |
| P2 | DC Output | 0.156 friction lock header mates with TE Connectivity 770849-8 or equivalent crimp terminal housing with TE Connectivity 3-640707-1 or equivalent crimp terminal. |
| G | Ground | 0.187 quick disconnect terminal. |
| P3 | Power Good /Sense (Single) | 0.100 breakaway header mates with Molex 22-55-2061 or equivalent crimp terminal housing with Molex type 71851 or equivalent crimp terminal. |
| P3 | Power Good (Multiple) | 0.100 breakaway header mates with Molex 50-57-9002 or equivalent crimp terminal housing with Molex type 71851 or equivalent crimp terminal. |

MAXIMUM OUTPUT POWER vs. AMBIENT TEMPERATURE

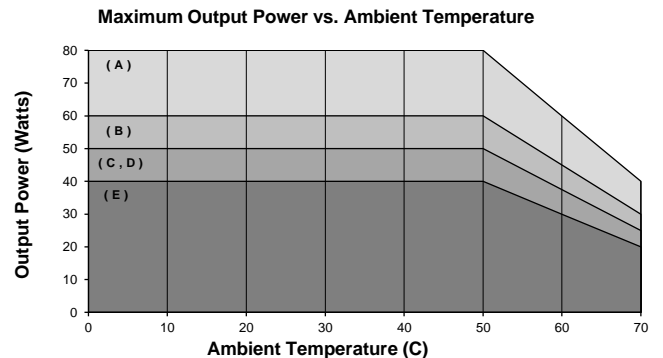

OUTPUT RATING:

- 80 Watts Max. Output Power with 300 LFM Forced Air. Open Frame or with Chassis/Cover.
- 60 Watts Max. Output Power Convection Cooled. Open Frame or with Chassis. Singles.
- 50 Watts Max. Output Power Convection Cooled. Open Frame or with Chassis. Multi's.
- 50 Watts Max. Output Power Convection Cooled with Chassis/Cover. Singles.
- 40 Watts Max. Output Power Convection Cooled with Chassis/Cover. Multi's.

REV. C 10/06/2022