

High Reliability Chip - COG/NPO - 16Vdc to 10kVdc

A range of MLC chip capacitors in Ultra stable EIA Class I COG/NPO, dielectric with special testing for long term reliability. They are designed for optimum reliability; burned in at elevated voltage and temperature, and 100% physically and electrically inspected to ascertain conformance to strict performance criteria. Units may be tested in accordance with MIL-PRF-55681, MIL-PRF-123, MIL-PRF-49467 or customer SCD.

Designed for surface mount application with nickel barrier terminations making them suitable for solder wave and reflow solder board attachment as well as vapor phase attachment for part sizes 2225 or smaller. Silver-palladium terminations are also available for hybrid use with conductive epoxy.

COG/NPO chips are used in precision circuitry requiring Class I stability and exhibit linear temperature coefficient, low loss and stable electrical properties with time, voltage and frequency.

They find application for High Reliability use such as medical implanted devices, aerospace, airborne and military use as well as consumer uses requiring safety margins not attainable with commercial products.

Standard EIA case sizes and available C/V values are listed below - special sizes, thicknesses and other voltage ratings are available; please contact the Sales Office for information.




Capacitance and voltage selection for popular chip sizes

Size	0402	0504	0603	0805	1206	1206	1210	1515	1808		1812		1825	
Min cap.	0R3	0R5	0R3	0R5	0R5	3R0	5R0	3R0	5R0	5R0	100	100	150	150
Tmax inches: mm:	0.024 0.61	0.044 1.12	0.035 0.89	0.054 1.37	0.054 1.37	0.064 1.63	0.065 1.63	0.130 3.02	0.065 1.63	0.080* 2.03	0.065 1.63	0.100* 2.54	0.080 2.03	0.140* 3.56
16V	81	152	102	392	562	103	223	393	223	273	473	473	104	104
25V	181	152	102	392	562	123	223	393	223	273	473	473	104	104
50V	181	152	102	392	562	123	223	333	183	223	393	393	104	104
100V	101	821	561	222	332	682	123	273	123	183	273	273	683	823
200V	101	561	331	152	222	392	822	223	822	103	153	273	473	683
250V	390	391	271	102	152	272	562	183	562	682	123	183	273	473
300V	•	•	•	681	681	182	392	123	392	472	822	123	223	273
400V	•	•	•	681	561	152	392	822	392	472	822	103	183	183
500V	•	•	•	681	561	152	392	682	392	392	822	103	183	183
600V	•	•	•	•	•	122	392	682	392	392	822	103	183	183
800V[†]	•	•	•	•	•	102	222	472	222	222	472	682	123	153
1kV[†]	•	•	•	•	•	681	152	392	152	152	332	562	822	123
1.5kV[†]	•	•	•	•	•	271	681	222	681	102	152	222	392	682
2kV[†]	•	•	•	•	•	151	391	122	391	391	821	122	222	392
3kV[†]	•	•	•	•	•	•	•	561	181	181	391	561	102	182
4kV[†]	•	•	•	•	•	•	•	•	•	•	•	•	391	681
5kV[†]	•	•	•	•	•	•	•	•	•	•	•	•	221	471
6kV[†]	•	•	•	•	•	•	•	•	•	•	•	•	•	•
7kV[†]	•	•	•	•	•	•	•	•	•	•	•	•	•	•
8kV[†]	•	•	•	•	•	•	•	•	•	•	•	•	•	•
9kV[†]	•	•	•	•	•	•	•	•	•	•	•	•	•	•
10kV[†]	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Note: † Units rated above 800V may require conformal coating to preclude arcing over chip surface. Maximum voltage for MIL-PRF-123 tested parts is 1kV.

High Reliability Chip - COG/NPO - 16Vdc to 10kVdc

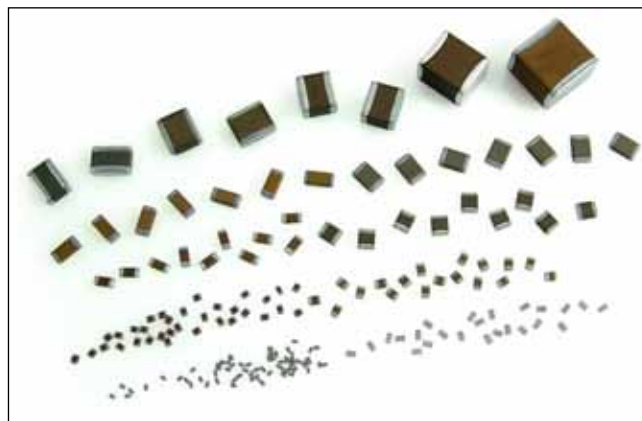

Note: Maximum capacitance values are shown below as 3 digit code: 2 significant figures followed by the no. of zeros e.g. 183 = 18,000pF.

Capacitance and voltage selection for popular chip sizes

2020	2221	2225		2520	3333	3530	4040	4540	5440	5550	6560	7565	Size
270	270	270	270	390	390	390	390	390	390	390	560	101	Min cap.
0.180 4.57	0.080 2.03	0.080 2.03	0.150* 3.81	0.180 4.57	0.250 6.35	0.250 6.35	0.300 7.62	0.300 7.62	0.300 7.62	0.300 7.62	0.300 7.62	0.300 7.62	inches: Tmax mm:
683	104	124	124	104	184	184	334	334	334	394	684	824	16V
683	104	124	124	104	184	184	334	334	334	394	684	824	25V
683	104	124	124	104	154	184	274	334	274	394	564	824	50V
563	683	823	104	823	124	154	224	274	224	274	474	564	100V
473	393	473	823	683	104	104	184	184	184	224	394	474	200V
393	223	273	563	563	823	104	154	184	184	224	394	474	250V
333	183	273	473	473	823	823	154	154	154	184	334	394	300V
223	183	273	273	333	563	563	124	124	124	154	274	334	400V
153	183	273	273	183	473	473	823	104	104	124	224	274	500V
153	183	273	273	183	393	393	683	823	823	124	184	274	600V
103	103	153	223	123	333	333	563	683	683	104	154	184	800V[†]
103	822	123	183	123	273	273	473	563	563	823	124	184	1kV[†]
682	392	562	103	822	183	183	333	393	393	563	823	124	1.5kV[†]
392	182	272	562	472	153	153	223	273	333	473	683	823	2kV[†]
182	821	122	272	222	682	682	153	183	183	273	393	473	3kV[†]
681	331	471	102	102	272	272	562	682	822	103	153	223	4kV[†]
391	221	331	681	561	182	182	392	472	472	682	103	123	5kV[†]
•	•	•	•	•	152	152	272	332	332	472	822	822	6kV[†]
•	•	•	•	•	•	821	152	182	182	272	392	472	7kV[†]
•	•	•	•	•	•	•	102	122	122	182	272	392	8kV[†]
•	•	•	•	•	•	•	•	821	102	122	222	272	9kV[†]
•	•	•	•	•	•	•	•	681	821	122	182	222	10kV[†]

Note: † Units rated above 800V may require conformal coating to preclude arcing over chip surface
Maximum voltage for MIL-PRF-123 tested parts is 1kV

Should be ordered as Novacap parts.

www.knowlescapacitors.com