

## DM74LS367A Hex 3-STATE Buffers

### General Description


This device contains six independent gates each of which performs a non-inverting buffer function. The outputs have the 3-STATE feature. When enabled, the outputs exhibit the low impedance characteristics of a standard LS output with additional drive capability to permit the driving of bus lines without external resistors. When disabled, both the output transistors are turned off presenting a high-impedance state to the bus line. Thus the output will act neither as a signifi-

cant load nor as a driver. To minimize the possibility that two outputs will attempt to take a common bus to opposite logic levels, the disable time is shorter than the enable time of the outputs.

### Features

- Alternate military/aerospace device (54LS367A) is available. Contact a Fairchild Semiconductor sales office/distributor for specifications.

### Connection Diagram

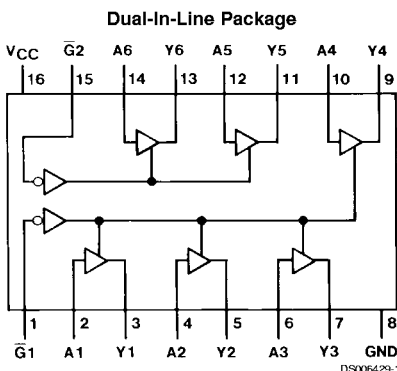

Order Number 54LS367ADMQB, 54LS367AFMQB, 54LS367ALMQB, DM54LS367AJ,  
DM54LS367AW, DM74LS367AM or DM74LS367AN  
See Package Number E20A, J16A, M16A, N16E or W16A

### Function Table

$$Y = A$$

| Inputs |           | Output |
|--------|-----------|--------|
| A      | $\bar{G}$ | Y      |
| L      | L         | L      |
| H      | L         | H      |
| X      | H         | Hi-Z   |

H = High Logic Level  
L = Low Logic Level  
X = Either Low or High Logic Level  
Hi-Z = 3-STATE (Outputs are disabled)

## Absolute Maximum Ratings (Note 1)

|                                      |    |                           |                 |
|--------------------------------------|----|---------------------------|-----------------|
| Supply Voltage                       | 7V | DM54LS                    | -55°C to +125°C |
| Input Voltage                        | 7V | DM74LS                    | 0°C to +70°C    |
| Operating Free Air Temperature Range |    | Storage Temperature Range | -65°C to +150°C |

## Recommended Operating Conditions

| Symbol          | Parameter                      | DM54LS367A |     |     | DM74LS367A |     |      | Units |
|-----------------|--------------------------------|------------|-----|-----|------------|-----|------|-------|
|                 |                                | Min        | Nom | Max | Min        | Nom | Max  |       |
| V <sub>CC</sub> | Supply Voltage                 | 4.5        | 5   | 5.5 | 4.75       | 5   | 5.25 | V     |
| V <sub>IH</sub> | High Level Input Voltage       | 2          |     |     | 2          |     |      | V     |
| V <sub>IL</sub> | Low Level Input Voltage        |            |     | 0.7 |            |     | 0.8  | V     |
| I <sub>OH</sub> | High Level Output Current      |            |     | -1  |            |     | -2.6 | mA    |
| I <sub>OL</sub> | Low Level Output Current       |            |     | 12  |            |     | 24   | mA    |
| T <sub>A</sub>  | Free Air Operating Temperature | -55        |     | 125 | 0          |     | 70   | °C    |

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

## Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

| Symbol           | Parameter   | Conditions   | Min             | Typ<br>(Note 2) | Max  | Units |
|------------------|---|--|-----------------|-----------------|------|-------|
| V <sub>I</sub>   | Input Clamp Voltage   | V <sub>CC</sub> = Min, I <sub>I</sub> = -18 mA   |                 |                 | -1.5 | V     |
| V <sub>OH</sub>  | High Level Output Voltage                                       | V <sub>CC</sub> = Min, I <sub>OH</sub> = Max<br>V <sub>IL</sub> = Max, V <sub>IH</sub> = Min | 2.4             | 3.4             |      | V     |
| V <sub>OL</sub>  | Low Level Output Voltage  | V <sub>CC</sub> = Min, I <sub>OL</sub> = Max   | DM54            | 0.25            | 0.4  | V     |
|                  |   | V <sub>IL</sub> = Max, V <sub>IH</sub> = Min   | DM74            | 0.35            | 0.5  |       |
|                  |   | I <sub>OL</sub> = 12 mA, V <sub>CC</sub> = Min   | DM74            | 0.25            | 0.4  |       |
| I <sub>I</sub>   | Input Current @ Max Input Voltage                               | V <sub>CC</sub> = Max, V <sub>I</sub> = 7V   |                 |                 | 0.1  | mA    |
| I <sub>IH</sub>  | High Level Input Current  | V <sub>CC</sub> = Max, V <sub>I</sub> = 2.7V   |                 |                 | 20   | μA    |
| I <sub>IL</sub>  | Low Level Input Current   | V <sub>CC</sub> = Max, V <sub>I</sub> = 0.5V<br>(Note 5)                                     | A Input         |                 | -20  | mA    |
|                  |   | V <sub>CC</sub> = Max, V <sub>I</sub> = 0.4V<br>(Note 6)                                     | A Input         |                 | -0.4 |       |
|                  |   | V <sub>CC</sub> = Max, V <sub>I</sub> = 0.4V   | $\bar{G}$ Input |                 | -0.4 |       |
| I <sub>ozH</sub> | Off-State Output Current with High Level Output Voltage Applied | V <sub>CC</sub> = Max, V <sub>O</sub> = 2.4V<br>V <sub>IH</sub> = Min, V <sub>IL</sub> = Max |                 |                 | 20   | μA    |
| I <sub>ozL</sub> | Off-State Output Current with Low Level Output Voltage Applied  | V <sub>CC</sub> = Max, V <sub>O</sub> = 0.4V<br>V <sub>IH</sub> = Min, V <sub>IL</sub> = Max |                 |                 | -20  | μA    |
| I <sub>os</sub>  | Short Circuit Output Current                                    | V <sub>CC</sub> = Max<br>(Note 3)  | DM54            | -20             | -100 | mA    |
|                  |   |  | DM74            | -20             | -100 |       |
| I <sub>CC</sub>  | Supply Current  | V <sub>CC</sub> = Max (Note 4)   |                 | 14              | 24   | mA    |

**Note 2:** All typicals are at V<sub>CC</sub> = 5V, T<sub>A</sub> = 25°C.

**Note 3:** Not more than one output should be shorted at a time, and the duration should not exceed one second.

**Note 4:** I<sub>CC</sub> is measured with the DATA inputs grounded and the OUTPUT CONTROLS at 4.5V.

**Note 5:** Both  $\bar{G}$  inputs are at 2V.

**Note 6:** Both  $\bar{G}$  inputs at 0.4V.

## Switching Characteristics



at  $V_{CC} = 5V$  and  $T_A = 25^\circ C$

| Symbol    | Parameter   | $R_L = 667\Omega$    |     |                       |     | Units |
|-----------|---|----------------------|-----|-----------------------|-----|-------|
|           |   | $C_L = 50\text{ pF}$ |     | $C_L = 150\text{ pF}$ |     |       |
|           |   | Min                  | Max | Min                   | Max |       |
| $t_{PLH}$ | Propagation Delay Time Low to High Level Output     |                      | 16  |                       | 25  | ns    |
| $t_{PHL}$ | Propagation Delay Time High to Low Level Output     |                      | 16  |                       | 25  | ns    |
| $t_{PZH}$ | Output Enable Time to High Level Output             |                      | 30  |                       | 40  | ns    |
| $t_{PZL}$ | Output Enable Time to Low Level Output              |                      | 30  |                       | 40  | ns    |
| $t_{PHZ}$ | Output Disable Time from High Level Output (Note 7) |                      | 20  |                       |     | ns    |
| $t_{PLZ}$ | Output Disable Time from Low Level Output (Note 7)  |                      | 20  |                       |     | ns    |


**Note 7:**  $C_L = 5\text{ pF}$ .



**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

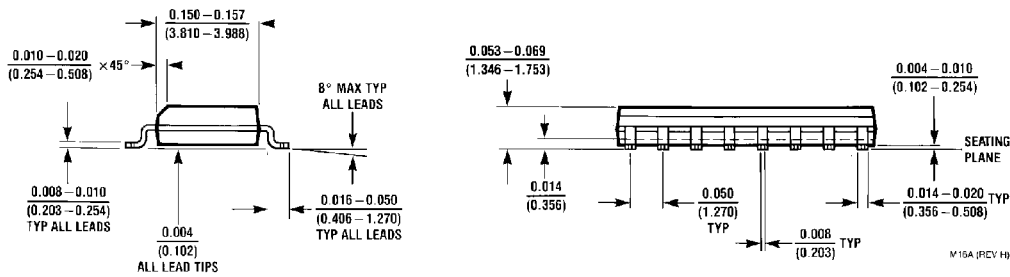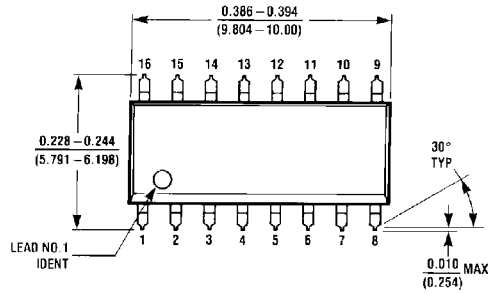


**16-Lead Small Outline Molded Package (M)**  
**Order Number DM74LS367AM**  
**Package Number M16A**

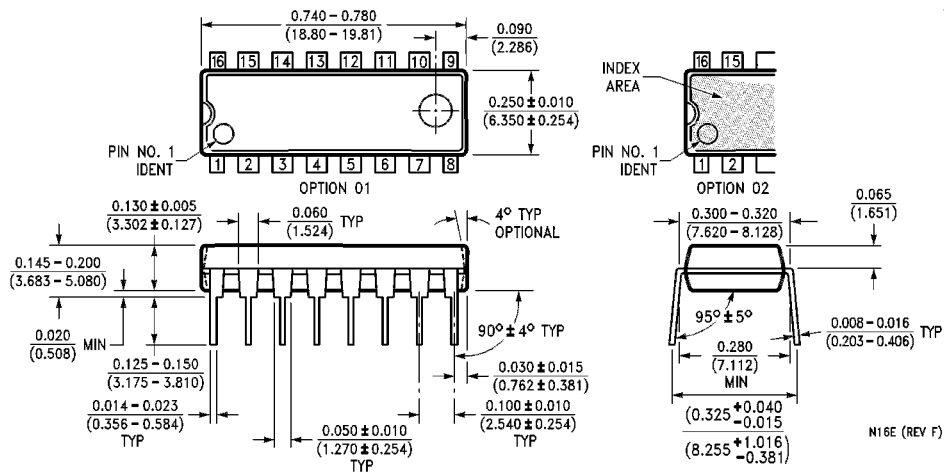

**16-Lead Molded Dual-In-Line Package (N)**  
**Order Number DM74LS367AN**  
**Package Number N16E**

**DM74LS367A Hex 3-STATE Buffers**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

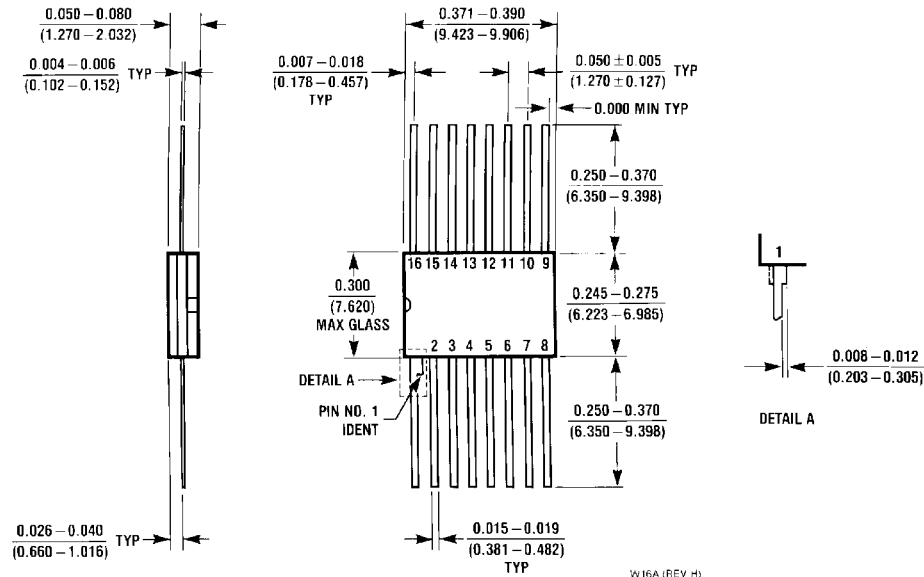

**16-Lead Ceramic Flat Package (W)**  
**Order Number 54LS367AFMQB or DM54LS367AW**  
**Package Number W16A**

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor Corporation  
 Americas  
 Customer Response Center  
 Tel: 1-888-522-5372

Fairchild Semiconductor Europe  
 Fax: +49 (0) 1 80-530 85 86  
 Email: europe.support@nsc.com  
 Deutsch Tel: +49 (0) 8 141-35-0  
 English Tel: +44 (0) 1 793-85-68-56  
 Italy Tel: +39 (0) 2 57 5631

Fairchild Semiconductor Hong Kong Ltd.  
 13th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: +852 2737-7200  
 Fax: +852 2314-0061

National Semiconductor Japan Ltd.  
 Tel: 81-3-5620-6175  
 Fax: 81-3-5620-6179

[www.fairchildsemi.com](http://www.fairchildsemi.com)